

RF AMPLIFIER

MODEL QBH-8137

Available as: QBH-8137, Hybrid SM (E52-19422)

Features

- High Gain: 12.7 dB Typical
- High Power: +21 dBm Typical
- Operating Temp. - 40 °C to +70 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta = 25 °C	MIN/MAX Ta = -40 °C to +70 °C
Frequency	10 - 200 MHz	10 - 200 MHz
Gain (dB)	12.7 ±0.5	—
Gain vs. Temperature	—	+0.6/-0.5 Max.
Gain Flatness	0.8	1.0 Max.
Reverse Isolation (dB)	-25	-25 Min.
VSWR In	1.5:1	1.5:1 Max.
VSWR Out	1.5:1	1.5:1 Max.
1 dB Compression (dBm)	+21	+19 Min.
Output Intercept point		
3rd Order	+38	+36 Min.
2nd Order	+48	+48 Min.
Noise Figure (dB)	4.0	4.5 Max.
Power Vdc	+15	+15
mA	94	99 Max.







Maximum Ratings

Ambient Operating Temperature -55°C to +125 °C
 Storage Temperature -65°C to + 150 °C
 Case Temperature + 125 °C
 DC Voltage + 17 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

Note:

1. Specifications are guaranteed when tested in a 50 Ohm system. Specifications indicated as typical are not guaranteed.

Typical Performance Data

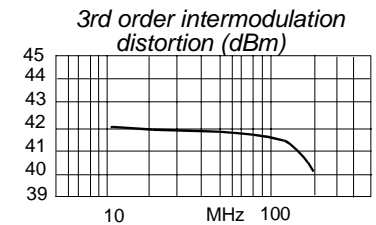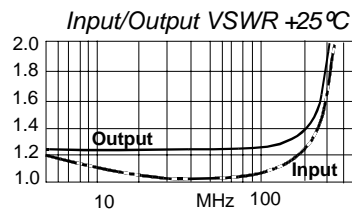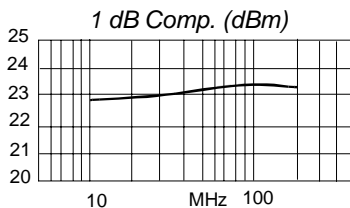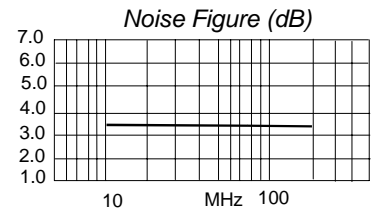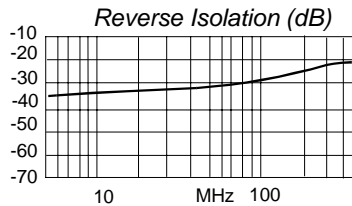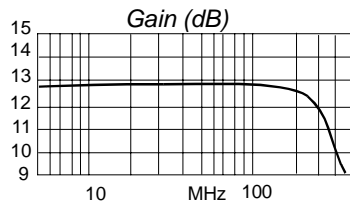

Legend ——— + 25 °C

Linear S-Parameters Data

FREQ. MHz	-- S11 -- dB Ang	-- S21 -- dB Ang	-- S12 -- dB Ang	-- S22 -- dB Ang
10	-25.7 -110.9	12.7 179.8	-34.6 16.1	-19.0 0.5
40	-35.0 -112.4	12.7 164.9	-33.5 20.8	-19.1 -24.5
50	-35.6 -113.4	12.7 160.6	-33.0 22.5	-19.1 -31.7
60	-35.3 -110.3	12.7 156.6	-32.5 23.7	-19.1 -38.7
80	-32.8 -106.7	12.7 148.4	-31.3 26.4	-19.0 -53.5
90	-31.5 -106.7	12.7 144.3	-30.7 26.8	-18.9 -60.8
100	-29.8 -106.4	12.7 140.3	-30.1 27.3	-18.8 -68.3
150	-23.1 -117.0	12.7 119.4	-27.4 23.1	-17.8 -107.8
200	-18.4 -133.0	12.6 97.9	-25.1 13.8	-15.8 -146.4



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 03/11/05

www.SpectrumMicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001