

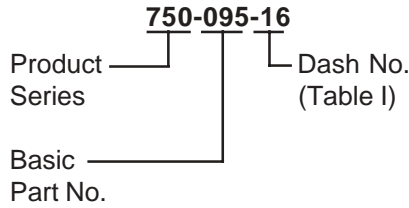


**750-095**  
**Type H Series 75 Flexible Metal-Core Conduit**

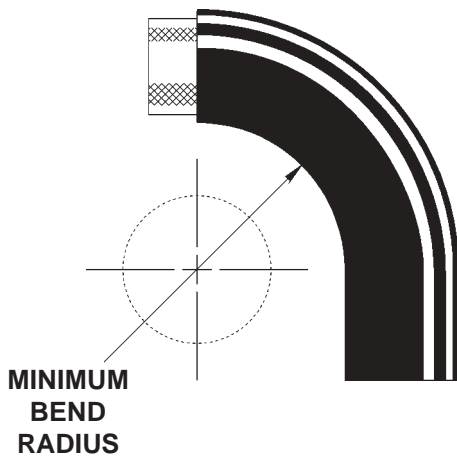

**TYPE H**  
**STAINLESS STEEL CONDUIT**  
**STAINLESS STEEL BRAID**  
**NEOPRENE JACKET \***

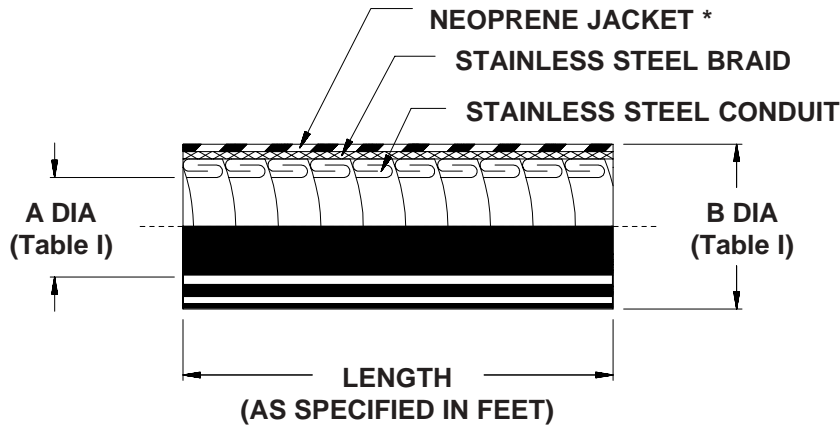

| TABLE I  |              |              |                     |
|----------|--------------|--------------|---------------------|
| DASH NO. | A DIA.       | B DIA MAX    | MINIMUM BEND RADIUS |
| 08       | .250 (6.4)   | .562 (14.3)  | 1.750 (44.5)        |
| 12       | .375 (9.5)   | .688 (17.5)  | 2.000 (50.8)        |
| 16       | .500 (12.7)  | .812 (20.6)  | 2.500 (63.5)        |
| 20       | .625 (15.9)  | .937 (23.8)  | 3.000 (76.2)        |
| 24       | .750 (19.1)  | 1.078 (27.4) | 3.750 (95.3)        |
| 32       | 1.000 (25.4) | 1.437 (36.5) | 5.000 (127.0)       |
| 40       | 1.250 (31.8) | 1.695 (43.1) | 6.250 (158.8)       |
| 48       | 1.500 (38.1) | 1.956 (49.7) | 7.750 (196.9)       |
| 56       | 1.750 (44.5) | 2.195 (55.8) | 8.500 (215.9)       |
| 64       | 2.000 (50.8) | 2.469 (62.7) | 10.000 (254.6)      |
| 80       | 2.500 (63.5) | 2.969 (75.4) | 12.500 (317.5)      |
| 96       | 3.000 (76.2) | 3.500 (88.9) | 15.000 (381.0)      |

Metric dimensions (mm) are in parentheses.

\* For other jacket materials or for conduit without the jacket, consult the factory.