


PROPOSED HOLE ARRANGEMENT:

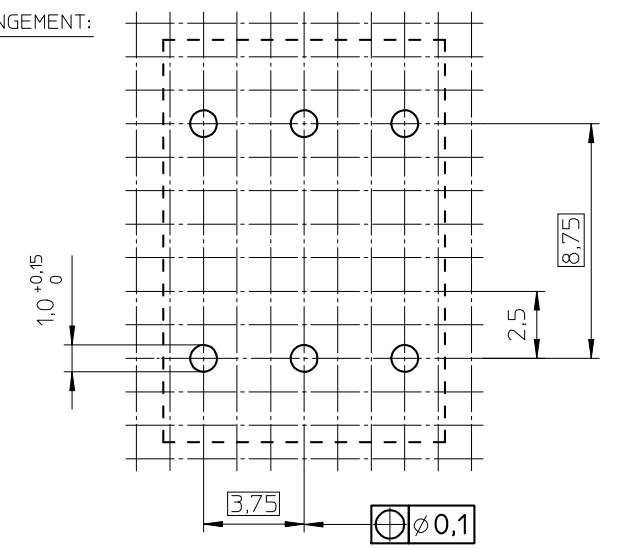

Coil former material: Sumikasuper E4008 (LCP), glass-reinforced
 UL file number: E54705 - UL94V-0.
 Max. operating temp.: 180°C.
 Pin material: CuSn, Sn plated.
 Solderability: IEC 60 068-2-20 Part 2, Test Ta, method 1.
 Winding area: 8,4 mm². (1.46x5.75)
 Mean length of turn: 19,8 mm.

CLASSNO.		CPV-RM4-1S-6PD-Z		2007-11-07	
NAME		4322 021 06961			
NAAM		A.Wojasz		SUPERV. 8222 294 48541	
MPA		CHECK CONTR.		DATE 2007-11-07	
		PROPERTY OF		© FERROXCUBE 2007	
		SPEC. NO.		112 - 001	
		REV.		069	
		SCALE		A3	