


HOLE PATTERN:
Space requirement 14x14 pitch

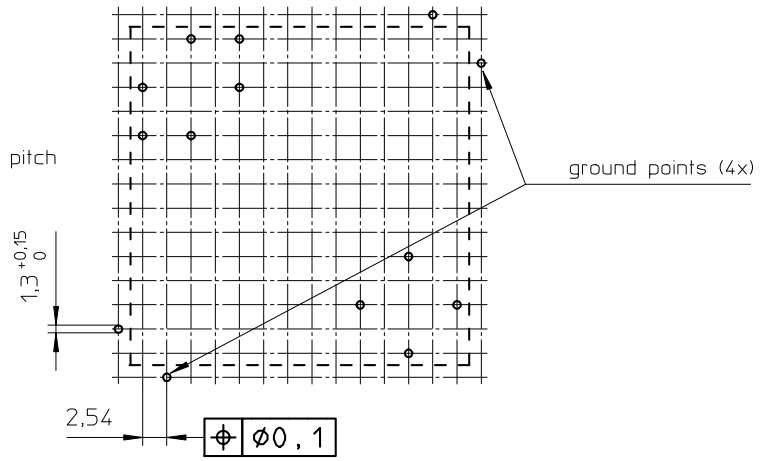

Coil former material: Sumikon PM-9630 (PF), glass-reinforced.
UL file number: E41429 - UL94V-0.
Pin material: CuSn - Ni flash, Sn plated.
Max. operating temp.: acc. to IEC 60 085 class H, 180°C.
Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3.5s.
Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2s.
Min. winding area: 112 mm².
Mean length of turn: 71 mm.

CLASSNO.		07-11-08	
NAME		CSV-RM14-1S-10P-C	
NAAM		4322 021 07071	
MPA		M.Tryngiel	
CHECK CONTR.		DAT. 07-11-08	
SUPERVISOR		1	
PROPERTY OF		Eigendom van	
DATE		07-11-08	
SPECIFICATION		112 - 001	
REVISION		010	
DRAWN		A3	
© FERROXCUBE 2008			