

KBPC15005 THRU KBPC1510

SINGLE PHASE SILICON BRIDGE RECTIFIER

VOLTAGE: 50 TO 1000V CURRENT: 15.0A




FEATURE

Surge overload rating:300 A peak
High case dielectric strength
1/4"Universal faston terminal
and ϕ 40ml lead-wire available

MECHANICAL DATA

Polarity: Polarity symbol marked on body
Mounting: Hole thru # 8 screw
Case: metal or plastic

KBPC/KBPCW

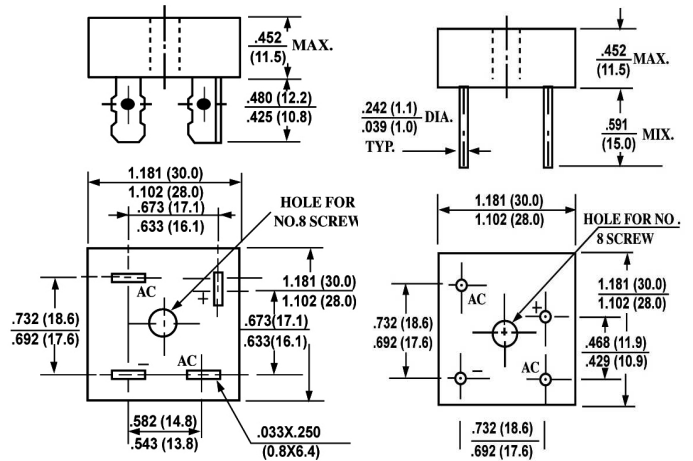

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half -wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated, for capacitive load, derate current by 20%)

	SYMBOL	KBPC15 005	KBPC15 01	KBPC15 02	KBPC15 04	KBPC15 06	KBPC15 08	KBPC15 10	units	
Maximum Recurrent Peak Reverse Voltage	V _{rrm}	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	V _{rms}	35	70	140	280	420	560	700	V	
Maximum DC blocking Voltage	V _{dc}	50	100	200	400	600	800	1000	V	
Maximum Average Forward Rectified Current at T _c =55°C	I _{f(av)}	15.0								A
Peak Forward Surge Current 8.3ms single Half sine-wave superimposed on rated load	I _{fsm}	300.0								A
* Maximum Instantaneous Forward Voltage at Forward current 7.5A DC	V _f	1.1								V
Maximum DC Reverse Current Ta =25°C at rated DC blocking voltage Ta =100°C	I _r	10.0 500.0								μ A μ A
Operating Temperature Range	T _j	-55 to +150								°C
Storage and Operation Junction Temperature	T _{stg}	-55 to +150								°C

Note:
Suffix "W" for wire type

RATINGS AND CHARACTERISTIC CURVES KBPC15005 THRU KBPC1510

1

FIG. 1 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

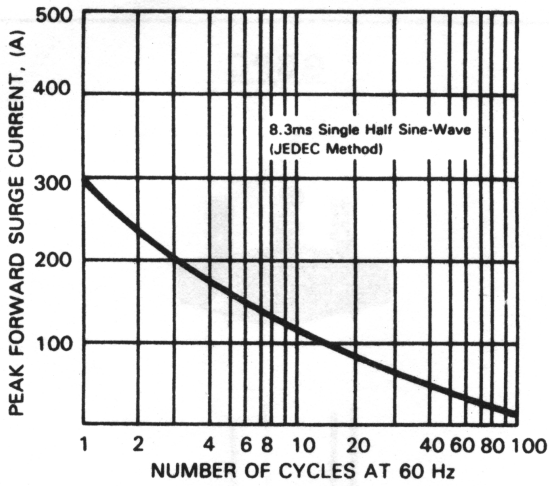


FIG. 2 - TYPICAL FORWARD CURRENT OPERATING CURVE

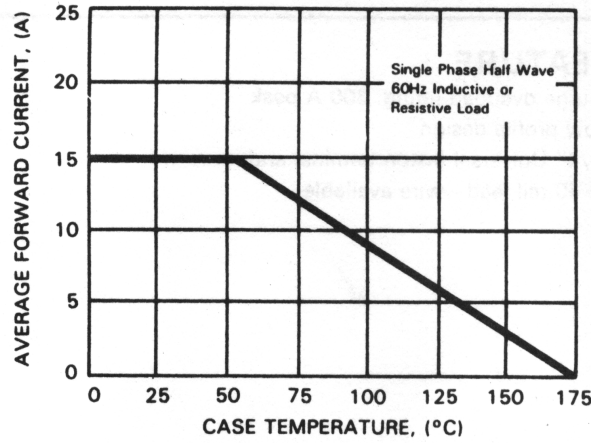


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

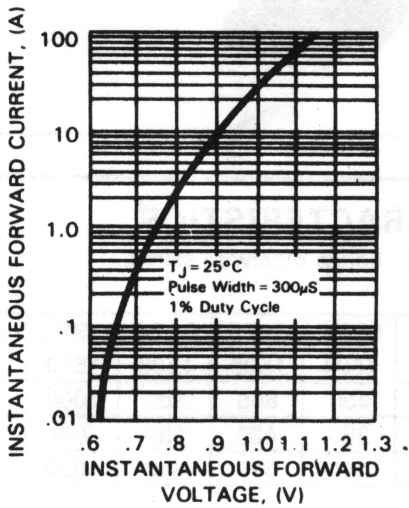


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

