



M28840/6 A EMI/RFI Environmental Backshell

Glenair Connector
Designator G

MIL-C-28840

M28840/6 16 W A


Basic Part No.

Style Designator - A = EMI/Environmental

Dash No. (Table II)

Material and Finish Designator
D = Corrosion Resistant Steel,
Cadmium Plate, Black
W = Aluminum, Cadmium Olive
Drab over Electroless Nickel

Shell Size	A Thread Class 2B	C Dia Max
11	.750 - 20 UNEF	1.028 (26.1)
13	.875 - 20 UNEF	1.141 (29.0)
15	1.000 - 20 UNEF	1.263 (32.1)
17	1.125 - 18 UNEF	1.387 (35.2)
19	1.250 - 18 UNEF	1.513 (38.4)
23	1.438 - 18 UNEF	1.703 (43.3)
25	1.562 - 18 UNEF	1.825 (46.4)
29	1.875 - 16 UN	2.143 (54.4)
33	2.062 - 16 UNS	2.329 (59.2)

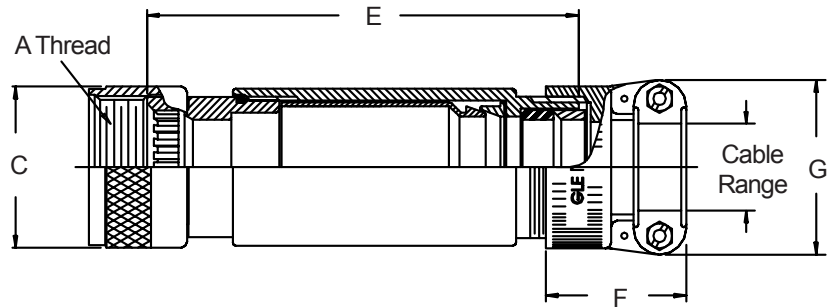

Dash No.	Shell Size Ref.	E		F Ref. Dim	G Ref. Dim	Cable Range			
		±.12	(3.0)			Min	Max		
01	11	3.62	(91.9)	1.281 (32.5)	.938 (23.8)	.188 (4.8)	.312 (7.9)		
02	13	3.62	(91.9)	1.281 (32.5)	.938 (23.8)	.188 (4.8)	.312 (7.9)		
03	13	3.62	(91.9)	1.281 (32.5)	1.125 (28.6)	.281 (7.1)	.438 (11.1)		
04	15	3.62	(91.9)	1.281 (32.5)	.938 (23.8)	.188 (4.8)	.312 (7.9)		
05	15	3.62	(91.9)	1.281 (32.5)	1.125 (28.6)	.281 (7.1)	.438 (11.1)		
06	15	3.62	(91.9)	1.281 (32.5)	1.312 (33.3)	.344 (8.7)	.562 (14.3)		
07	15	4.12	(104.6)	1.312 (33.3)	1.593 (40.5)	.438 (11.1)	.750 (19.1)		
08	17	4.12	(104.6)	1.281 (32.5)	1.312 (33.3)	.375 (9.5)	.625 (15.9)		
09	17	4.12	(104.6)	1.312 (33.3)	1.593 (40.5)	.438 (11.1)	.750 (19.1)		
10	17	4.12	(104.6)	1.406 (35.7)	1.750 (44.5)	.625 (15.9)	.938 (23.8)		
11	19	4.12	(104.6)	1.281 (32.5)	1.312 (33.3)	.375 (9.5)	.625 (15.9)		
12	19	4.12	(104.6)	1.406 (35.7)	1.750 (44.5)	.625 (15.9)	.938 (23.8)		
13	23	4.62	(117.3)	1.312 (33.3)	1.593 (40.5)	.438 (11.1)	.750 (19.1)		
14	23	4.62	(117.3)	1.406 (35.7)	1.750 (44.5)	.625 (15.9)	.938 (23.8)		
15	23	4.62	(117.3)	1.593 (40.5)	2.093 (53.2)	.812 (20.6)	1.188 (30.2)		
16	25	4.62	(117.3)	1.406 (35.7)	1.750 (44.5)	.625 (15.9)	.938 (23.8)		
17	25	5.12	(130.0)	1.593 (40.5)	2.093 (53.2)	.812 (20.6)	1.188 (30.2)		
18	25	5.12	(130.0)	1.593 (40.5)	2.093 (53.2)	.875 (22.2)	1.250 (31.8)		
19	25	5.12	(130.0)	1.625 (41.3)	2.343 (59.5)	1.000 (25.4)	1.380 (35.1)		
20	29	5.12	(130.0)	1.593 (40.5)	2.093 (53.2)	.812 (20.6)	1.188 (30.2)		
21	29	5.12	(130.0)	1.625 (41.3)	2.343 (59.5)	1.000 (25.4)	1.380 (35.1)		
22	33	5.12	(130.0)	1.625 (41.3)	2.343 (59.5)	1.000 (25.4)	1.380 (35.1)		
23	33	5.12	(130.0)	1.900 (48.3)	2.750 (69.9)	1.250 (31.8)	1.625 (41.3)		
24	11	3.62	(91.9)	1.281 (32.5)	1.125 (28.6)	.281 (7.1)	.438 (11.1)		
25	11	3.62	(91.9)	1.281 (32.5)	1.312 (33.3)	.344 (8.7)	.562 (14.3)		
26	13	3.62	(91.9)	1.281 (32.5)	1.312 (33.3)	.344 (8.7)	.562 (14.3)		
27	13	4.12	(104.6)	1.281 (32.5)	1.312 (33.3)	.375 (9.5)	.625 (15.9)		
28	15	4.12	(104.6)	1.281 (32.5)	1.312 (33.3)	.375 (9.5)	.625 (15.9)		

1. For complete dimensions see applicable Military Specification.
2. Metric dimensions (mm) are indicated in parentheses.
3. Cable range is defined as the accommodations range for the wire bundle or cable. Dimensions shown are not intended for inspection criteria.