

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0190990035**
Status: **Active**
Description: InsulKrimp™ Snap Spade for 16-14 AWG Wire, Stud Size 10, Mylar Tape Carrier, Length 23.34mm (.919")

Documents:

[Drawing \(PDF\)](#) [Product Specification PS-19902-009 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR18689
 UL E32244

General

Product Family Ring and Spade Terminals
 Series [19099](#)
 Crimp Quality Equipment Yes
 Mil-Spec N/A
 Product Name InsulKrimp™
 Type Spade Snap

Physical


Barrel Type Closed
 Color - Resin Natural
 Flammability 94V-2
 Insulation PVC
 Material - Plating Mating Tin
 Packaging Type Adhesive Tape on Reel
 Stud Size 10 (M5)
 Wire Insulation Diameter 4.40mm (.175") max.
 Wire Size AWG 14, 16
 Wire Size mm² 1.00 - 2.60

Material Info

Old Part Number BB-2717-10XT

Reference - Drawing Numbers

Product Specification PS-19902-009
 Sales Drawing BBCD20503



*Series
 image - Reference only*

EU RoHS

**ELV and RoHS
 Compliant**
REACH SVHC
 Not Reviewed
**Halogen-Free
 Status**
Not Reviewed

China RoHS



**Need more information on product
 environmental compliance?**

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of
 Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
 non-product compliance questions.

Search Parts in this Series

[19099Series](#)

Application Tooling | [FAQ](#)

*Tooling specifications and manuals are
 found by selecting the products below.
 Crimp Height Specifications are then
 contained in the Application Tooling
 Specification document.*

Global


Description	Product #
Crimp Dies for MTA-100 Tape Applicator used in 3BF Press, MTA-105 Tape Applicator used in TM-2000™ Press, and ATP-301 Air Crimping Press for Mylar Tape Mounted Terminals	0192880123
Mini-Mac™ Applicator	0638850400

This document was generated on 03/18/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

NOTES:

- ① MAT'L: COPPER, STOCK TKN .031^{±.001}
PLATING: ELECTRO-TIN (.0003 MIN)
- ② INSULATION: MOLDED PVC (BLUE)
- ③ "UL" LISTING #E322HH
"CSA" LISTING 18689

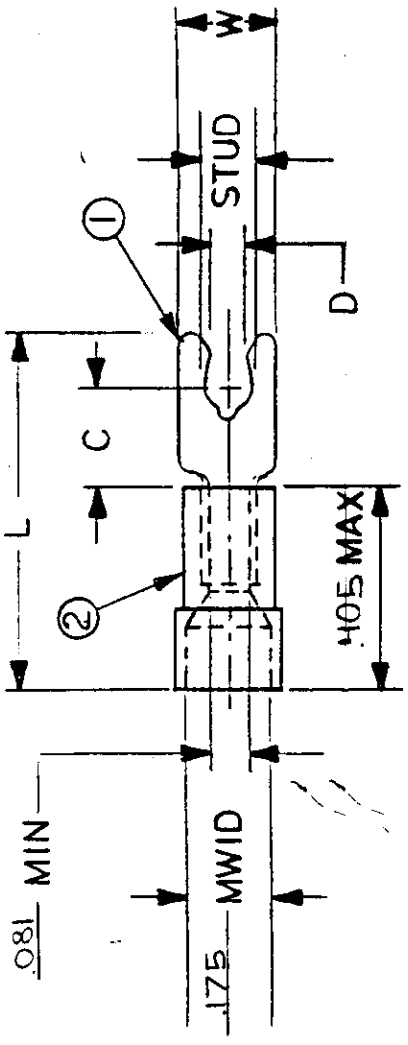

WIRE SIZE: 16-14 AWG.
1.0-2.5 MM²

MWID = MAX. WIRE INSULATION DIA.

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	"D" ±.005	AVAILABLE STUD SIZES	REFERENCE			TITLE:
						SCALE:	NTS	DATE	
BB-2716-	.310	.261	.871	.139	08X (.173 ^{±.005})	DRWN. BY: GZ		4.5.85	SNAP SPADE SHORT TONGUE TERMINAL.
BB-2717-	.330	.261	.919	.156	10X (.198 ^{±.005})	CHKD. BY:			TONGUE TERMINAL.
						APPRD. BY:			INSULKRIMP SERIES
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED						EICmolex INCORPORATED			
FRAC.	DEC.	ANG.							
±	±	±							
									DWG. NO. A CUSTOMER DWG.