


## SILICON HIGH VOLTAGE RECTIFIER

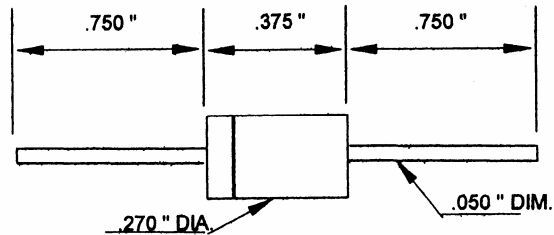

PART NUMBER	PIV VOLTS	$I_O$ AMPS @ 50° C	$V_f$ @ $I_O$ @ 25° C	$I_r$ @ PIV @ 25° C	MAX SINGLE CYCLE SURGE CURRENT
B656-15	1500	1.5	3	10 uA	40 AMPS
B656-20	2000	1.5	3	10 uA	40 AMPS
B656-30	3000	1.3	4	10 uA	40 AMPS
B656-40	4000	1.1	5	10 uA	40 AMPS
B656-50	5000	.95	6	10 uA	40 AMPS
B656-60	6000	.60	7	10 uA	40 AMPS
B656-70	7000	.48	8	10 uA	40 AMPS
B656-80	8000	.45	9	10 uA	40 AMPS
B656-90	9000	.40	10	10 uA	40 AMPS
B656-100	10000	.35	11	10 uA	40 AMPS

SUFFIX "A" REPRESENTS AVALANCHE CHARACTERISTICS

EX: B656-100A

(203) 467-2591 TEL

(203) 469-5928 FAX

Email: Info@ edal.com

Internet: <http://www.edal.com>

***EDAL*** industries, inc.

51 Commerce St. East Haven, CT 06512