


EPR1624SE

- Per ITU-T/G.703
- Designed for STM-1 Applications to support 155.52 Mbps
- Operating Temperature : -40°C to +85°C
- 1500 Vrms Isolation


Electrical Parameters @ 25°C

Primary Inductance (μ H Min.)	Leakage Inductance (μ H Max.)	Interwinding Capacitance (pF Max.)	DCR (Ω Max.)
@ 100 KHz, 0.02 Vrms	@ 1 MHz, 0.1 Vrms	@ 1 MHz, 0.1 Vrms	
42 (Pins 1-3)	0.1	6	0.25

Schematic



Package

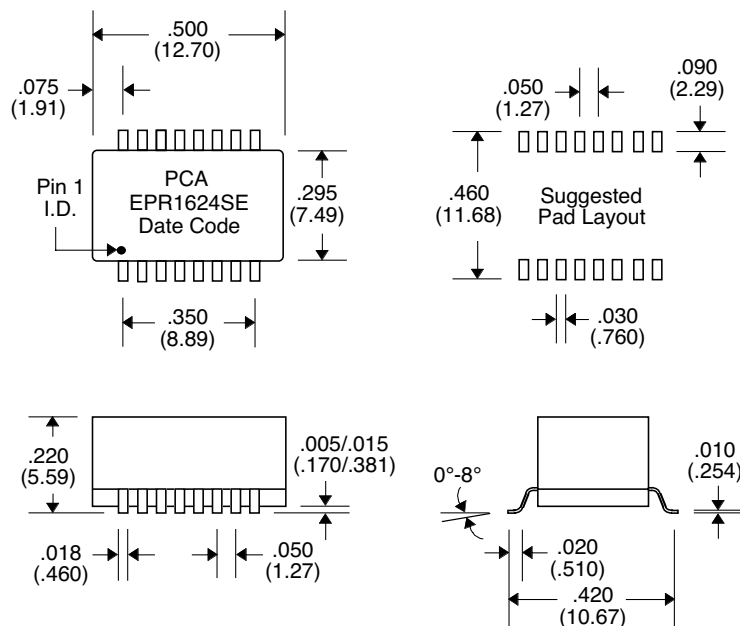

Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$