


# Low & Medium Power Common Mode Inductors




Horizontal Package Style  
500 V<sub>RMS</sub> Isolation



Electrical Specifications at 25°C

Part Number	L <sup>1</sup> ±25% (mH)	I <sup>2</sup> DC (Amps)	DCR Max (mΩ)	WEIGHT approx. g
L-11600	47	0.3	1750	9
L-11601	39	0.5	810	9
L-11602	27	0.8	500	9
L-11603	15	1.0	375	9
L-11604	10	1.2	200	9
L-11605	6.8	1.5	130	9
L-11606	4.2	2.0	102	9
L-11607	3.3	2.5	72	9
L-11608	2.0	3.0	55	9
L-11609	1.5	4.0	35	9

1. Test Frequency 10 kHz - 100 mV
2. 40°C Temperature Rise

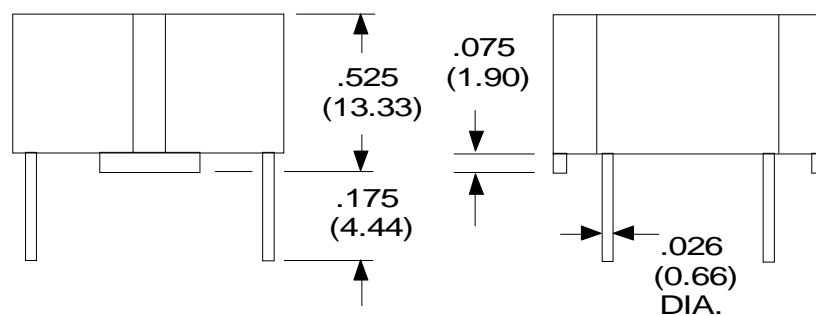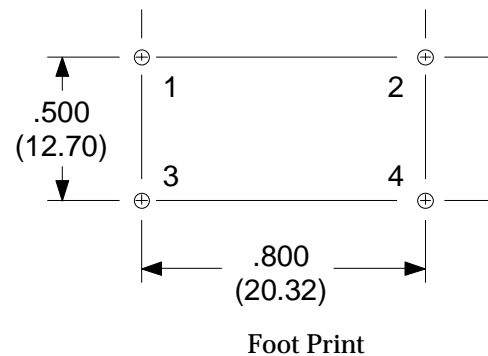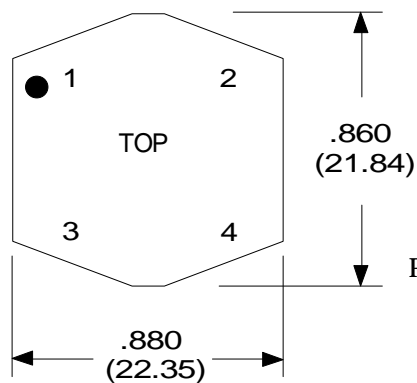

10/18/00

HLP-CMC