


Surface Mount Self-Leaded Inductor

Electrical Specifications at 25°C. Operating Temp. Range: -30°C to +130°C



Part Number	Nominal Inductance (μH)	Rated Current (Amps DC)	Max ⁽¹⁾ E.Top (V-μs)	Nominal DCR (Ω)
L-15367	24	2.74	16.5	0.07

1. E.Top rated at 150 kHz except where designated

Schematic Diagram



Physical Dimensions
inches (mm)

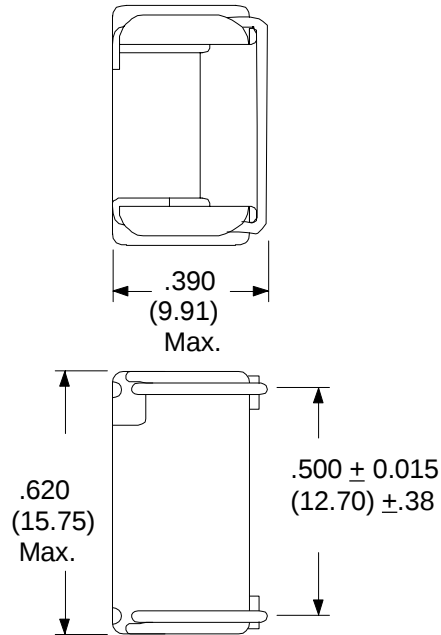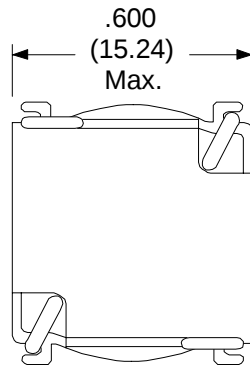

RHOMBUS P/N: L-15367

CUST P/N:

NAME:

DATE: 8/30/99

SHEET: 1 OF 1