


T1/CEPT/ISDN-PRI Pulse Transformer

Reinforced Insulation Per EN 41003/EN 60950

Turns Ratio* ($\pm 5\%$)	1CT:1.41CT
----------------------------	------------

Parameter	Min.	Max.	Units
Open Circuit Inductance* Oscillation Voltage = 20mV Oscillation Frequency = 100.0 KHz	1.2		mH
Leakage Inductance Oscillation Level = 20mV Oscillation Frequency = 100.0 KHz		0.80	μ H
Interwinding Capacitance (C_{WW}) Oscillation Frequency = 100.0 KHz		20	pF
Primary DC Resistance		0.6	ohms
Secondary DC Resistance		0.8	ohms
Isolation (HI-POT)	3000		V_{RMS}

Schematic Diagram




*Turns ratio is Primary to Secondary. Primary Pins 10-6 center tap pin 5 to Secondary pins 1-5 center tap pin 3

¹Tested on Primary Pins 10-6

Flammability: Materials used in the production of these units are UL94-VO and meet requirements of IEC 695-2-2 needle flame test.

Physical Dimensions
inches (mm)

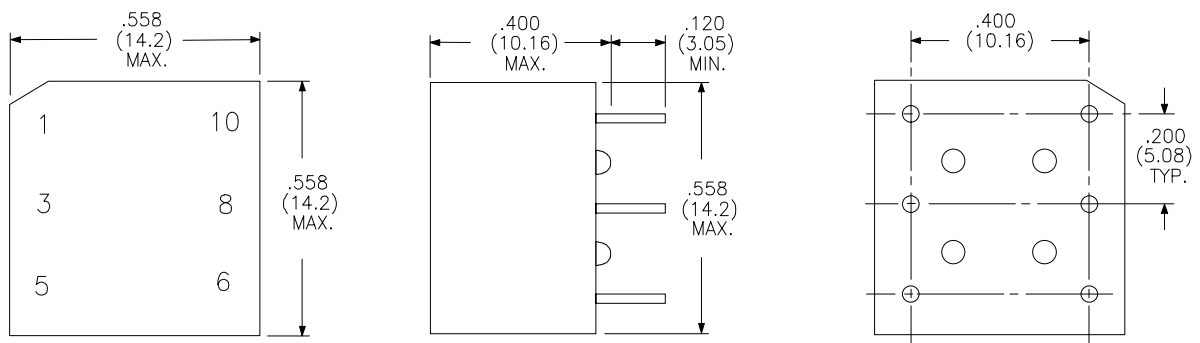

RHOMBUS P/N: T-13637

CUST P/N:

NAME:

DATE: 07/02/98

SHEET: 1 OF 1