



SPECIFICATION

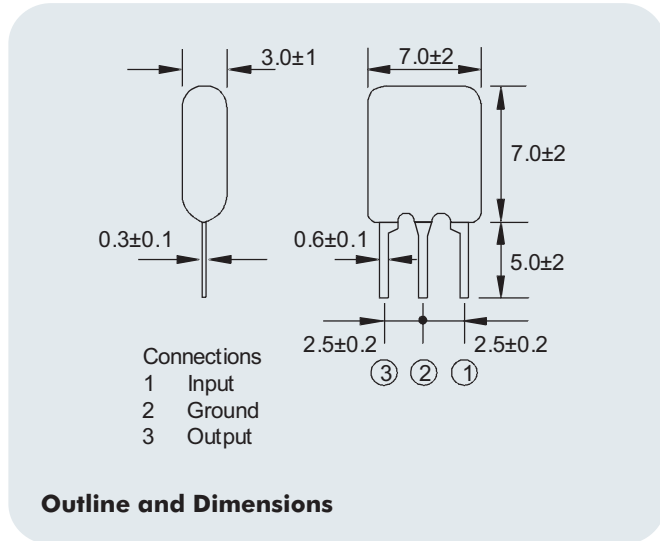

Frequency characteristics

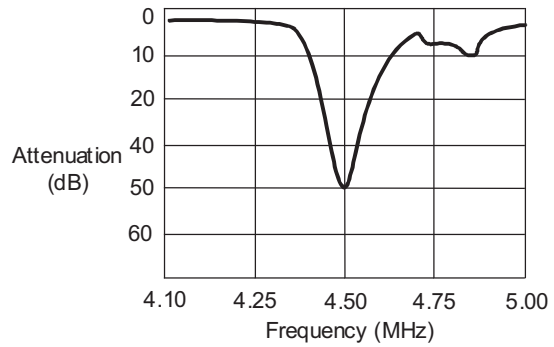

ELECTRICAL CHARACTERISTICS

Part Number	Trap attenuation (at nominal carrier frequency) (dB0 min.)	20dB Bandwidth (kHz) min.	30dB Bandwidth (kHz) min.
XT4.5MB	35(45)	-	50(80)
XT5.5MB	35(45)	-	50(80)
XT6.0MB	35(45))	-	70(120)
XT6.5MB	35(45)	-	70(120)

() = typical values

TEST CIRCUIT

