

Coaxial Power Splitter/Combiner

ZSC-2375+ ZSC-2375

2 Way-0° 75Ω 55 to 85 MHz




Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.

Coaxial Connections

SUM PORT	2
PORT 1	1
PORT 2	3

Outline Drawing

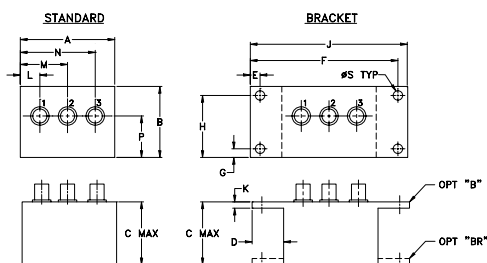

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
2.25	1.38	1.24	.50	.150	3.100	.138	1.238
57.15	35.05	31.50	12.70	3.81	78.74	3.51	31.45

J	K	L	M	N	P	S	wt
3.25	.10	.40	1.15	1.86	.64	.150	grams
82.55	2.54	10.16	29.21	47.24	16.26	3.81	74.0

Features

- low insertion loss, 0.15 dB typ.
- high isolation, 35 dB typ.
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 0.2 deg. typ.
- rugged shielded case

Applications

- VHF
- radio communications
- instrumentation

CASE STYLE: M22

Connectors	Model	Price	Qty.
BNC	ZSC-2375	\$52.95	(1-9)
BRACKET (OPTION "B")		\$5.00	(1+)
BRACKET (OPTION "BR")		\$1.50	(1+)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)




The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 3.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
	Typ.	Min	Typ.	Max.	Max.	Max.
f _c -f _u						
55-85	35	25	0.3	0.5	1	0.1

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
55.00	3.12	3.12	0.00	33.93	0.13	1.34	1.09	1.10
56.00	3.13	3.11	0.01	33.80	0.04	1.34	1.09	1.10
57.50	3.13	3.12	0.01	33.59	0.06	1.34	1.09	1.10
59.00	3.12	3.11	0.01	33.38	0.05	1.34	1.10	1.10
60.50	3.11	3.12	0.01	33.13	0.08	1.34	1.10	1.10
62.00	3.12	3.11	0.01	32.92	0.00	1.34	1.10	1.10
63.50	3.12	3.12	0.00	32.70	0.01	1.34	1.10	1.10
65.00	3.13	3.14	0.01	32.57	0.02	1.34	1.10	1.10
67.00	3.15	3.13	0.02	32.31	0.01	1.34	1.10	1.11
69.00	3.13	3.12	0.01	32.07	0.09	1.34	1.10	1.11
71.00	3.14	3.13	0.00	31.88	0.11	1.34	1.10	1.11
73.00	3.11	3.14	0.02	31.58	0.04	1.34	1.10	1.11
77.00	3.14	3.14	0.00	31.16	0.03	1.34	1.11	1.11
81.00	3.13	3.13	0.01	30.76	0.05	1.35	1.11	1.12
85.00	3.14	3.11	0.02	30.29	0.04	1.35	1.11	1.12

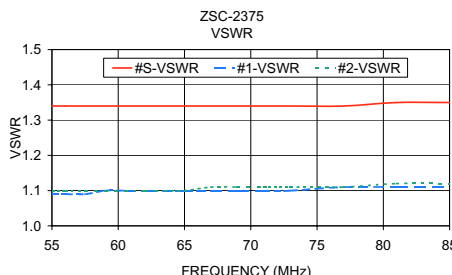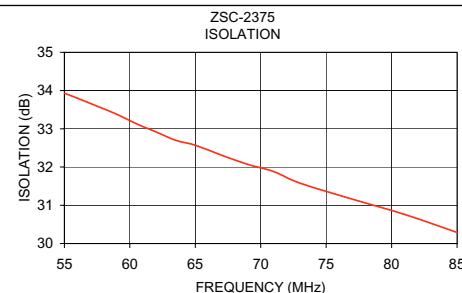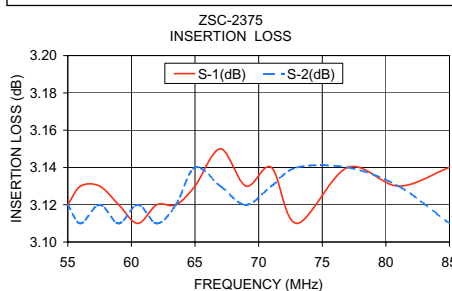

electrical schematic



Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

REV. A
M98898
ZSC-2375
HY/TD/CP
070319

RF/IF MICROWAVE COMPONENTS