

## Silicon PNP Power Transistors

## 2N6029 2N6030

## DESCRIPTION

- With TO-3 package
- Complement to type 2N5629 2N5630

## APPLICATIONS

- For high voltage and high power amplifier applications

## PINNING

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

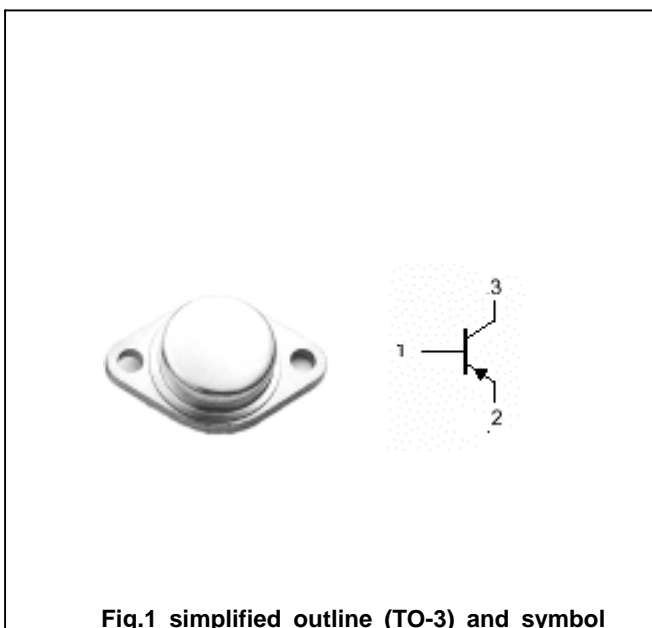


Fig.1 simplified outline (TO-3) and symbol

Absolute maximum ratings( $T_a =$ )

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$V_{CBO}$	Collector-base voltage	2N6029	100	V
		2N6030	120	
$V_{CEO}$	Collector-emitter voltage	2N6029	100	V
		2N6030	120	
$V_{EBO}$	Emitter-base voltage	Open collector	7	V
$I_C$	Collector current		16	A
$I_{CM}$	Collector current-peak		20	A
$I_B$	Base current		5.0	A
$P_D$	Total Power Dissipation	$T_C=25$	200	W
$T_j$	Junction temperature		150	
$T_{stg}$	Storage temperature		-65~200	

## THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	VALUE	UNIT
$R_{th\ j-c}$	Thermal resistance junction to case	0.875	/W

## Silicon PNP Power Transistors

## 2N6029 2N6030

## CHARACTERISTICS

T<sub>j</sub>=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT	
V <sub>CE0(sus)</sub>	Collector-emitter sustaining voltage	2N6029	I <sub>C</sub> =0.2A ; I <sub>B</sub> =0	100			V
		2N6030		120			
V <sub>CEsat-1</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =10A; I <sub>B</sub> =1A			1.0	V	
V <sub>CEsat-2</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =16A ; I <sub>B</sub> =4A			2.0	V	
V <sub>BEsat</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =10A; I <sub>B</sub> =1A			1.8	V	
V <sub>BE</sub>	Base-emitter on voltage	I <sub>C</sub> =8A ; V <sub>CE</sub> =2V			1.5	V	
I <sub>CBO</sub>	Collector cut-off current	V <sub>CB</sub> =ratedV <sub>CB0</sub> ; I <sub>E</sub> =0			1.0	mA	
I <sub>CEO</sub>	Collector cut-off current	2N6029			1.0	mA	
		2N6030					V <sub>CE</sub> =60V; I <sub>B</sub> =0
I <sub>CEV</sub>	Collector cut-off current (V <sub>BE(off)</sub> =1.5V)	V <sub>CE</sub> =ratedV <sub>CB</sub>			1.0	mA	
		V <sub>CE</sub> =ratedV <sub>CB</sub> ; T <sub>C</sub> =150			5.0		
I <sub>EBO</sub>	Emitter cut-off current	V <sub>EB</sub> =7V; I <sub>C</sub> =0			1.0	mA	
h <sub>FE-1</sub>	DC current gain	2N6029	I <sub>C</sub> =8A ; V <sub>CE</sub> =2V	25		100	
		2N6030		20	80		
h <sub>FE-2</sub>	DC current gain	I <sub>C</sub> =16A ; V <sub>CE</sub> =2V	4				
C <sub>OB</sub>	Output capacitance	I <sub>E</sub> =0 ; V <sub>CB</sub> =10V ; f=0.1MHz			1000	pF	
f <sub>T</sub>	Transition frequency	I <sub>C</sub> =1A ; V <sub>CE</sub> =20V	1.0			MHz	

Silicon PNP Power Transistors

2N6029 2N6030

PACKAGE OUTLINE

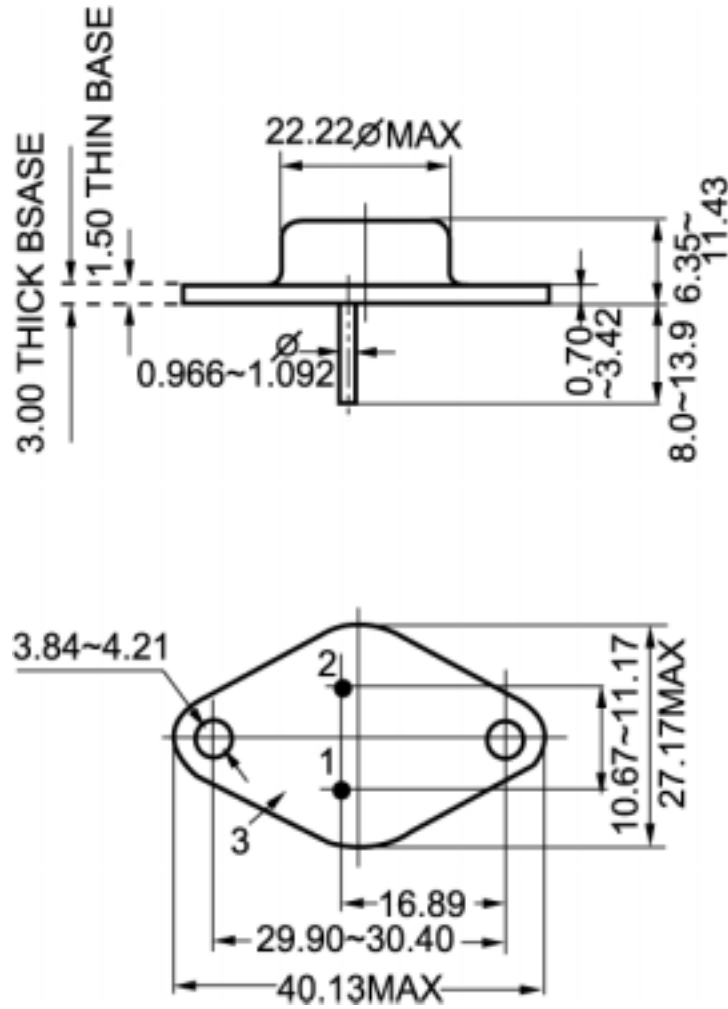


Fig.2 outline dimensions (unindicated tolerance: ± 0.10mm)