


PANDUIT PART NUMBER	WIRE SIZE	DIMENSIONS in.			
		A ±.03	B DIA. ±.01	C DIA. ±.01	D ±.03
BSN22	26-22	.79 (20.1)	.08 (2.0)	.04 (1.0)	.47 (1.2)



NOTES:

- RATED FOR:
 - #26-22 AWG SOLID OR STRANDED COPPER WIRE
 - 221° F (105° C) MAX. TEMP. RATING
- MATERIAL:
 - .02 (0.5) THK COPPER, TIN PLATED
 - HOUSING - NYLON, YELLOW
- PACKAGE QTY: STD. PKG.-C=100
BULK PKG.-M=1000
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- INSTALLATION TOOLS: CT-520
- WIRE STRIP LENGTH: $1/4^{+1/32}_0$

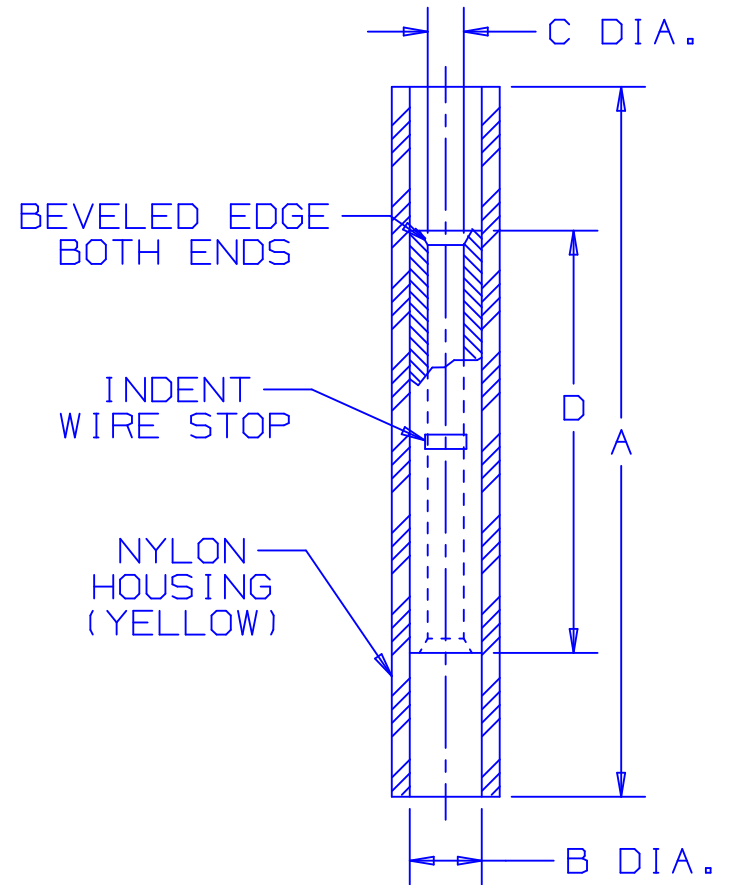

A41337_04

REV	DATE	BY	CHK	DESCRIPTION	ECN #
04	10/05	RT	LA	REMOVED UL & CSA NOTE	TR00036
03	1/01	RM		FILESPEC WAS N41337AA_PCD_02	
02	7/95	MC		UPDATED NOTES AND DIMENSIONS	03438

PANDUIT CORP.

TINLEY PARK, ILLINOIS

#26-22 BARREL NYLON INSULATED BUTT SPLICE

DRAWN BY
DAW

CHK'D

SCALE
N/A

DRAWING NO.
A41337