
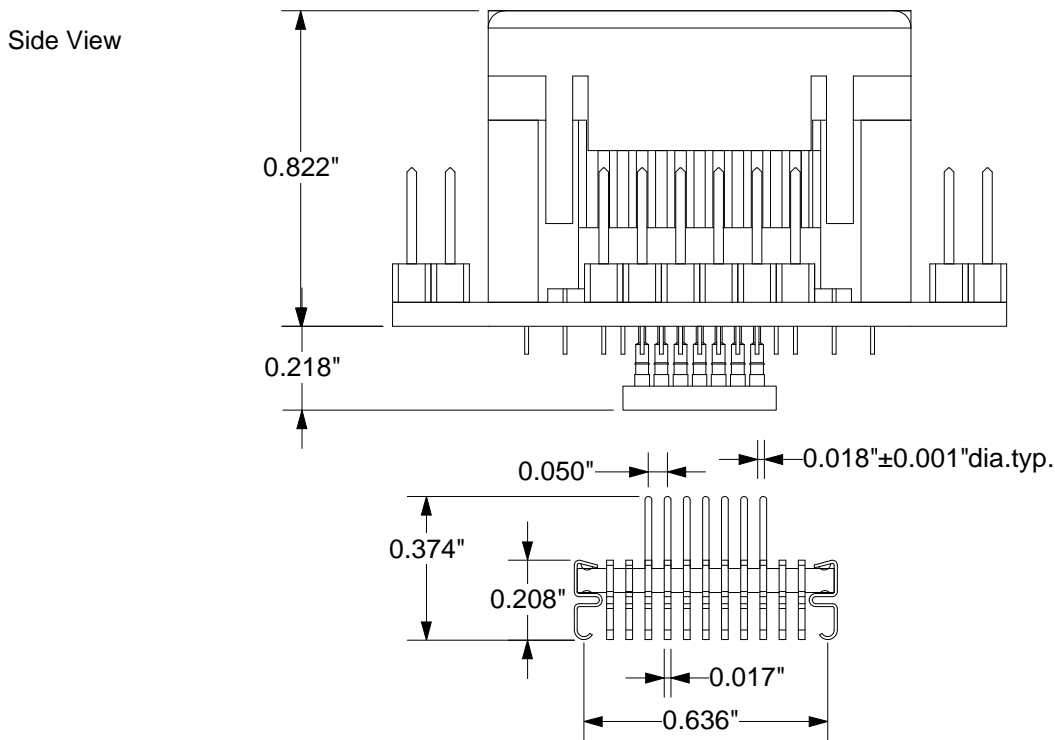



Carrier adaptor; 2 piece pluggable adaptor, PLCC ZIF socket with test probes to surface mountable PLCC emulator foot.

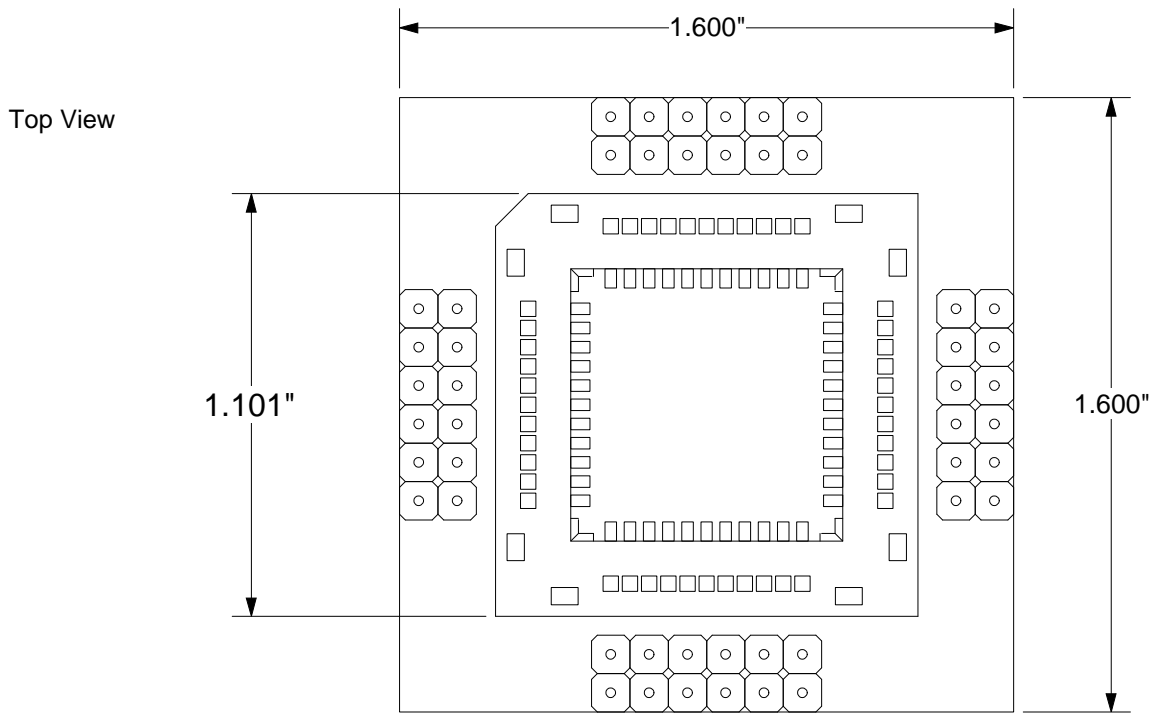

Substrate: FR4/G10, 0.0625"±0.007" thick.

PLCC Socket Pins: Phosphor Bronze, finish: 150 μ" Tin/lead (93/7) over 40μ" Nickel

<b>CA-PLCC044-Z-J-T-01</b>	Status: Released	Scale: 2:1	Rev: D
 <p>© 1994 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com</p>	Drawing: M Lund		Date: 8/17/94
	File: CA-PLCC044-Z-J-T-01 Dwg		ECO#