

HR303.875

303.875MHz One-Port SAW Resonator



| |
|--------------|
| Approved by: |
| Checked by: |
| Issued by: |

SPECIFICATION


PRODUCT: SAW RESONATOR

MODEL: HR303.875 TO-39

HOPE MICROELECTRONICS CO.,LIMITED

The 303.875 is a true one-port, surface-acoustic-wave (SAW) resonator in a low-profile metal TO-39 case. It provides reliable, fundamental-mode, quartz frequency stabilization i.e. in transmitters or local oscillators operating at 303.875 MHz.

1.Package Dimension (TO-39)

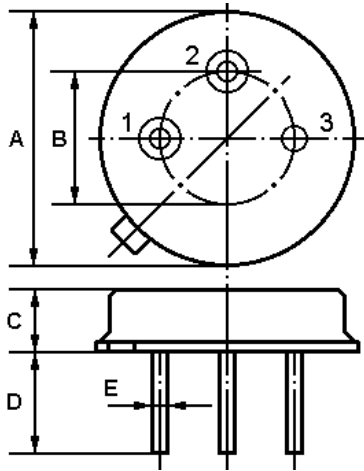

| Pin | Configuration |
|-----|----------------|
| 1 | Input / Output |
| 2 | Output / Input |
| 3 | Case Ground |


| Dimension | Data (unit: mm) |
|-----------|-----------------|
| A | 9.30±0.20 |
| B | 5.08±0.10 |
| C | 3.40±0.20 |
| D | 3±0.20 / 5±0.20 |
| E | 0.45±0.20 |

2.Marking

303.875


Color: Black or Blue

3.Equivalent LC Model and Test Circuit

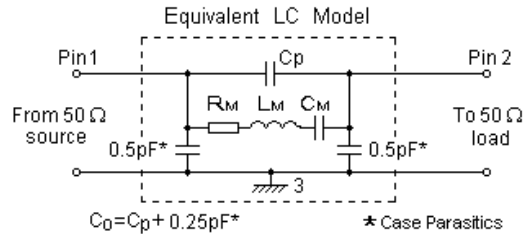


4.Typical Application Circuits


1) Low-Power Transmitter Application

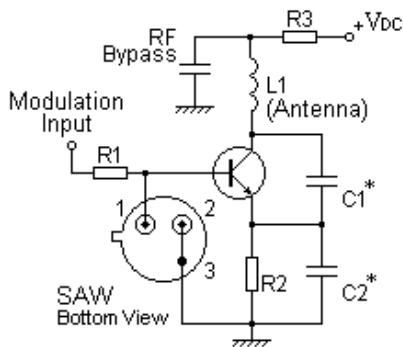


2) Local Oscillator Application

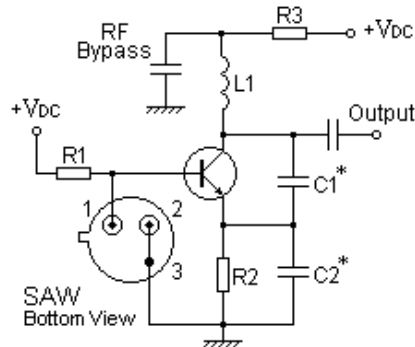

5.Typical Frequency Response

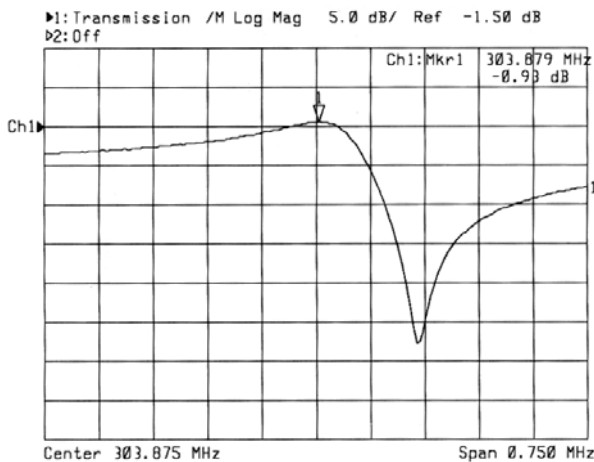

6.Temperature Characteristics

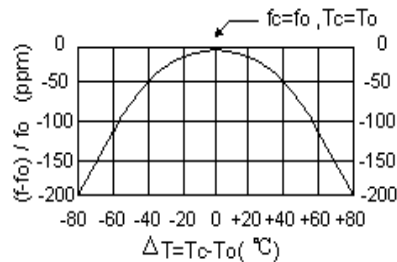

The curve shown above accounts for resonator contribution only and does not include oscillator temperature characteristics.

7.Performance

7-1.Maximum Ratings

| Rating | Value | Unit |
|--|------------|------|
| CW RF Power Dissipation P | 0 | dBm |
| DC Voltage Between Any two Pins V_{DC} | ± 30 | V |
| Storage Temperature Range T_{stg} | -40 to +85 | |
| Operating Temperature Range T_A | -10 to +60 | |

7-2.Electronic Characteristics

| Characteristic | | Sym | Minimum | Typical | Maximum | Unit |
|---|--------------------------------------|--------------|---------|----------|---------|---------------------|
| Center Frequency (+25 °C) | Absolute Frequency | f_C | 303.800 | | 303.950 | MHz |
| | Tolerance from 303.875 MHz | Δf_C | | ± 75 | | kHz |
| Insertion Loss | | IL | | 1.5 | 2.0 | dB |
| Quality Factor | Unloaded Q | Q_U | | 12,500 | | |
| | 50 Ω Loaded Q | Q_L | | 2,000 | | |
| Temperature Stability | Turnover Temperature | T_0 | 25 | | 55 | |
| | Turnover Frequency | f_0 | | f_C | | kHz |
| | Frequency Temperature Coefficient | FTC | | 0.032 | | ppm/°C ² |
| Frequency Aging | Absolute Value during the First Year | $ f_A $ | | 10 | | ppm/yr |
| DC Insulation Resistance Between Any Two Pins | | | 1.0 | | | M Ω |
| RF Equivalent RLC Model | Motional Resistance | R_M | | 19 | 26 | Ω |
| | Motional Inductance | L_M | | 124.7160 | | μ H |
| | Motional Capacitance | C_M | | 2.2018 | | fF |
| | Pin 1 to Pin 2 Static Capacitance | C_0 | 2.25 | 2.55 | 2.85 | pF |

ⓘ CAUTION: Electrostatic Sensitive Device. Observe precautions for handling!

C 2003. All Rights Reserved.

- The center frequency, f_C , is measured at the minimum IL point with the resonator in the 50 Ω test system.
- Unless noted otherwise, case temperature $T_C = +25^\circ\text{C} \pm 2^\circ\text{C}$.
- Frequency aging is the change in f_C with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing in subsequent years.
- Turnover temperature, T_0 , is the temperature of maximum (or turnover) frequency, f_0 . The nominal frequency at any case temperature, T_C , may be calculated from: $f = f_0 [1 - \text{FTC} (T_0 - T_C)^2]$.
- This equivalent RLC model approximates resonator performance near the resonant frequency and is provided for reference only. The capacitance C_0 is the measured static (nonmotional) capacitance between Pin1 and Pin2. The measurement includes case parasitic capacitance.
- Derived mathematically from one or more of the following directly measured parameters: f_C , IL, 3 dB bandwidth, f_C versus T_C , and C_0 .
- The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
- Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
- Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
- For questions on technology, prices and delivery, please contact our sales offices or e-mail sales@hoperf.com.