
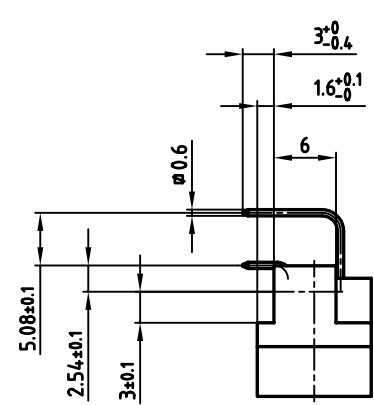
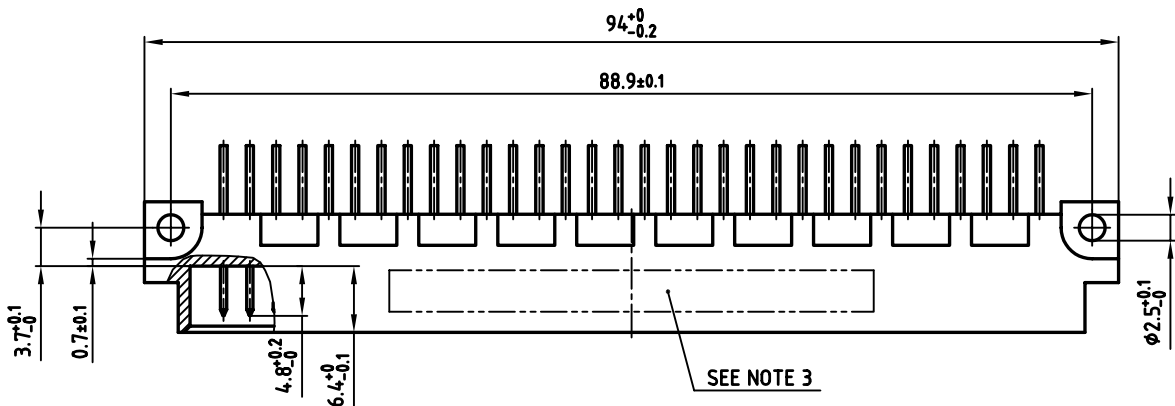


used for: DIN EN 60603 TYPE "C"

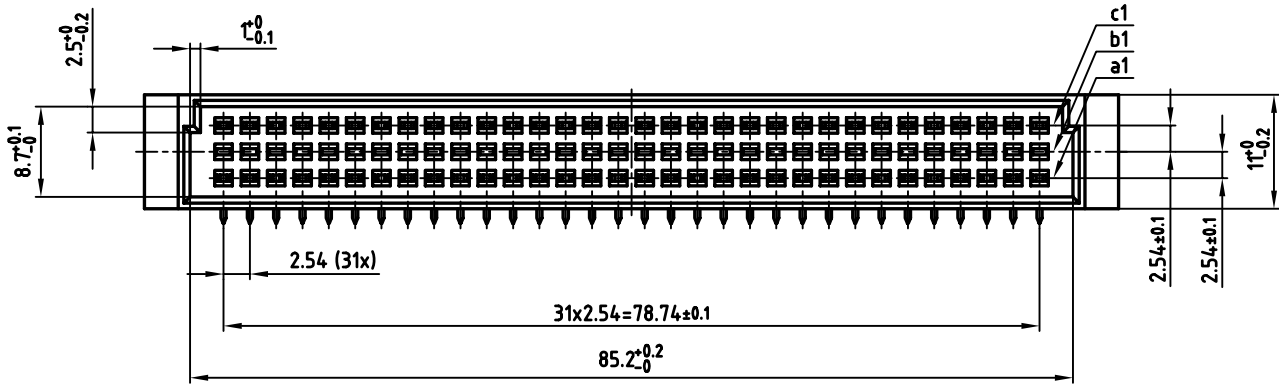


Directive 2002/95/EC
RoHS
Compliant

NOTES:

1. INSULATORS: PBTP GF UL 94 V-0, GREY
2. CONTACTS: COPPER ALLOY
PLATING: GOLD OVER NICKEL
50 MATING CYCLES
3. CONNECTOR IS PART MARKED: 121A10139X CONEC ABC

P.C.B. HOLE DRILLINGS

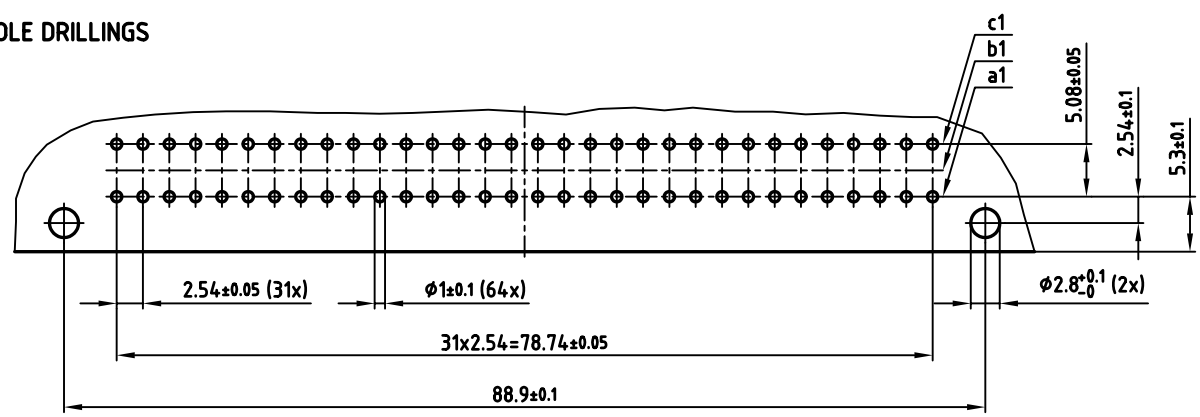

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC Gmbh DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance		dim. in mm	
2006	date	name	
drawn	08.02.	Lehmenkühler	
appd.	08.02.	Mickenbecker	
norm	DIN EN 60603		
d-old			

scale: 2:1

material: SEE NOTES

title: MALE CONNECTOR TYPE "C"
64pos. angled

dwg no: AutoCAD 2004 DIN-A 3

12K1A420 sh:1/1

part no: 121A10139X

