

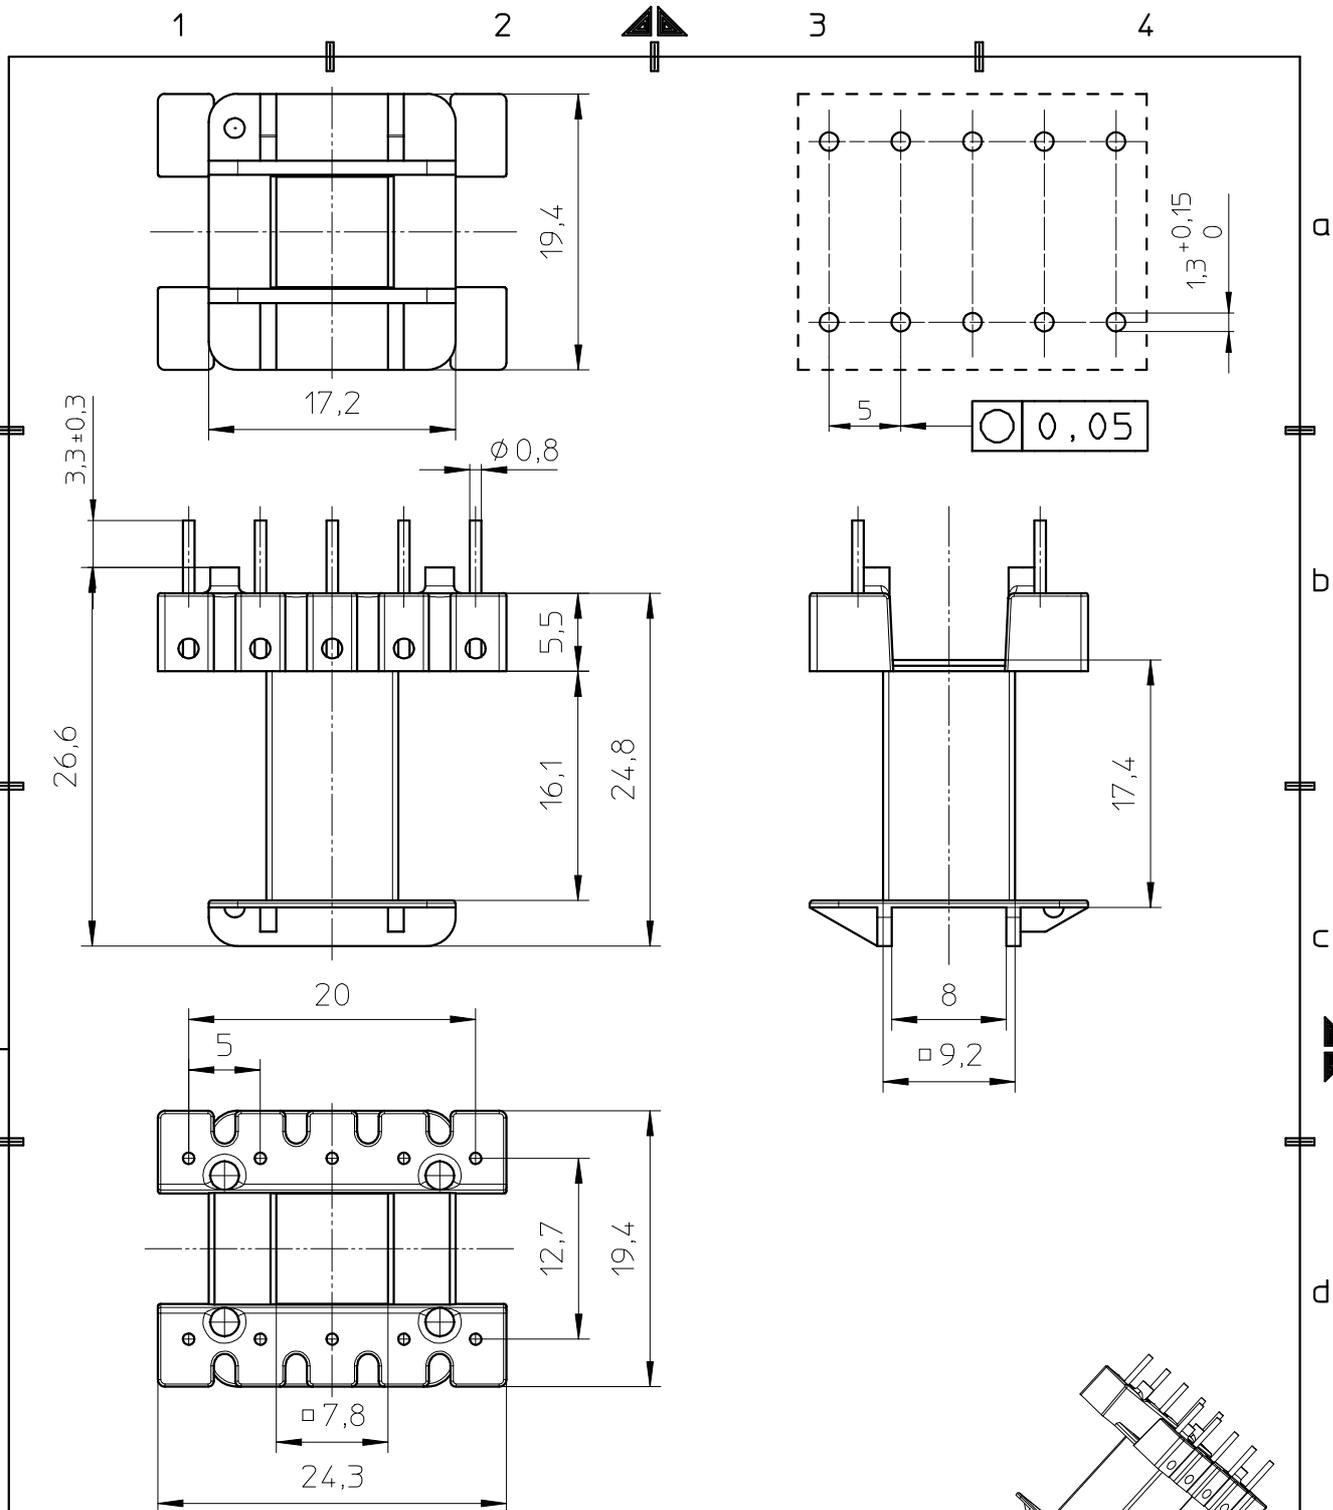



FERROXCUBE



Coil former material: Rynite FR530 (PET), glass-reinforced.
 UL file number: E69578 - UL94V-0.
 Pin material: Copperclad steel - Ni flash, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class F, 155°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s
 Min. winding area: 64 mm.²
 Mean length of turn: 52,8 mm.

CLASS.NO.		CPV-E25/13/7-1S-10P-Z		4322 021 06421		1 03-05-2005	
NAME NAAM	M.Veekens	SUPERS. VERV.	1	SH BL.	112	-	001 010
MPA	CHECK CONTR.	DAT.	03-05-2005	Property of Eigendom van		© FERROXCUBE 2000	
						A4	