


Dual Directional Coupler

P/N: JXWBSO-T-1000-3100-31-300

| | |
|-----------------------------|---|
| Frequency Range(GHz) | 1.0-3.1 |
| Insertion Loss(dB) | 0.7 max The academic value is included in it |
| Coupling(dB) | 31±1 |
| VSWR | 1.4 max |
| Isolation(dB) | 40 min |
| Power(W) | 300 |
| Input and Output Connectors | N-Female |
| FWD and REV Connector | SMA-Female |
| Operating Temperature(°C) | -40 ~ +70 |
| Storage Temperature(°C) | -55 ~ +85 |
| Net Weight(Kg) | 0.35 Around |

Outline Drawing (Size: mm)

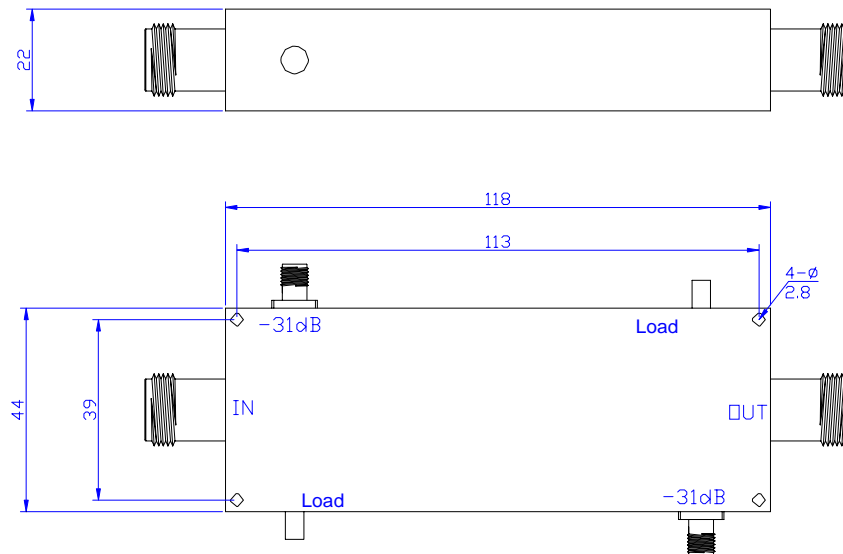

For current data sheets, please contact: sales@aacix.com