


## Clipped Sinewave 3.2 x 2.5 x 1.3mm SMD

- Ultra-miniature SMD package 3.2 x 2.5 x 1.3mm
- Stability from  $\pm 1$ ppm over  $-30^{\circ}$  to  $+75^{\circ}\text{C}$
- Supply Voltage from 2.3 Volts to 5.5 Volts
- Produced as TCXO or VCTCXO with EFC
- Readily customized



### DESCRIPTION

EM32 series TCXOs are ceramic SMD TCXOs packaged in an industry-standard, ultra-miniature 3.2 x 2.5mm package. This TCXO can be run from a supply voltage of 2.3 to 5.5 Volts. Close tolerances from  $\pm 1$ ppm over  $-30^{\circ}$  to  $+75^{\circ}\text{C}$  are available. The part can be produced as either a standard TCXO or a voltage-controlled TCXO (VCTCXO).

### SPECIFICATION

Product Series Code	TCXO: EM32S VCTCXO: VEM32S
Frequency Range:	16.0MHz to 40.0MHz*
Output Waveform:	Clipped Sinewave
Initial Calibration Tolerance**:	$< \pm 1$ ppm at $25^{\circ}\text{C}$
Standard Frequencies:	10.0, 12.80, 13.0, 14.40, 15.36, 16.384, 19.2, 19.440, and 19.68MHz (Partial list)
Operating Temperature Range:	See table
Frequency Stability	
vs. Ageing:	$\pm 1.0$ ppm max. first year
vs. Voltage Change:	$\pm 0.3$ ppm max. $\pm 5\%$ change
vs. Load Change:	$\pm 0.3$ ppm max. $\pm 10\%$ change
vs. Reflow:	$\pm 1$ ppm max. for one reflow (Measured after 24 hours)
Supply Voltage:	+2.8, +3.0 or +5.0Volts (Specify when ordering)
Output Voltage Level:	0.8V p-p minimum
Start-up Time:	2ms typical, 5ms max.
Current Consumption:	See table below
Output Load:	10kOhm//10pF $\pm 10\%$
Harmonic Distortion:	-10dB typical, -7dB max.
SSB Phase Noise:	See table
Output Format:	DC block, AC coupled
Storage Temperature:	$-50^{\circ}$ to $+100^{\circ}\text{C}$

\* Note: The frequency range between 26MHz to 40MHz is only available for 2.8 Volt and 3.0 Volt supply voltages.

\*\* Stability over temperature is measured from this initial frequency.

### FREQUENCY STABILITY


Frequency Stability (ppm)		$\pm 0.5$	$\pm 1.0$	$\pm 1.5$	$\pm 2.0$	$\pm 2.5$
Temperature Range ( $^{\circ}\text{C}$ )	0 ~ +50	ASK	✓	✓	✓	✓
	-10 ~ +60	x	✓	✓	✓	✓
	-20 ~ +70	x	x	✓	✓	✓
	-30 ~ +75	x	x	x	✓	✓
	-40 ~ +85	x	x	x	x	✓

✓ = available, x = not available, ASK = call Technical Sales

### CURRENT CONSUMPTION

Supply Voltage		Max Current
Frequency Range	9.6 to 15MHz	1.5mA
	15.01 to 26MHz	2.0mA
	26.01 to 40MHz	2.5mA

### EM32S - OUTLINES AND DIMENSIONS

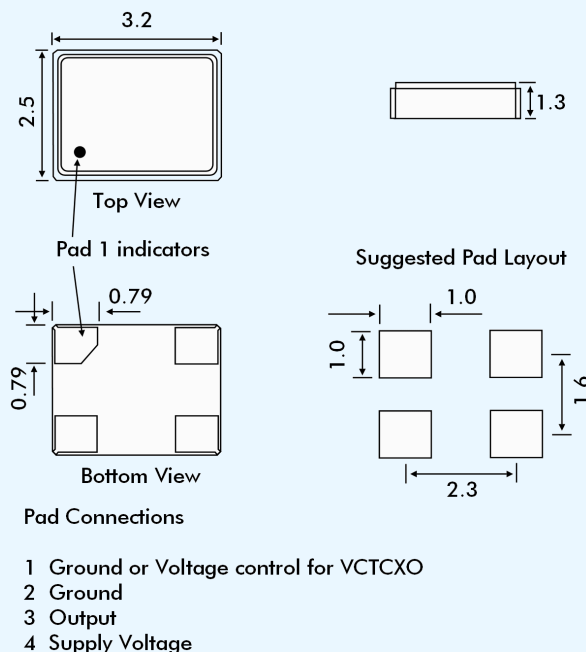

### VEM32S VOLTAGE CONTROL SPECIFICATION

Control Voltage:	Standard = $+1.5 \pm 1.0$ Volts for all input voltages. (Contact technical sales if $+2.5 \pm 2.0$ Volts is required.)
Frequency Deviation:	$\pm 6.0$ ppm min.
Slope Polarity:	Positive (increase of control voltage increases output frequency.)
Input Impedance:	1.0M $\Omega$ min.
Modulation Bandwidth:	3.0kHz min. measured at -3dB
Linearity:	10% max.

### PHASE NOISE

SSB Phase Noise at $25^{\circ}\text{C}$	Offset (Hz)	10	100	1k	10k	100k
	EM32S 13MHz (dBc/Hz)		-80	-115	-135	-148

### PART NUMBERING PROCEDURE

Example: **EM32S3-40.00-2.5/-30+75**

Series Description: EM32S3  
 TCXO = EM32S  
 VCTCXO = VEM32S

Supply Voltage: 28 = 2.8 VDC  
 3 = 3.0 VDC  
 5 = 5.0 VDC

Frequency (MHz): 40.00  
 Stability over OTR ( $\pm$ ppm): 2.5  
 Operating Temperature Range (OTR) ( $^{\circ}\text{C}$ ): -30+75  
 Lower and upper limits.