



CHENMKO ENTERPRISE CO.,LTD

SURFACE MOUNT

N-Channel Enhancement Mode Field Effect Transistor

VOLTAGE 30 Volts CURRENT 6 Ampere

CHM2316QPT

Lead free devices

APPLICATION

- * Servo motor control.
- * Power MOSFET gate drivers.
- * Other switching applications.

FEATURE

- * Small flat package. (SC-74/SOT-457)
- * High density cell design for extremely low $R_{DS(ON)}$.
- * Rugged and reliable.
- * High saturation current capability.



CONSTRUCTION

- * N-Channel Enhancement



SC-74/SOT-457

CIRCUIT



Dimensions in millimeters

SC-74/SOT-457

Absolute Maximum Ratings

$T_A = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	CHM2316QPT	Units
V_{DSS}	Drain-Source Voltage	30	V
V_{GSS}	Gate-Source Voltage	± 20	V
I_D	Maximum Drain Current - Continuous	6.0	A
	- Pulsed (Note 3)	24	
P_D	Maximum Power Dissipation	2000	mW
T_J	Operating Temperature Range	-55 to 150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$

Note : 1. Surface Mounted on FR4 Board , $t \leq 5\text{sec}$

2. Pulse Test , Pulse width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$

3. Repetitive Rating , Pulse width limited by maximum junction temperature

4. Guaranteed by design , not subject to production testing

Thermal characteristics

$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient (Note 1)	62.5	$^\circ\text{C/W}$
2006-08			

RATING CHARACTERISTIC CURVES (CHM2316QPT)

Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
--------	-----------	------------	-----	-----	-----	-------

OFF CHARACTERISTICS

BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}} = 0 \text{ V}, I_D = 250 \mu\text{A}$	30			V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{\text{DS}} = 30 \text{ V}, V_{\text{GS}} = 0 \text{ V}$			1	μA
I_{GSSF}	Gate-Body Leakage	$V_{\text{GS}} = 20\text{V}, V_{\text{DS}} = 0 \text{ V}$			+100	nA
I_{GSSR}	Gate-Body Leakage	$V_{\text{GS}} = -20\text{V}, V_{\text{DS}} = 0 \text{ V}$			-100	nA

ON CHARACTERISTICS (Note 2)

$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{DS}} = V_{\text{GS}}, I_D = 250 \mu\text{A}$	1		3	V
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance	$V_{\text{GS}}=10\text{V}, I_D=6.0\text{A}$		27	34	$\text{m}\Omega$
		$V_{\text{GS}}=4.5\text{V}, I_D=4.9\text{A}$		36	50	
g_{FS}	Forward Transconductance	$V_{\text{DS}} = 15\text{V}, I_D = 6.0\text{A}$		8.0		S

SWITCHING CHARACTERISTICS (Note 4)

Q_g	Total Gate Charge	$V_{\text{DS}}=15\text{V}, I_D=6.0\text{A}$ $V_{\text{GS}}=10\text{V}$		12.3	16	nC
Q_{gs}	Gate-Source Charge			1.5		
Q_{gd}	Gate-Drain Charge			2.5		
t_{on}	Turn-On Time	$V_{\text{DD}}= 15\text{V}$ $I_D = 5.5\text{A}, V_{\text{GS}}= 10 \text{ V}$ $R_{\text{GEN}}= 3\Omega$		9	20	nS
t_r	Rise Time			3	8	
t_{off}	Turn-Off Time			24	50	
t_f	Fall Time			4	10	

DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS

I_s	Drain-Source Diode Forward Current	(Note 1)			1.7	A
V_{SD}	Drain-Source Diode Forward Voltage	$I_s = 1.7\text{A}, V_{\text{GS}} = 0 \text{ V}$ (Note 2)			1.2	V

RATING CHARACTERISTIC CURVES (CHM2316QPT)

Typical Electrical Characteristics

Figure 1. Output Characteristics

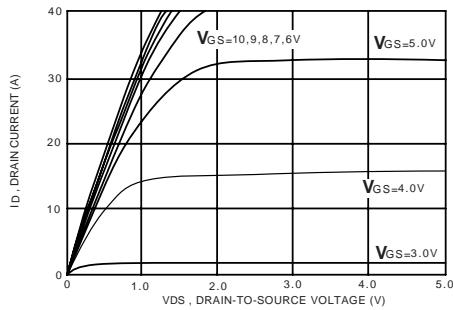


Figure 2. Transfer Characteristics

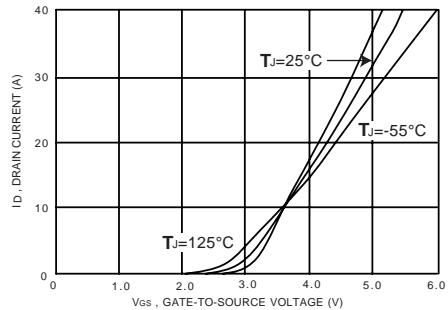


Figure 3. Gate Charge

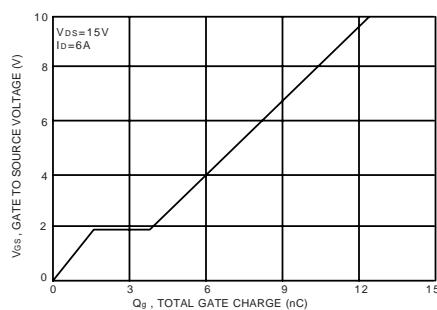


Figure 4. On-Resistance Variation with Temperature

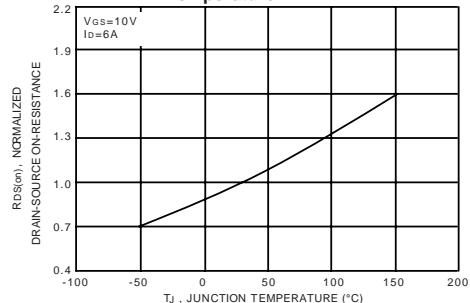


Figure 5. Gate Threshold Variation with Temperature

