



1. Dimensions:

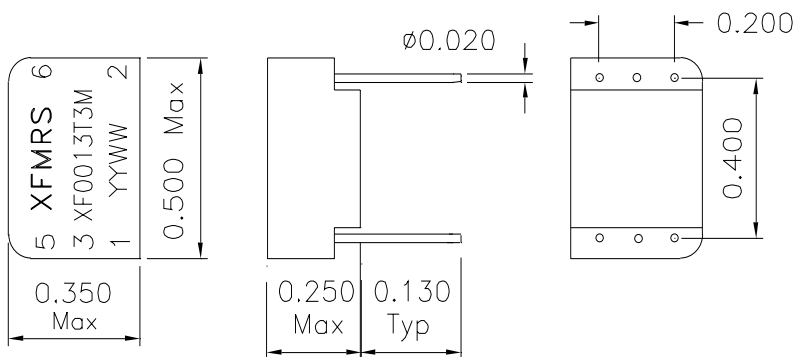

PIN 4 IS REMOVED

2. Schematic:

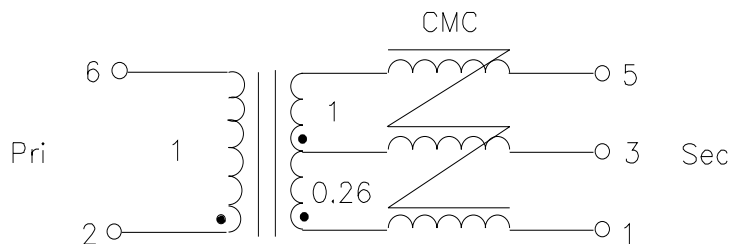

3. Electrical Specifications: @25°C

Primary Pins: Pins 2-6

Isolation Voltage: 1500Vrms

Turns Ratio: (2-6):(1-3):(3-5)=1:0.26:1±5%

PRI OCL: 1.5mH Minimum @100KHz 50mV

PRI LL: 0.40µH Maximum @100KHz 50mV (SEC Shorted)

Cw/w: 40pF Maximum @100KHz 50mV (PRI/SEC)

PRI DCR: 0.70 ohms Maximum (Pins 2-6)

SEC DCR: 1.10 ohms Maximum (Pins 1-5)

CMC OCL: 18µH Minimum @ 100KHz 50mV

DOC. REV A/1

XFMRs Inc		Title: T1/CEPT/ISDN-PRI TRANSFORMERS	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	P/N: XF0013T3M		REV. A
	DWN.	李清儿	Jun-16-97
	CHK.	孙小松	Jun-16-97
SCALE 2:1 SHT 1 OF 1	APP.	Joe Huff	Jun-16-97