



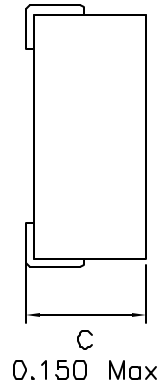


1. Mechanical Dimensions:

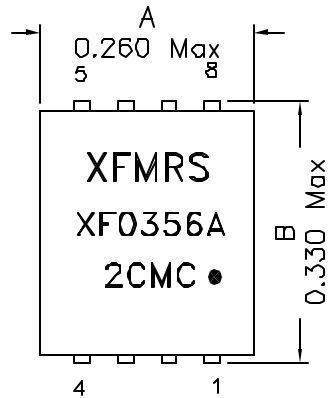


BOTTOM VIEW

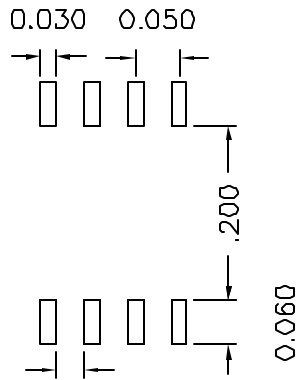

0.020

Mounting Pattern

2. Schematic:



3. Electrical Specifications: @25°C

OCL: 35uH Min @130KHz 0.1V, Each Wdg
 DCR: 0.090 Ohms Max, Each Wdg
 Rated Current: 500mA Max
 HIPOT: 100Vac, Wdg to Wdg @60Hz, 1 Sec

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E15155B
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Moisture Sensitivity: Level 2

DOC. REV A/1

XFMRS Inc.	Title: Surface Mount Tip Ring Filter		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XF0356A-2CMC	REV. A
SHEET 1 OF 1	DWN.	廖玉坤	Sep-07-04
	CHK.	李清儿	Sep-07-04
	APP.	J Ng	Sep-07-04