

Clip, 6.3 x 32 mm



250 VAC

**Description**

- Through hole mounting


References[General Product Information](#)**Weblinks**[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [Distributor-Stock-Check](#), [Accessories](#), [Product Change Notification \(PCN\)](#)**Technical Data**

Fuse-Link	6.3 x 32 mm
Mounting	PCB
Terminal	Solder THT
Rated Voltage	250 VAC
Rated Current	10 A
Degree of Protection	IP 00
Material: Terminals	see variants
Unit Weight (Socket/Cap)	0.9 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	none

Soldering Methods	Wave
Solderability	235 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1
Resistance to Soldering Heat	260 °C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 1A

Abmessungen

8 mm

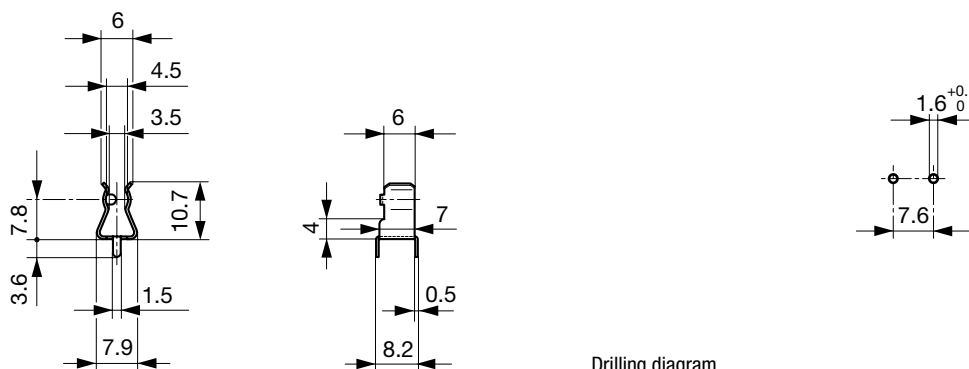

Drilling diagram

Variants

Clip	Terminal	Material: Terminals	Order Number
●	Straight	Tin-Plated Bronze	7181.5003

Packaging Unit Bulk (100 pcs.)