

VKS-8262 Klystron

CPI Microwave Power Products (MPP) offers the VKS-8262 series of klystrons for use in particle accelerators for scientific, medical, and industrial applications. These klystrons provide up to 7.5 MW peak at 2.856 or 2.9985 GHz at various rf pulse lengths and duty. Versions are available with up to 36 kW of average output power at 2.856 GHz and 72 kW at 2.9985 GHz.

FEATURES

- Diode Electron Gun
- Water Cooled
- Electromagnet Focusing
- WR-284 Waveguide Output
- Thousands in Service
- Long Life
- Proven Reliability



VKS-8262 KLYSTRONS AT 2.856 GHz

Product Type	Peak Output Power (MW)	Peak Drive Power	Bandwidth (-3 dB) (MHz)	Peak Beam Voltage* (kV)	Peak Beam Current* (A)	RF Pulse Length (µsec)	Duty
VKS-8262S	5.5	200	5	127	92	5.8	0.00104
VKS-8262J	4.5	200	5	125	92	10	0.00314
VKS-8262M	3	80	5	110	72	10	0.004
VKS-8262F	5	200	4	125	91	16.3	0.0072
VKS-8262P1	5	200	4	125	92	16.3	0.009

VKS-8262 KLYSTRONS AT 2.9985 GHz

Product Type	Peak Output Power (MW)	Peak Drive Power	Bandwidth (-3 dB) (MHz)	Peak Beam Voltage* (kV)	Peak Beam Current* (A)	RF Pulse Length (µsec)	Duty
VKS-8262G	7.5	120	5	160	110	4.5	0.001
VKS-8262E	6	200	5	135	109	5.0	0.001
VKS-8262D	5.5	200	5	130	105	5.8	0.001
VKS-8262HS	3	80	5	110	72	10	0.004
VKS-8262K	5	200	4	125	91	16.3	0.0072
VKS-8262N	5	200	4	125	92	16.3	0.0144


* These are the maximum allowable operating values according to the Product Specification. Actual operating values are typically lower.

The values listed above represent specified limits for the product and are subject to change. The data should be used for basic information only. Formal, controlled specifications may be obtained from CPI for use in equipment design.



For information on this and other CPI products, visit our website at: www.cpii.com, or contact: CPI MPP Division, 607 Hansen Way, Palo Alto, CA 94303
TELEPHONE: 1(800) 414-8823. FAX: (650) 856-0705 | EMAIL: marketing@cpii.com

TYPICAL PEAK OUTPUT POWER VERSUS BEAM VOLTAGE

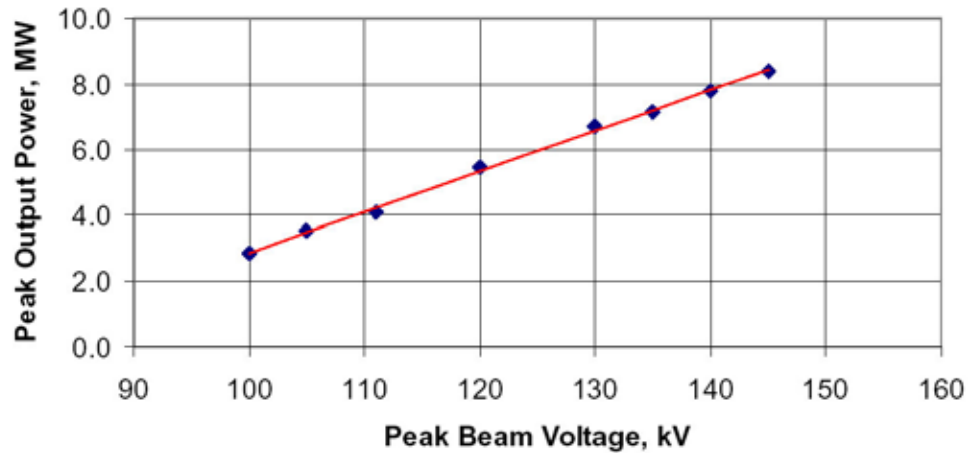

The values listed above represent specified limits for the product and are subject to change. The data should be used for basic information only. Formal, controlled specifications may be obtained from CPI for use in equipment design.



For information on this and other CPI products, visit our website at: www.cpii.com,
 or contact: CPI MPP Division, 607 Hansen Way, Palo Alto, CA 94303
TELEPHONE: 1(800) 414-8823. **FAX:** (650) 856-0705 | **EMAIL:** marketing@cpii.com