

## Features

- **Operating Voltage:** 3.3V, 5V tolerant
- **Access Time:**
  - 17 ns
  - 15 ns
- **Very Low Power Consumption**
  - **Active:** 610 mW (Max) @ 17 ns<sup>(1)</sup>, 540 mW (Max) @ 25 ns
  - **Standby:** 3.3 mW (Typ)
- **Wide Temperature Range:** -55 to +125°C
- **TTL-Compatible Inputs and Outputs**
- **Asynchronous**
- **Designed on 0.25 µm Radiation Hardened Process**
- **No Single Event Latch Up below LET Threshold of 80 MeV/mg/cm<sup>2</sup>**
- **Tested up to a Total Dose of 300 krad(Si) according to MIL-STD-883 Method 1019**
- **500 Mils Wide FP36 Package**
- **ESD Better than 2000V**
- **Quality Grades:** ESCC with 9301/052, QML-Q or V with smd 5962-05208

Note: 1. 650 mW (Max) @ 15 ns

## Description

The AT60142FT is a very low power CMOS static RAM organized as 512K x 8 bits.

Atmel brings the solution to applications where fast computing is as mandatory as low consumption, such as aerospace electronics, portable instruments, or embarked systems.

Utilizing an array of six transistors (6T) memory cells, the AT60142FT combines an extremely low standby supply current (Typical value = 1 mA) with a fast access time at 15 ns over the full military temperature range. The high stability of the 6T cell provides excellent protection against soft errors due to noise.

The AT60142FT is processed according to the methods of the latest revision of the MIL PRF 38535 or ESCC 9000.

It is produced on a radiation hardened 0.25 µm CMOS process.




**Rad Hard  
512K x 8  
5V Tolerant  
Very Low Power  
CMOS SRAM**

**AT60142FT**


Rev. 7726A-AERO-07/07



Block Diagram

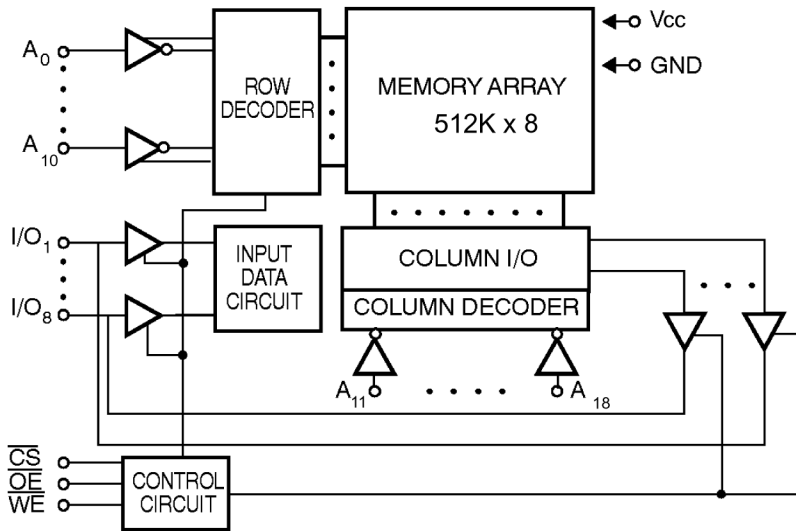

Pin Configuration

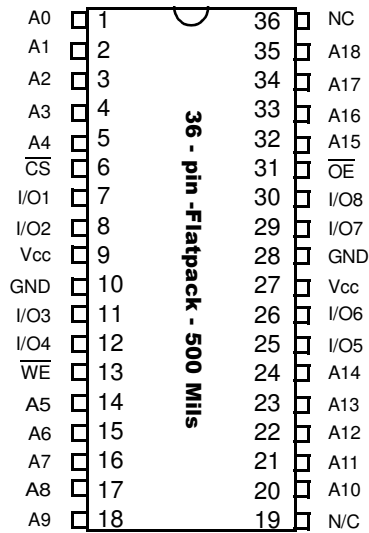

## Pin Description

**Table 1.** Pin Names

Name	Description
A0 - A18	Address Inputs
I/O1 - I/O8	Data Input/Output
$\overline{CS}$	Chip Select
$\overline{WE}$	Write Enable
$\overline{OE}$	Output Enable
Vcc	Power Supply
GND	Ground

**Table 2.** Truth Table<sup>(1)</sup>

$\overline{CS}$	$\overline{WE}$	$\overline{OE}$	Inputs/Outputs	Mode
H	X	X	Z	Deselect/ Power-down
L	H	L	Data Out	Read
L	L	X	Data In	Write
L	H	H	Z	Output Disable

Note: 1. L=low, H=high, X= L or H, Z=high impedance.

## Electrical Characteristics

### Absolute Maximum Ratings\*

Supply Voltage to GND Potential:.....	-0.5V + 4.6V
DC Input Voltage:.....	GND -0.5V to 7V
DC Output Voltage High Z State:.....	GND -0.5V to 4.6V
Storage Temperature:.....	-65°C to + 150°C
Output Current Into Outputs (Low): .....	20 mA
Electro Statics Discharge Voltage:.....	> 2000V (MIL STD 883D Method 3015.3)

\*NOTE: Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### Military Operating Range

	Operating Voltage	Operating Temperature
Military	3.3 ± 0.3V	-55°C to + 125°C

### Recommended DC Operating Conditions

Parameter	Description	Min	Typ	Max	Unit
V <sub>CC</sub>	Supply voltage	3	3.3	3.6	V
GND	Ground	0.0	0.0	0.0	V
V <sub>IL</sub>	Input low voltage	GND - 0.3	0.0	0.8	V
V <sub>IH</sub>	Input high voltage	2.2	–	5.5 <sup>(1)</sup>	V

Note: 1. 5.8V in transient conditions.

### Capacitance

Parameter	Description	Min	Typ	Max	Unit
C <sub>in</sub> <sup>(1)</sup>	Input capacitance	–	–	12	pF
C <sub>out</sub> <sup>(1)</sup>	Output capacitance	–	–	12	pF

Note: 1. Guaranteed but not tested.

## DC Parameters

Parameter	Description	Minimum	Typical	Maximum	Unit
IIX <sup>(1)</sup>	Input leakage current	-1	–	1	μA
IOZ <sup>(1)</sup>	Output leakage current	-1	–	1	μA
IIH <sup>(2)</sup> at 5.5V	Input Leakage Current	–	–	2	μA
IOZH <sup>(2)</sup> at 5.5V	Output Leakage Current	–	–	1.5	μA
VOL <sup>(3)</sup>	Output low voltage	–	–	0.4	V
VOH <sup>(4)</sup>	Output high voltage	2.4	–	–	V

1.  $GND < V_{IN} < V_{CC}$ ,  $GND < V_{OUT} < V_{CC}$  Output Disabled.
2.  $V_{IN} = 5.5V$ ,  $V_{OUT} = 5.5V$ , Output Disabled.
3.  $V_{CC}$  min.  $I_{OL} = 6$  mA
4.  $V_{CC}$  min.  $I_{OH} = -4$  mA.

## Consumption

Symbol	Description	TAVAV/TAVAW Test Condition	AT60142FT-17	AT60142FT-15	Unit	Value
$I_{CCSB}^{(1)}$	Standby Supply Current	–	2	2.5	mA	max
$I_{CCSB1}^{(2)}$	Standby Supply Current	–	1.8	2	mA	max
$I_{CCOP}^{(3)}$ Read	Dynamic Operating Current	15 ns 17 ns 25 ns 50 ns 1 μs	- 170 150 75 10	180 170 150 75 10	mA	max
$I_{CCOP}^{(4)}$ Write	Dynamic Operating Current	15 ns 17 ns 25 ns 50 ns 1 μs	- 145 130 120 100	150 145 130 120 100	mA	max


1.  $\overline{CS} \geq V_{IH}$
2.  $\overline{CS} \geq V_{CC} - 0.3V$
3.  $F = 1/T_{TAVAV}$ ,  $I_{out} = 0$  mA,  $\overline{WE} = \overline{OE} = V_{IH}$ ,  $V_{IN} = GND/V_{CC}$ ,  $V_{CC}$  max.
4.  $F = 1/T_{TAVAW}$ ,  $I_{out} = 0$  mA,  $\overline{WE} = V_{IL}$ ,  $\overline{OE} = V_{IH}$ ,  $V_{IN} = GND/V_{CC}$ ,  $V_{CC}$  max.

## Data Retention Mode

Atmel CMOS RAM's are designed with battery backup in mind. Data retention voltage and supply current are guaranteed over temperature. The following rules insure data retention:

1. During data retention chip select  $\overline{CS}$  must be held high within  $V_{CC}$  to  $V_{CC} - 0.2V$ .
2. Output Enable ( $\overline{OE}$ ) should be held high to keep the RAM outputs high impedance, minimizing power dissipation.
3. During power-up and power-down transitions  $\overline{CS}$  and  $\overline{OE}$  must be kept between  $V_{CC} + 0.3V$  and 70% of  $V_{CC}$ .
4. The RAM can begin operation  $> t_R$  ns after  $V_{CC}$  reaches the minimum operation voltages (3V).

**Figure 1.** Data Retention Timing

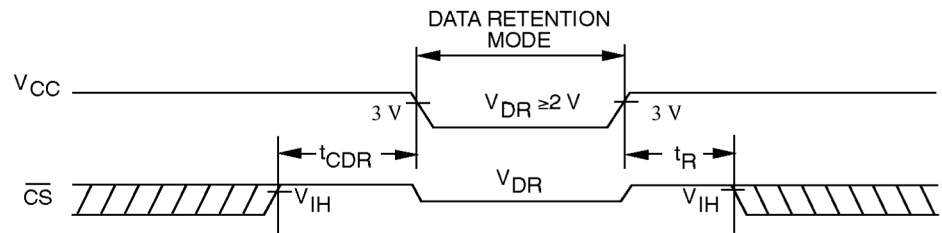

## Data Retention Characteristics


Parameter	Description	Min	Typ $T_A = 25^\circ C$	Max	Unit
$V_{CCDR}$	$V_{CC}$ for data retention	2.0	–	–	V
$t_{CDR}$	Chip deselect to data retention time	0.0	–	–	ns
$t_R$	Operation recovery time	$t_{AVAV}^{(1)}$	–	–	ns
$I_{CCDR}^{(2)}$	Data retention current	–	0.700	1.5 (AT60142FT-15)	mA
				1.3 (AT60142FT-17)	

1.  $T_{AVAV}$  = Read cycle time.
2.  $CS = V_{CC}$ ,  $V_{IN} = GND/V_{CC}$ .

## AC Characteristics

Temperature Range:..... -55 +125°C  
 Supply Voltage:..... 3.3 ±0.3V  
 Input Pulse Levels: ..... GND to 3.0V  
 Input Rise and Fall Times:..... 3ns (10 - 90%)  
 Input and Output Timing Reference Levels: ..... 1.5V  
 Output Loading  $I_{OL}/I_{OH}$ :..... See Figure 1

**Figure 2.** AC Test Loads Waveforms

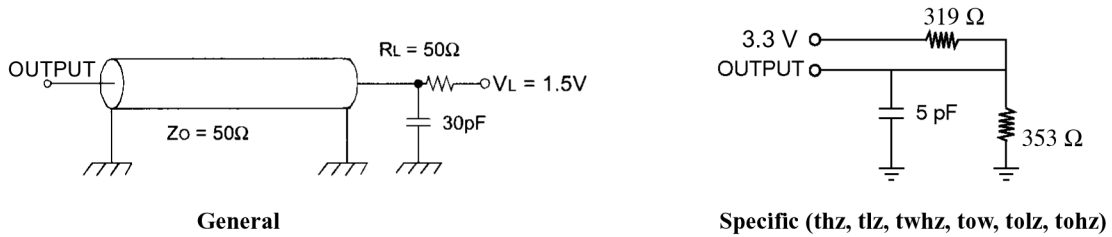


## Write Cycle


Symbol	Parameter	AT60142FT-17	AT60142FT-15	Unit	Value
TAVAW	Write cycle time	17	15	ns	min
TAVWL	Address set-up time	0	0	ns	min
TAVWH	Address valid to end of write	8	8	ns	min
TDVWH	Data set-up time	7	7	ns	min
TELWH	$\overline{CS}$ low to write end	12	10	ns	min
TWLQZ	Write low to high $Z^{(1)}$	7	6	ns	max
TWLWH	Write pulse width	8	8	ns	min
TWHAX	Address hold from end of write	0	0	ns	min
TWHDX	Data hold time	0	0	ns	min
TWHQX	Write high to low $Z^{(1)}$	3	3	ns	min

Notes: 1. Parameters guaranteed, not tested, with output loading 5 pF. (See "AC Test Loads Waveforms" on page 7.)

**Figure 3. Write Cycle 1.  $\overline{WE}$  Controlled,  $\overline{OE}$  High During Write**

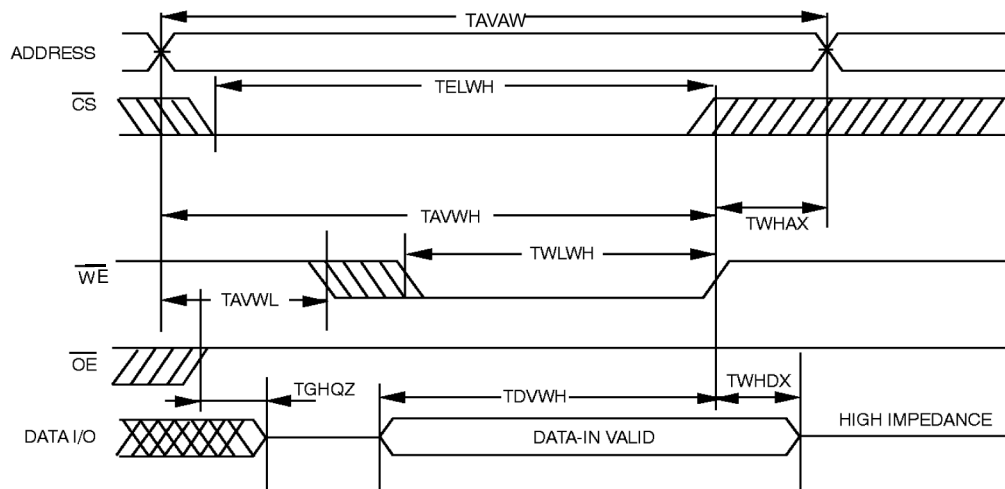


**Figure 4. Write Cycle 2.  $\overline{WE}$  Controlled,  $\overline{OE}$  Low**

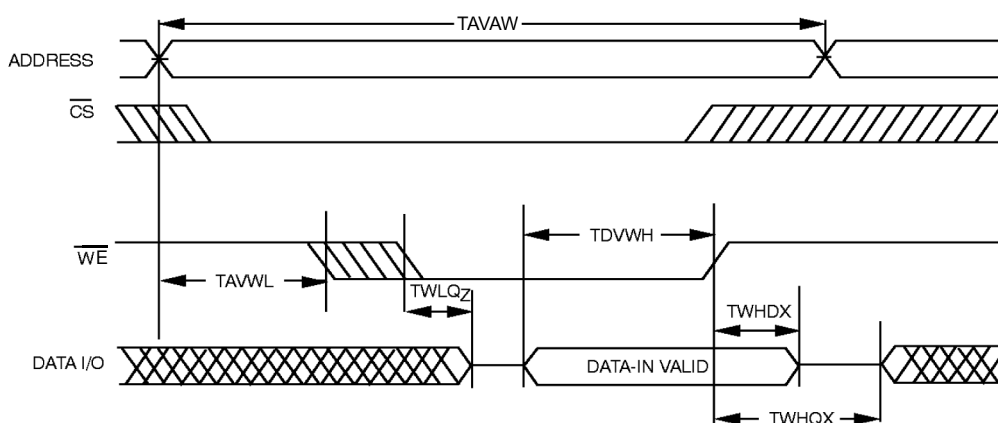



**Figure 5. Write Cycle 3.  $\overline{CS}$  Controlled**

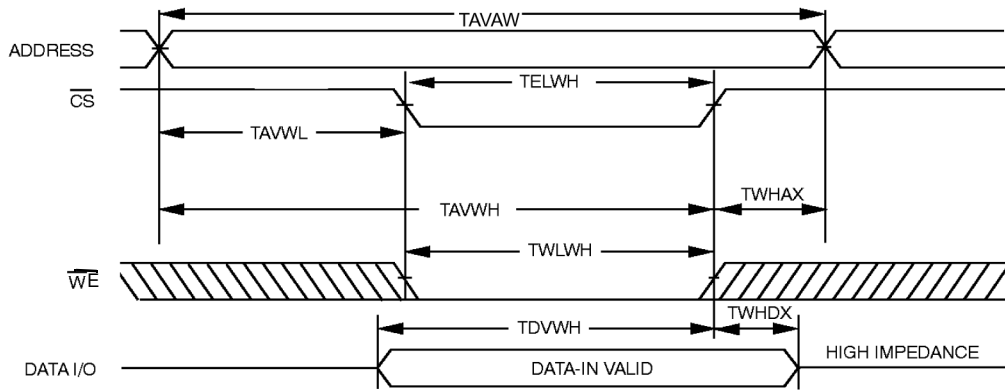


**Note:** The internal write time of the memory is defined by the overlap of  $\overline{CS}$  Low and  $\overline{W}$  LOW. Both signals must be activated to initiate a write and either signal can terminate a write by going in active mode. The data input setup and hold timing should be referenced to the active edge of the signal that terminates the write. Data out is high impedance if  $\overline{OE} = V_{IH}$ .

## Read Cycle


Symbol	Parameter	AT60142FT-17	AT60142FT-15	Unit	Value
TAVAV	Read cycle time	17	15	ns	min
TAVQV	Address access time	17	15	ns	max
TAVQX	Address valid to low Z	5	5	ns	min
TELQV	Chip-select access time	17	15	ns	max
TELQX	$\overline{CS}$ low to low Z <sup>(1)</sup>	5	5	ns	min
TEHQZ	$\overline{CS}$ high to high Z <sup>(1)</sup>	7	6	ns	max
TGLQV	Output Enable access time	8	6	ns	max
TGLQX	$\overline{OE}$ low to low Z <sup>(1)</sup>	2	2	ns	min
TGHQZ	$\overline{OE}$ high to high Z <sup>(1)</sup>	6	5	ns	max

Note: 1. Parameters guaranteed, not tested, with output loading 5 pF. (See "AC Test Loads Waveforms" on page 7.)

**Figure 6.** Read Cycle nb 1: Address Controlled ( $\overline{CS} = \overline{OE} = V_{IL}$ ,  $\overline{WE} = V_{IH}$ )

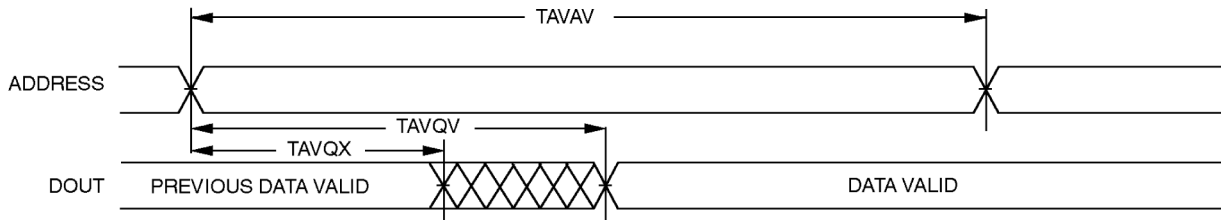

**Figure 7.** Read Cycle nb 2: Chip Select Controlled ( $\overline{WE} = V_{IH}$ )

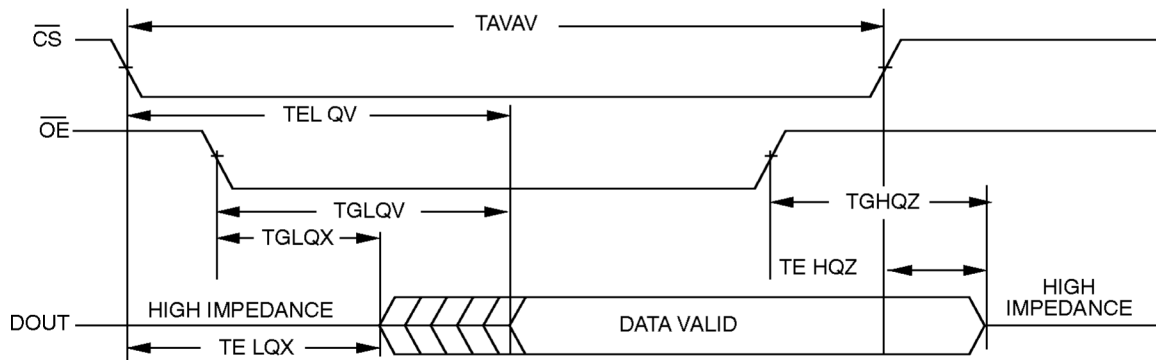




## Ordering Information

Part Number	Temperature Range	Speed	Package	Flow
AT60142FT-DC17M-E	25°C	17 ns/5V tol.	FP36.5	Engineering Samples
5962-0520801QXC	-55° to +125°C	17 ns/5V tol.	FP36.5	QML Q
5962-0520801VXC	-55° to +125°C	17 ns/5V tol.	FP36.5	QML V
5962R0520801VXC	-55° to +125°C	17 ns/5V tol.	FP36.5	QML V RHA
930105201	-55° to +125°C	17 ns/5V tol.	FP36.5	ESCC
AT60142FT-DS17M-E	25°C	17 ns/5V tol.	FP36.5 grounded lid	Engineering Samples
5962-0520801QYC	-55° to +125°C	17 ns/5V tol.	FP36.5 grounded lid	QML Q
5962-0520801VYC	-55° to +125°C	17 ns/5V tol.	FP36.5 grounded lid	QML V
5962R0520801VYC	-55° to +125°C	17 ns/5V tol.	FP36.5 grounded lid	QML V RHA
AT60142FT-DS17ESCC <sup>(3)</sup>	-55° to +125°C	17 ns/5V tol.	FP36.5 grounded lid	ESCC
AT60142FT-DD17M-E <sup>(1)</sup>	25°C	17 ns/5V tol.	Die	Engineering Samples
AT60142FT-DD17MSV <sup>(1) (2)</sup>	-55° to +125°C	17 ns/5V tol.	Die	QML V
AT60142FT-DS15M-E <sup>(1)</sup>	25°C	15 ns/5V tol.	FP36.5 grounded lid	Engineering Samples
AT60142FT-DS15MMQ <sup>(1) (2)</sup>	-55° to +125°C	15 ns/5V tol.	FP36.5 grounded lid	QML Q
AT60142FT-DS15MSV <sup>(1) (2)</sup>	-55° to +125°C	15 ns/5V tol.	FP36.5 grounded lid	QML V
AT60142FT-DS15MSR <sup>(1) (2)</sup>	-55° to +125°C	15 ns/5V tol.	FP36.5 grounded lid	QML V RHA
AT60142FT-DS15ESCC <sup>(3)</sup>	-55° to +125°C	15 ns/5V tol.	FP36.5 grounded lid	ESCC
AT60142FT-DD15M-E <sup>(1)</sup>	25°C	15 ns/5V tol.	Die	Engineering Samples
AT60142FT-DS15MSV	-55° to +125°C	15 ns/5V tol.	Die	QML V

- Note:
1. Contact Atmel for availability.
  2. Will be replaced by SMD part number when available.
  3. Will be replaced by ESCC part number when available.

Package Drawings

36-lead Flat Pack (500 Mils)

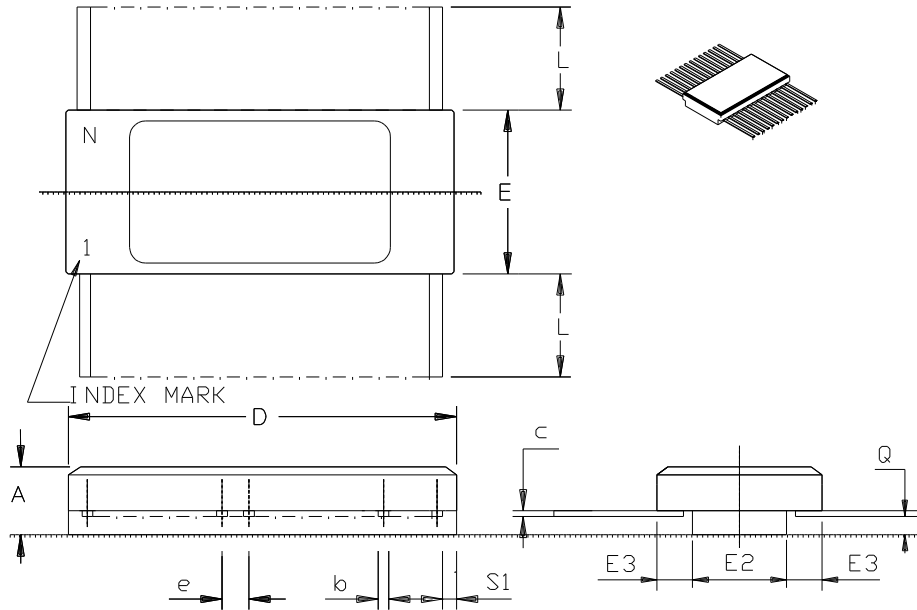

	MM		INCH	
	Min	Max	Min	Max
A	2.29	3.05	.090	.120
b	0.38	0.51	.015	.020
c	0.10	0.18	.004	.007
D	---	23.62	---	.930
E	11.99	12.40	.472	.488
E2	8.89	---	.350	---
E3	0.76	---	.030	---
e	1.27 BSC		.050 BSC	
L	7.75	8.26	.305	.325
Q	0.66	1.14	.026	.045
S1	0.13	---	.005	---
N	36		36	

- Notes: 1. package DC : lid is NOT connected to GROUND  
 2. package DS : lid is connected to GROUND



## Atmel Corporation

2325 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 487-2600

## Regional Headquarters

### Europe

Atmel Sarl  
Route des Arsenalux 41  
Case Postale 80  
CH-1705 Fribourg  
Switzerland  
Tel: (41) 26-426-5555  
Fax: (41) 26-426-5500

### Asia

Room 1219  
Chinachem Golden Plaza  
77 Mody Road Tsimshatsui  
East Kowloon  
Hong Kong  
Tel: (852) 2721-9778  
Fax: (852) 2722-1369

### Japan

9F, Tonetsu Shinkawa Bldg.  
1-24-8 Shinkawa  
Chuo-ku, Tokyo 104-0033  
Japan  
Tel: (81) 3-3523-3551  
Fax: (81) 3-3523-7581

## Atmel Operations

### Memory

2325 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 436-4314

### Microcontrollers

2325 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 436-4314

La Chantrerie  
BP 70602  
44306 Nantes Cedex 3, France  
Tel: (33) 2-40-18-18-18  
Fax: (33) 2-40-18-19-60

### ASIC/ASSP/Smart Cards

Zone Industrielle  
13106 Rousset Cedex, France  
Tel: (33) 4-42-53-60-00  
Fax: (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906, USA  
Tel: 1(719) 576-3300  
Fax: 1(719) 540-1759

Scottish Enterprise Technology Park  
Maxwell Building  
East Kilbride G75 0QR, Scotland  
Tel: (44) 1355-803-000  
Fax: (44) 1355-242-743

### RF/Automotive

Theresienstrasse 2  
Postfach 3535  
74025 Heilbronn, Germany  
Tel: (49) 71-31-67-0  
Fax: (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906, USA  
Tel: 1(719) 576-3300  
Fax: 1(719) 540-1759

### Biometrics/Imaging/Hi-Rel MPU/ High Speed Converters/RF Datacom

Avenue de Rochepleine  
BP 123  
38521 Saint-Egreve Cedex, France  
Tel: (33) 4-76-58-30-00  
Fax: (33) 4-76-58-34-80

---

### Literature Requests

[www.atmel.com/literature](http://www.atmel.com/literature)

**Disclaimer:** Atmel Corporation makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in Atmel's Terms and Conditions located on the Company's web site. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Atmel are granted by the Company in connection with the sale of Atmel products, expressly or by implication. Atmel's products are not authorized for use as critical components in life support devices or systems.

©2007 Atmel Corporation. All rights reserved. Atmel® and combinations thereof are the registered trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be the trademarks of others.



Printed on recycled paper.