used for: D-SUB COMBINATION

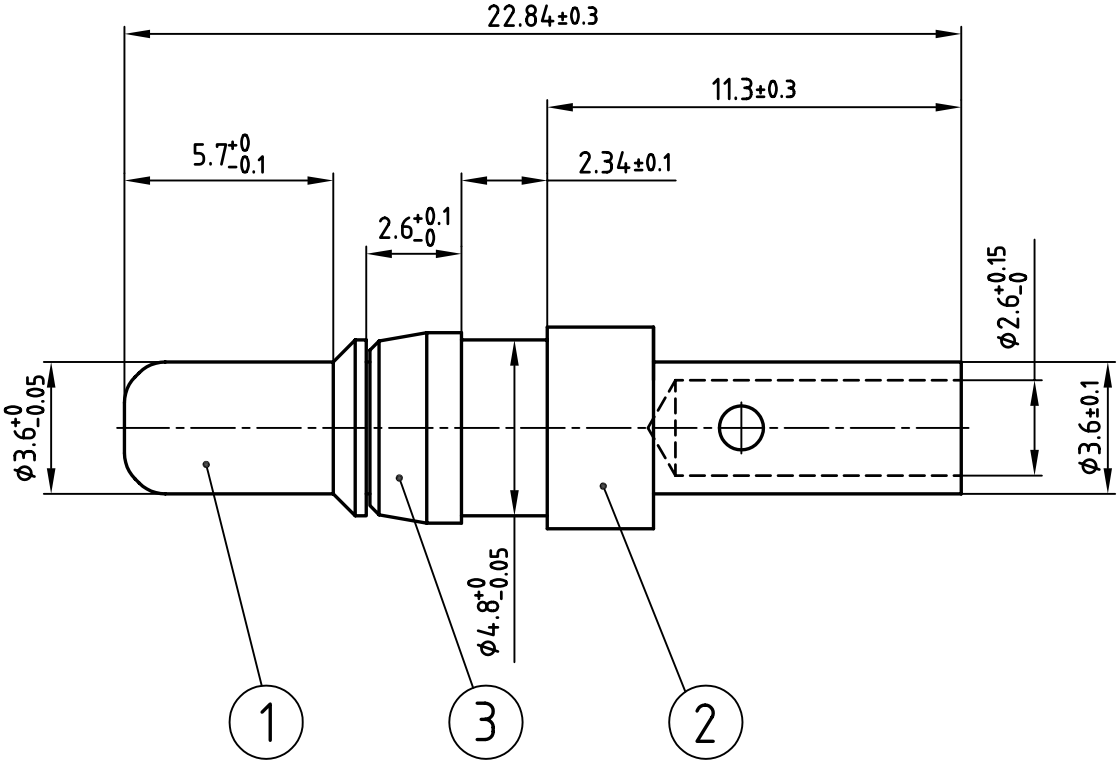


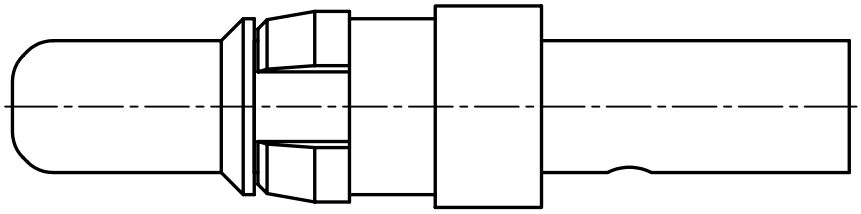

## NOTES:

1. MATERIAL: COPPER ALLOY
2. PLATING:
   ITEM 1: min. 30µ" HARD GOLD OVER min. 50µ" NICKEL
   ITEM 2: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL
   ITEM 3: NICKEL PLATED

Directive 2002/95/EC „RoHS" Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

| rev. | description | date | name |
|---|---|---|---|

tolerance

| 1998 | date | name |
|---|---|---|
| drawn | 23.03. | Barcinski |
| appd. | 23.03. | Mickenbecker |
| norm | | |
| d-old | | |

CONEC®

scale: 5:1
material: SEE NOTES

title:
HIGH POWER CONTACT MALE
CRIMP VERSION 20A
D-SUB COMBINATION

dwg no: 13K1ID2A
AutoCAD/REL.13
DIN-A 4
sh: 1/1

part no: 131C11029X