


# PCI-6886

## Intel® Celeron® M PCI Half-sized SBC with VGA/LVDS/LAN/USB 2.0/SATA and SSD

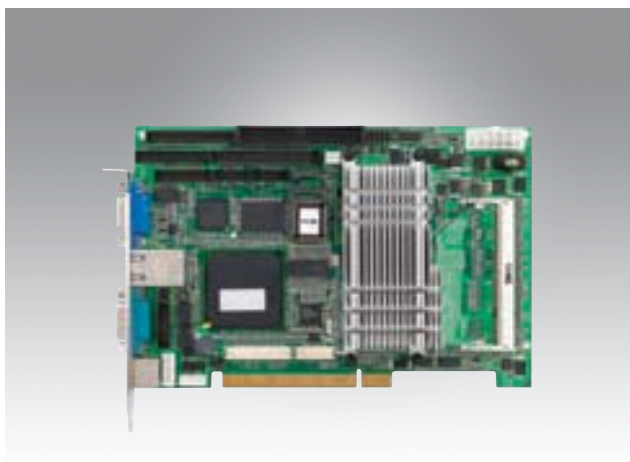

### Features

- Supports Intel® Celeron® M Processor
- Supports 400 MHz Front Side Bus
- Supports 200 MHz, 266 MHz DDR SDRAM
- Supports up to 2 Channel 36 bits LVDS for LCD
- Supports four USB 2.0 ports
- Supports two SATA ports

### Specifications

Processor System	CPU	Celeron M	
	Max. Speed	600 MHz	
	L2 Cache	512 KB	
	Chipset	Intel 852GM/GMCH + 6300ESB	
	BIOS	AWARD 4 Mbit FWH	
Bus	Front Side Bus	400 MHz	
	PCI	32-bit/ 33 MHz	
	ISA	-	
Memory	Technology	DDR 200/266/333 MHz SDRAM SODIMM	
	Max. Capacity	2GB	
	Socket	200-pin SODIMM x 2	
Graphics	Controller	Chipset integrated VGA controller VGA mode: 1600 x 1200 @ 32bpp (85 MHz) LVDS display mode: up to UXGA panel resolution with frequency range from 25 MHz to 113 MHz	
	VRAM	Dynamically shared system memory up to 64 MB	
	LVDS	Dual-channel 36-bit LVDS	
	Dual Display	CRT + LVDS CRT + DVI, LVDS + DVI (only operates under Windows)	
Ethernet	Interface	10/100 Base-T, 10/1000 Base-T(Optional)	
	Controller	Intel 82551ER (FE); Intel 82541PI(GbE) (Optional)	
	Connector	RJ-45*1	
EIDE	Mode	ATA 100/66/33	
	Channel	2(Max. 4 devices)	
SATA (150MB/s)	port	2	
I/O Interface	USB	Max. 4 (USB 2 compliant)	
	Serial	3 (RS-232)/ 1 (RS-232/RS-422/RS-485)	
	Parallel	1	
	FDD	1	
	PS/2	1 (for mouse and Keyboard, Y cable included)	
	Watchdog Timer	Output	Interrupt, system reset
Miscellaneous	Interval	Programmable, 1-255 sec.	
	Audio Output	AC97 Audio interface (requires an audio extension module P/N: PCM-231A-00A1E)	
	Solid State Disk	Compact Flash socket (Type I/II), shared with secondary IDE	
Power Requirement	Typical	Celeron M 600 MHz 512KB L2, SDRAM SODIMM	
	Max	+12 V (0.31 A)	+5 V (1.91 A)
		+12 V (0.32 A)	+5 V (2.42 A)
Environment	Temperature	Operating	Non-Operating
		0 ~ 60° C	- 20 ~ 70° C
Physical	Dimensions	185 mm (L) x 122 mm (W) (7.3" x 4.8")	

Computer On Modules 1

Embedded Single Board Computers 2

Compact Embedded Computers 3

Pre-configured Systems 4

Industrial Motherboards 5

Slot Single Board Computers 6

Industrial Computer Chassis 7

Industrial Computer Peripherals 8

Panel PCs 9

Display Solutions 10

Digital Video Solutions 11


Vehicle Mounted Computers 12

Portable Computers 13

M2M Modules 14

Embedded Software Services 15

### Board Diagram

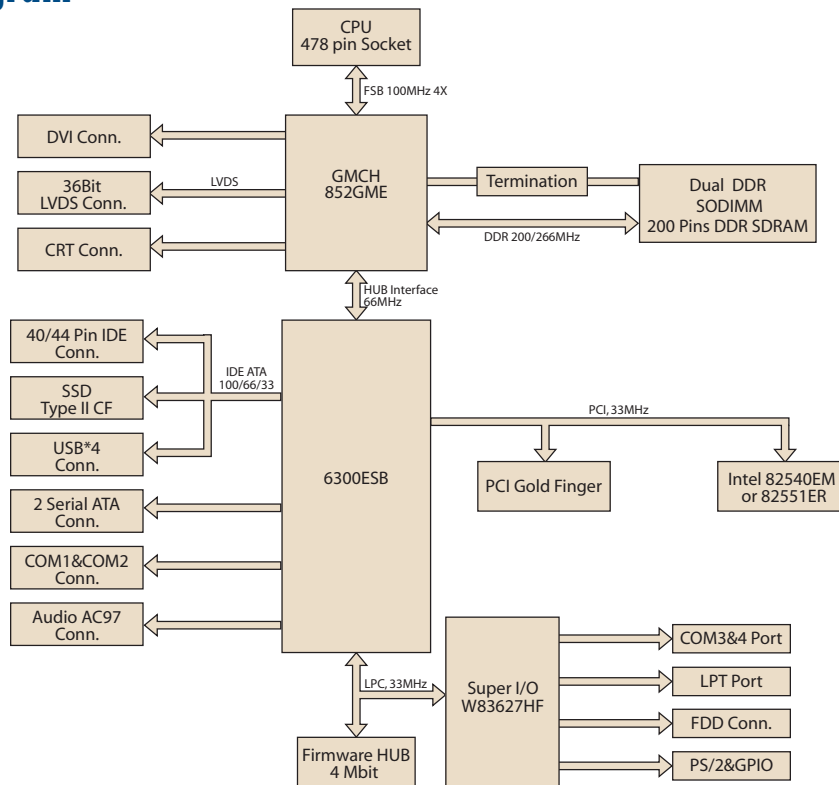

### Ordering Information

Part Number	On board CPU	FE LAN
PCI-6886F-M0A1E	Celeron M 600 MHz	Intel 82551ER

### Bracket View



PCI-6886F-M0A1E

### Packing List

Part Number	Description	Quantity
1700060202	Y Cable for PS/2 Keyboard, PS/2 Mouse	x 1
1701400452	E-IDE (HDD) cable	x 1
1701340603	FDD cable (600mm)	x 1
1700260250	Parallel port cable	x 1
1700000265	Power cable	x 1
1700001276	ATX feature cable	x 1
9689000002	Jumper pack	x 1
-	Startup manual	x 1
-	Utility CD	x 1

### Accessories

Part Number	Description
IPC-644BP-15ZE	4-slot chassis w/ 150W power supply
IPC-6806SB-15ZBE	6-slot chassis w/ 150W power supply
1703100260	USB cable with 2 ports (2.0mm pitch)
CF-HDD-ADP	CompactFlash 50-pin to IDE 44-pin adapter
PCM-231A-00A1E	Audio module with Line-in, Line-out, Mic
1701140201	COM2 cable (2.0mm pitch)
1700001166	COM3 & 4 cable with bracket (2.0mm pitch)