



1. Mechanical:

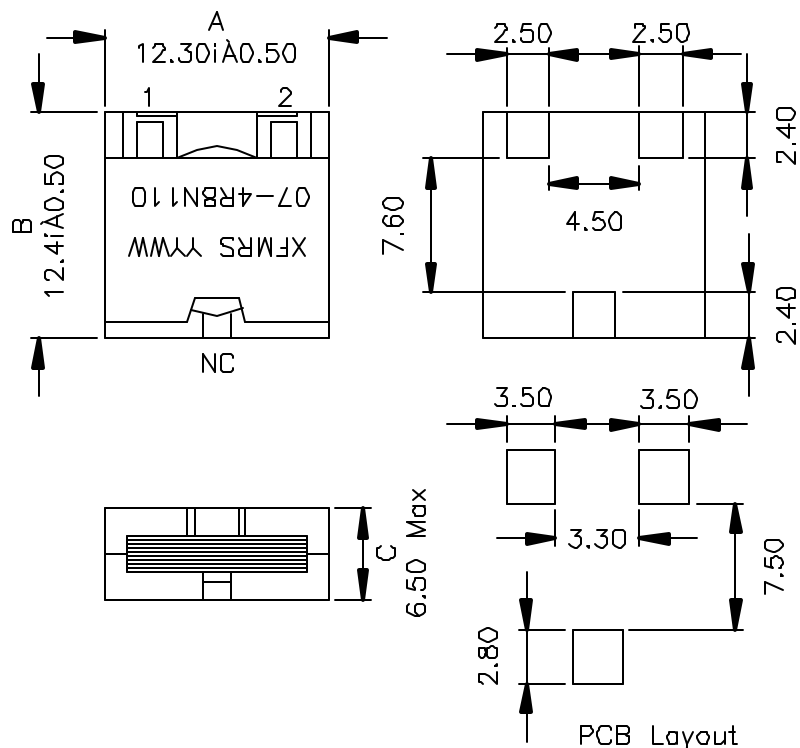

Note:

1. Solderability. Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Operating Temperature Range, 0°C to +70°C

2. Schematic:



3. ELECTRICAL SPECIFICATIONS: @25°C

OCL: $4.8\mu H \pm 10\%$ @100KHz, 0.25V, ODC
 CURRENT: 11.0 ADC Max, OCL DROP BY 15% Max
 DC Res.: 16.30 mOhms Max

DOC. REV A/2

XFMRS Inc	Title: INDUCTOR		
	UNLESS OTHERWISE SPECIFIED	P/N: XF121207-4R8N110	REV. A
	TOLERANCES: .xx ± 0.25	DWN. 李小锋	Oct-08-01
	Dimensions in mm	CHK. 廖玉坤	Oct-08-01
SHEET 1 OF 1	APP. BW	Oct-08-01	