


RD28S Series

Centrifugal Blower

Ø 280mm

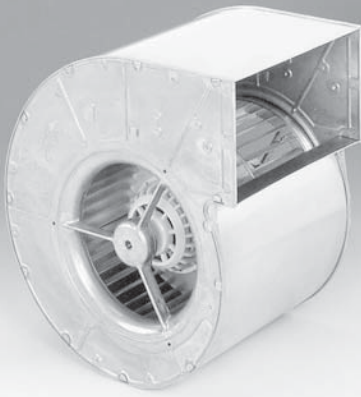

- AC dual inlet, forward curved centrifugal blower in compact housing. The integrated external-rotor motor is mounted inside the housing.


- Housing and impeller made of galvanized sheet-steel. Forward curved impellers are directly press-fitted onto the rotor of the external-rotor motor.

- Direction of rotation is CCW as seen from inlet side. Insulation class "F".

- Maintenance-free ball bearings.

- UL, CSA, VDE approvals on some models, please contact application engineering.

Part Number	Curve	CFM @ 0	VAC	Hertz	Power (W)	dBA	Max Amb. Temp. C	Bearing Type	Features	Capacitor (µF)	Wgt. (lbs)
RD28S-6/206708	2	2350	230	800	60	n/a	40	Ball	Leads	20	54.0

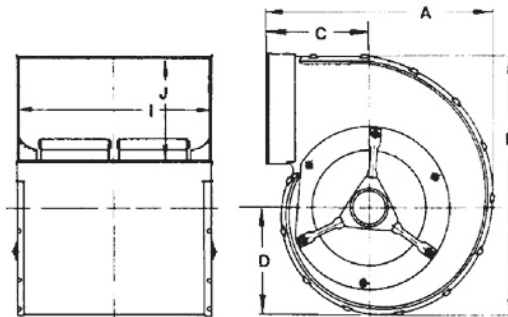

DIMENSIONS - Inches (mm)

PART NUMBER	A	B	C	D	I	J
RD28S-4/206708	18.50 (470)	20.59 (523)	8.15 (207)	8.78 (223)	14.88 (378)	7.72 (196)

