

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0432550107](#)
Status: **Active**
Overview: [mlx](#)
Description: 6.35mm (.250") Pitch MLX™ Power Connector Header, Vertical, with Plastic Polarizing Peg, 17 Circuits, Polyester 94V-0, Tin Plating, White, Lead-free

Documents:

[3D Model](#) [Product Specification PSX-42002-0001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
 UL E29179

General

Product Family PCB Headers
 Series [43255](#)
 Application Wire-to-Board
 Comments High Vibration Application
 Overview [mlx](#)
 Product Name MLX™

Physical

Breakaway No
 Circuits (Loaded) 15
 Circuits (maximum) 15
 Color - Resin Natural
 Durability (mating cycles max) 50
 First Mate / Last Break No
 Flammability 94V-2
 Glow-Wire Compliant No
 Guide to Mating Part Yes
 Keying to Mating Part Yes
 Lock to Mating Part Yes
 Mated Height (in) 1.195 In
 Mated Height (mm) 30.35 mm
 Material - Metal Phosphor Bronze
 Material - Plating Mating Tin
 Material - Plating Termination Tin
 Material - Resin Polyester
 Number of Rows 3
 Orientation Vertical
 PC Tail Length (in) 0.170 In
 PC Tail Length (mm) 4.30 mm
 PCB Locator Yes
 PCB Retention Yes
 PCB Thickness Recommended (in) 0.062 In
 PCB Thickness Recommended (mm) 1.57 mm
 Packaging Type Bag
 Pitch - Mating Interface (in) 0.250 In
 Pitch - Mating Interface (mm) 6.35 mm
 Pitch - Term. Interface (in) 0.250 In
 Pitch - Term. Interface (mm) 6.35 mm
 Plating min: Mating (µin) 140
 Plating min: Mating (µm) 3.5
 Polarized to Mating Part Yes

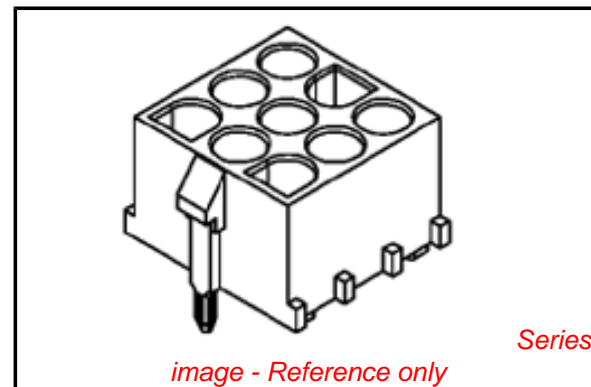

EU RoHS

ELV and RoHS Compliant
REACH SVHC Contains SVHC: No
Halogen-Free Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[43255Series](#)

Mates With

[42021 MLX™ Power Crimp Housing Plug.](#)
[42024 MLX Crimp Terminal](#)

Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55°C to +105°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	9A
Voltage - Maximum	600V

Solder Process Data

Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Wave Capable (TH only)
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-43255-003
Product Specification	PSX-42002-0001

This document was generated on 05/24/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

ITEM NO.	CIRCUIT SIZE	MATERIAL COLOR (SEE NOTE 1)	PIN (1) OR SOCKET (2) TERMINALS	TERMINAL PLATING (SEE NOTE 2)	TERMINAL LENGTH (SEE NOTE 3)	"A" DIM ±.015
43255-0057	2	A	2	A	1	.17/(4,3)
43255-0058		A	2	B	1	
43255-0059		B	1	A	1	
43255-0060		B	1	B	1	
43255-0061		A	2	A	2	.23/(5,8)
43255-0062		A	2	B	2	
43255-0063	B	1	A	2		
43255-0064	B	1	B	2		
43255-0065	3	A	2	A	1	.17/(4,3)
43255-0066		A	2	B	1	
43255-0067		B	1	A	1	
43255-0068		B	1	B	1	
43255-0069		A	2	A	2	.23/(5,8)
43255-0070		A	2	B	2	
43255-0071	B	1	A	2		
43255-0072	B	1	B	2		
43255-0073	4	A	2	A	1	.17/(4,3)
43255-0074		A	2	B	1	
43255-0075		B	1	A	1	
43255-0076		B	1	B	1	
43255-0077		A	2	A	2	.23/(5,8)
43255-0078		A	2	B	2	
43255-0079	B	1	A	2		
43255-0080	B	1	B	2		
43255-0081	6	A	2	A	1	.17/(4,3)
43255-0082		A	2	B	1	
43255-0083		B	1	A	1	
43255-0084		B	1	B	1	
43255-0085		A	2	A	2	.23/(5,8)
43255-0086		A	2	B	2	
43255-0087	B	1	A	2		
43255-0088	B	1	B	2		
43255-0089	9	A	2	A	1	.17/(4,3)
43255-0090		A	2	B	1	
43255-0091		B	1	A	1	
43255-0092		B	1	B	1	
43255-0093		A	2	A	2	.23/(5,8)
43255-0094		A	2	B	2	
43255-0095	B	1	A	2		
43255-0096	B	1	B	2		
43255-0097	12	A	2	A	1	.17/(4,3)
43255-0098		A	2	B	1	
43255-0099		B	1	A	1	
43255-0100		B	1	B	1	
43255-0101		A	2	A	2	.23/(5,8)
43255-0102		A	2	B	2	
43255-0103	B	1	A	2		
43255-0104	B	1	B	2		
43255-0105	15	A	2	A	1	.17/(4,3)
43255-0106		A	2	B	1	
43255-0107		B	1	A	1	
43255-0108		B	1	B	1	
43255-0109		A	2	A	2	.23/(5,8)
43255-0110		A	2	B	2	
43255-0111	B	1	A	2		
43255-0112	B	1	B	2		

RoHS COMPLIANT

EC No: 2007-0146 DRAWN BY: DRINJANG 2006/11/03 CHECKED BY: CHIKOSUDHIR 2006/11/03 APPROVED BY: APPR:SSUDHIR 2006/11/03 REV: E1	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
				IN/MM		---	INCH	
		4 PLACES ±---	±---	DRAWN BY	DATE	TITLE		
		3 PLACES ±---	±---	SSUDHIR	2004/06/08	HEADER HOUSING ASSEMBLY		
2 PLACES ±---	±---	CHECKED BY	DATE	0.84/(2,13) DIA. SERIES				
1 PLACE ±---	±---	GJLOWE	2004/06/08	COMPLIANT-POLARIZING PEG				
ANGULAR ±---°		APPROVED BY	DATE	MOLEX INCORPORATED				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		GJLOWE	2004/06/08	MATERIAL NO.	DOCUMENT NO.	SHEET NO.		
		SEE CHART		SDA-43255-00**		3 OF 4		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								