



1	Material: 0.0625" ± 0.007" Fr4/G10
2	Pins: shell material- Brass; finish- 10µ" Gold over 50µ" Nickel (min.).
3	Test Points: 0.25" sq. post. Gold flash on contact area, 150µ" Tin on tail.

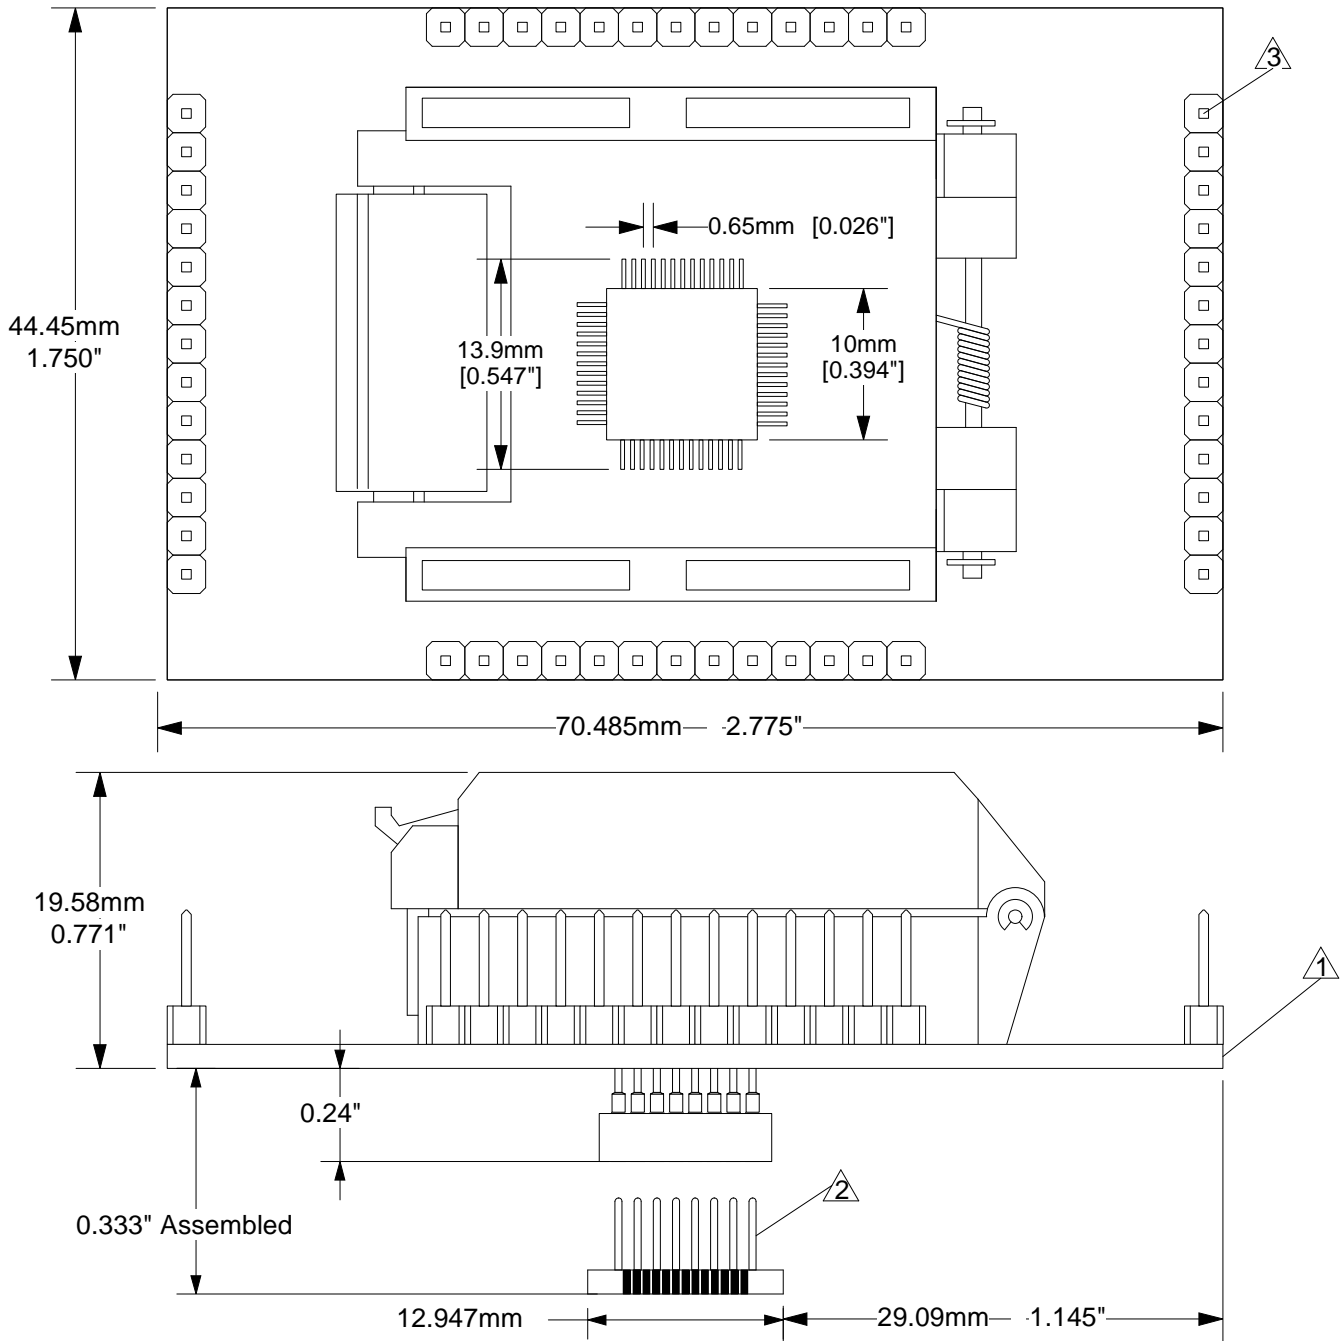

Description: Carrier Adaptor

52 position (0.65mm pitch) QFP Zero Insertion Force socket with test points to 52 position surface mountable QFP emulator foot. The 2 piece adaptor interconnects via a gold plated (0.05" center) Mini-grid socket interface.

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

 <p>© 1995 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com</p>	<p>CA-QFE52SB-L-Z-T-01 Drawing</p>	<p>Status: Released</p>	<p>Scale: 2:1</p>	<p>Rev: C</p>
	<p>Drawing: C Hautman</p>	<p>Date: 5/31/95</p>		
	<p>File: CA-QFE052SB-L-Z-T-01 Dwg</p>	<p>ECO#</p>		