



1. Mechanical Dimensions:

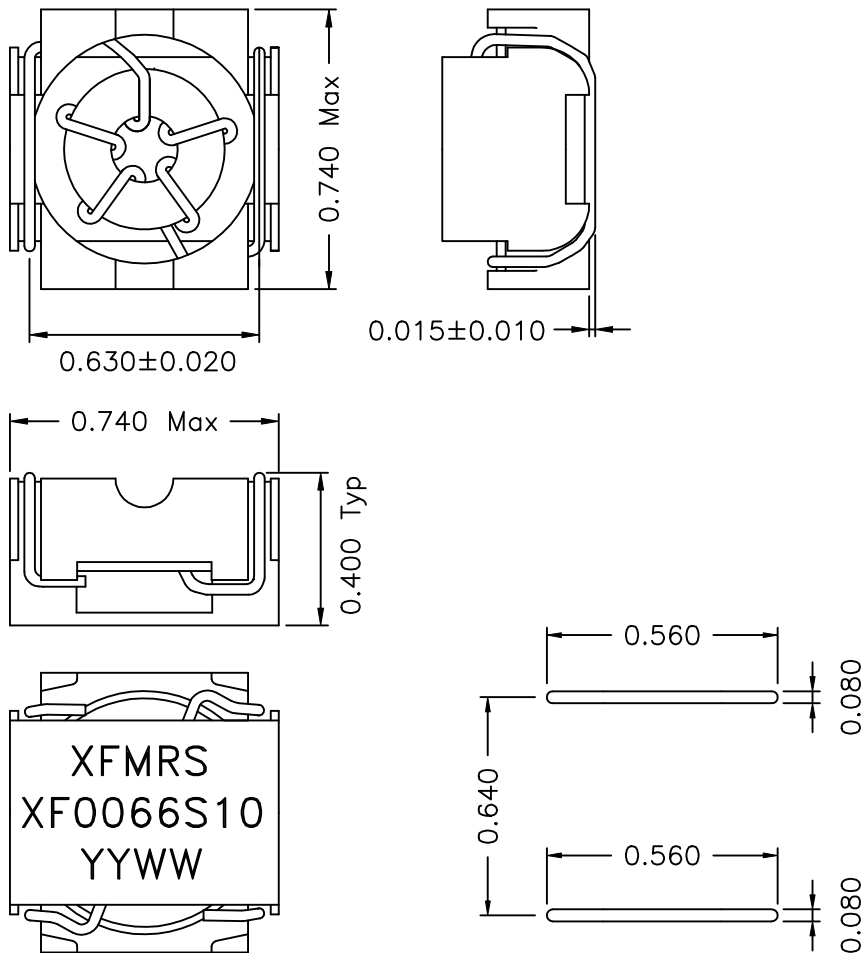

(SUGGESTED MOUNTING PAD)

Doc Rev: A/1

2. Schematic:



3. Electrical Specification:

OCL: 6.50uH±15% @10KHz, 0.1V NO DC
 OCL: 3.5uH Typical, @10KHz, 0.1V, 12.4Adc
 DC Res.: 0.0066 Ohms Max
 ETop: 3.13 Max

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

XFMRS Inc.	Title: TRANSFORMER		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 INCH Dimensions in INCH	P/N: XF0066S10	REV. A
	DWN.	李清儿	Jan-14-99
	CHK.	孙小松	Jan-14-99
SHEET 1 OF 1	APP.	BW	Jan-14-99