

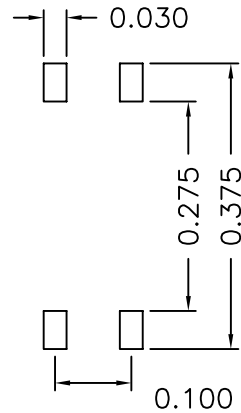
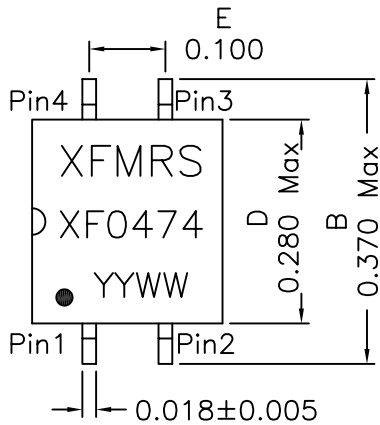
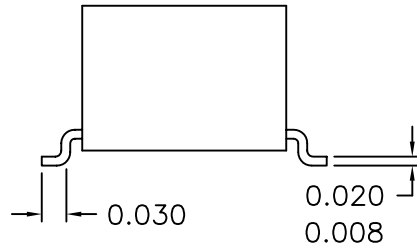


### 1. Dimensions:



### 2. Schematic:



### 3. Electrical Specifications

- OCL: 4.7mH +50%/-30% @10KHz 0.1V Each Wdg.
- LL: Pins 1-4 300nH Typ @100KHz, 0.1V (tie 2-3)
- Current Rating: 400mA
- DCR: 0.90 Ohms Max Each Wdg.
- Isolation: 750Vdc 2 sec

**Notes:**

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

DOC REV: A/3

<b>XFMRS Inc</b>	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0474-00SM	REV. A
TOLERANCES: .xxx ±0.010	DWN.	Juan Mao	Feb-16-04
Dimensions in INCH	CHK.	YK Liao	Feb-16-04
SHEET 1 OF 1	APP.	BW	Feb-16-04