
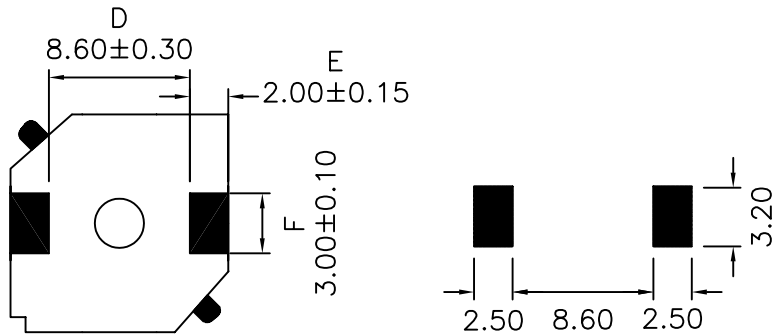


1. Mechanical Dimensions:

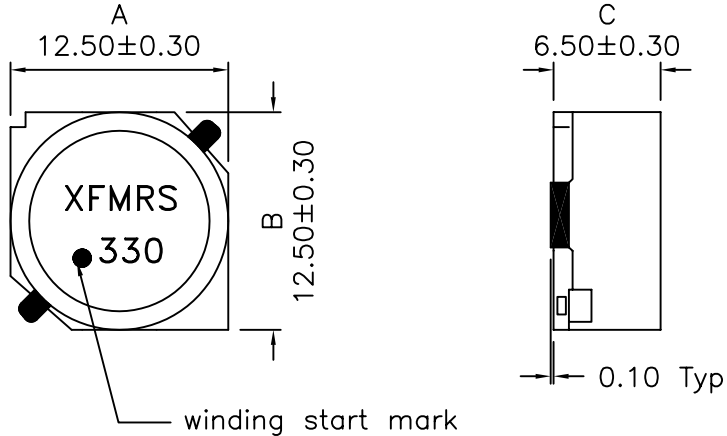


(BOTTOM VIEW)

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

DOC REV: A/1

2. Schematic:



3. Electrical Specifications:

OCL: 33uH±20% @1.0KHz 0.5V

DCR: 0.0406 Ohms ±20%

IDC 1: 2.80Adc Max (Based on 10% drop in OCL)

IDC 2: 3.40Adc Max (Based on 40°C Temp Rise)

XFMR Inc	Title: INDUCTOR	
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx. ±0.25 Dimensions in MM	P/N: XF12565S-330M DWN. 罗振江 CHK. 廖玉坤 APP. Isaiah M
SHT 1 OF 1	REV. A	Jul-13-03
		Jul-13-03
		Jul-13-03