

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0340833003

Status:

Active

Overview:

[mx150_sealed_connector_system](#)

Description:

MX150™ Female Cable Seal Terminal, Tin (Sn) Plating, 22 AWG, Left Reel Payoff, Contact Material Thickness 0.30mm (.012")

Documents:

[Drawing \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family

Crimp Terminals

Series

34083

Comments

Left Reel Payoff|Cable Seal

Crimp Quality Equipment

Yes

Overview

[mx150_sealed_connector_system](#)

Product Name

MX150™

Physical

Gender

Female

Material - Metal

High Performance Alloy (HPA)

Material - Plating Mating

Tin

Material - Plating Termination

Tin

Packaging Type

Reel

Plating min: Mating (µin)

20.00

Plating min: Mating (µm)

0.500

Plating min: Termination (µin)

20.00

Plating min: Termination (µm)

0.50

Termination Interface: Style

Crimp or Compression

Wire Insulation Diameter

2.60mm (.102") max.

Wire Size AWG

22

Wire Size mm²

0.5

Electrical

Current - Maximum per Contact

22A

Voltage - Maximum

250V

Material Info

Reference - Drawing Numbers

Sales Drawing

SD-34083-002



image - Reference only

Series

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

34083Series

Use With

[33471](#) Single Row Sealed Connector, [33472](#) Dual Row Sealed Connector, [33476](#) Dual Row Hybrid Sealed Connector, [34062](#) Single Row 2-Way Cable Sealed Connector, [34250](#) Single Row 3-Way Cable Sealed Connector

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.


Global	
Description	Product #
Manual Extraction Tool	0638131500
Hand Crimp Tool For MX150 Cable Seal Crimp Terminals	0638199300

Fine Adjust	<u>0639018200</u>
Applicator for	
MX150™ Cable Seal	
Crimp Terminals	

This document was generated on 05/19/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION




SEE TABLE 1 ON SHEET 2

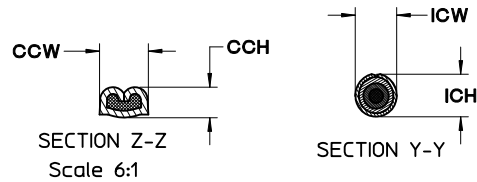

THICKNESS 2 (0.50-1.00 MICROMETERS)
ELECTRODEPOSITED REFLOW TIN (100% TIN, NO BRIGHTENERS)

A cross-sectional diagram of a cable joint. It shows a central cable with a central conductor and surrounding insulation. The joint is divided into two main regions: ZONE A1 (BEAM TIP) on the left and ZONE A2 (INSIDE TERMINAL) on the right. Arrows point to the boundaries of these zones. The diagram illustrates the internal structure of the joint, including the cable core and the surrounding jointing material.

THICKNESS 2 (2.50 - 4.00 MICROMETERS) ELECTRODEPOSITED
TIN (100% TIN) MATTE FINISH

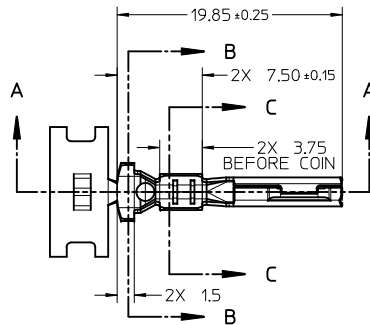



SCALE 2:1

6. MEETS FIELD CORRELATED LIFE TEST (FCLT) PER SAE/USCAR-20 (11/2001)

7. INSERTION FORCE WITH INLINE BLADE
AVG FROM PV TESTING = 3.5 N TIN (REFERENCE)
3.1 N GOLD (REFERENCE)

8. REFERENCE PK-31300-516 FOR REEL DIRECTION

9. REFERENCE CS-34083-002 FOR ADDITIONAL
CRIMP INFORMATION

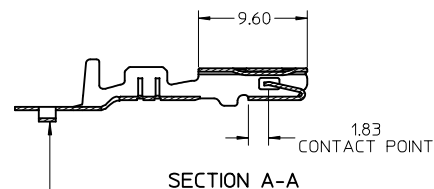


(11.43)
PROGRESSION

ENTER DESCRIPTION EC NO: UA2010-0419 DRWN:KFERGUSON CHKD:A.DHIR APPR:BNOSER 2009/12/02 2009/12/02	DESCRIPTION A5	REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 3:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION																									
			=0 =0	<table><tr><td></td><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>± ---</td><td>± ---</td></tr><tr><td>3 PLACES</td><td>± ---</td><td>± ---</td></tr><tr><td>2 PLACES</td><td>± 0.10</td><td>± ---</td></tr><tr><td>1 PLACE</td><td>± 0.3</td><td>± ---</td></tr></table>		mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± ---	2 PLACES	± 0.10	± ---	1 PLACE	± 0.3	± ---	<table><tr><td>DRAWN BY</td><td>DATE</td></tr><tr><td>K. FERGUSON</td><td>4/14/2009</td></tr><tr><td>CHECKED BY</td><td>DATE</td></tr><tr><td>A. DHIR</td><td>4/14/2009</td></tr><tr><td>APPROVED BY</td><td>DATE</td></tr><tr><td>B. MOSER</td><td>4/14/2009</td></tr></table>	DRAWN BY	DATE	K. FERGUSON	4/14/2009	CHECKED BY	DATE	A. DHIR	4/14/2009	APPROVED BY	DATE	B. MOSER	4/14/2009	TITLE MX 150 RECEPTACLE CABLE SEAL		
				mm	INCH																														
			4 PLACES	± ---	± ---																														
			3 PLACES	± ---	± ---																														
2 PLACES	± 0.10	± ---																																	
1 PLACE	± 0.3	± ---																																	
DRAWN BY	DATE																																		
K. FERGUSON	4/14/2009																																		
CHECKED BY	DATE																																		
A. DHIR	4/14/2009																																		
APPROVED BY	DATE																																		
B. MOSER	4/14/2009																																		
ANGULAR ± 3 °		MATERIAL NO.	DOCUMENT NO.																																
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-34083-002																															
		SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																

TABLE 1 – TERMINAL CRIMP DIMENSION REFERENCE TABLE											
SUPPLIER PART NO.		PLATING	WIRE SIZE (awg)	WIRE SPECIFICATION	CONDUCTOR CCH (SEC Z-Z) ±0.05	CONDUCTOR CCW (SEC Z-Z) ±0.10	INSULATOR ICH (SEC Y-Y) ±0.10	INSULATOR ICW (SEC Y-Y) ±0.10	WIRE PULL FORCE (N)	OSR CABLE SEAL PART NO.	YAZAKI CABLE SEAL PART NO.
RIGHT PAYOFF	LEFT PAYOFF										
34083-2001	34083-3001	TIN	14	MIL-123A	1.65	2.45	3.95	3.65	268	-	7158-3033-40
			14	MIL-135A1	1.65	2.45	3.80	3.65	268	E-1644-02	-
			16	MIL-123A	1.35	2.45	3.80	3.65	222	E-1644-02	-
34083-2002	34083-3002	TIN	18	MIL-123A	1.25	2.15	3.70	3.55	157	E-1644-00	-
				SAE J1128 (GXL)	1.25	2.15	3.90	3.55	157	E-1644-02	-
			20	MIL-123A	1.15	2.15	3.60	3.55	128	E-1644-00	-
				SAE J1128 (GXL)	1.15	2.15	3.80	3.55	128	E-1644-02	-
				MIL-123A	1.00	1.60	3.50	3.45	88	E-1644-01	-
34083-2003	34083-3003	TIN	22	MIL-123A	1.00	1.60	3.50	3.45	88	E-1644-01	-
34083-2001	34083-3001	TIN	2.00mm ²	JASO D 611(AVSS)	1.60	2.45	3.95	3.65	268	-	7158-3033-40
34083-2001	34083-3001	TIN	1.50mm ²	MIL-126A1	1.40	2.45	3.80	3.65	257	E-1644-02	-
34083-2001	34083-3001	TIN	1.0mm ²	MIL-126A1	1.30	2.15	3.70	3.55	211	E-1644-00	-
34083-2002	34083-3002	TIN	0.75mm ²	MIL-126A1	1.25	2.15	3.60	3.55	142	E-1644-00	-
34083-2002	34083-3002	TIN		MIL-126A1	1.10	1.60	3.50	3.45	111	E-1644-01	-
34083-2003	34083-3003	TIN	0.50mm ²	JASO D 611(AVSS)	1.10	1.60	3.50	3.45	111	E-1644-01	-
34081-2003	34081-3003	GOLD	14	MIL-123A	1.65	2.45	3.95	3.65	268	-	7158-3033-40
			14	MIL-135A1	1.65	2.45	3.80	3.65	268	E-1644-02	-
			16	MIL-123A	1.35	2.45	3.80	3.65	222	E-1644-02	-
34081-2004	34081-3004	GOLD	18	MIL-123A	1.25	2.15	3.70	3.55	157	E-1644-00	-
				SAE J1128 (GXL)	1.25	2.15	3.90	3.55	157	E-1644-02	-
			20	MIL-123A	1.15	2.15	3.60	3.55	128	E-1644-00	-
				SAE J1128 (GXL)	1.15	2.15	3.80	3.55	128	E-1644-02	-
				MIL-123A	1.00	1.60	3.50	3.45	88	E-1644-01	-
34081-2005	34081-3005	GOLD	22	MIL-123A	1.00	1.60	3.50	3.45	88	E-1644-01	-
34081-2003	34081-3003	GOLD	2.00mm ²	JASO D 611(AVSS)	1.60	2.45	3.95	3.65	268	-	7158-3033-40
34081-2003	34081-3003	GOLD	1.50mm ²	MIL-126A1	1.40	2.45	3.80	3.65	257	E-1644-02	-
34081-2003	34081-3003	GOLD	1.0mm ²	MIL-126A1	1.30	2.15	3.70	3.55	211	E-1644-00	-
34081-2004	34081-3004	GOLD	0.75mm ²	MIL-126A1	1.25	2.15	3.60	3.55	142	E-1644-00	-
34081-2005	34081-3005	GOLD	0.50mm ²	MIL-126A1	1.10	1.60	3.50	3.45	111	E-1644-01	-
34081-2005	34081-3005	GOLD		JASO D 611(AVSS)	1.10	1.60	3.50	3.45	111	E-1644-01	-
34081-4001	34081-5001	SILVER	14	MIL-123A	1.65	2.45	3.95	3.65	268	-	7158-3033-40
			14	MIL-135A1	1.65	2.45	3.80	3.65	268	E-1644-02	-
			16	MIL-123A	1.35	2.45	3.80	3.65	222	E-1644-02	-
34081-4002	34081-5002	SILVER	18	MIL-123A	1.25	2.15	3.70	3.55	157	E-1644-00	-
				SAE J1128 (GXL)	1.25	2.15	3.90	3.55	157	E-1644-02	-
			20	MIL-123A	1.15	2.15	3.60	3.55	128	E-1644-00	-
				SAE J1128 (GXL)	1.15	2.15	3.80	3.55	128	E-1644-02	-
				MIL-123A	1.00	1.60	3.50	3.45	88	E-1644-01	-
34081-4003	34081-5003	SILVER	22	MIL-123A	1.00	1.60	3.50	3.45	88	E-1644-01	-
34081-4001	34081-5001	SILVER	2.00mm ²	JASO D 611(AVSS)	1.60	2.45	3.95	3.65	268	-	7158-3033-40
34081-4001	34081-5001	SILVER	1.50mm ²	MIL-126A1	1.40	2.45	3.80	3.65	257	E-1644-02	-
34081-4001	34081-5001	SILVER	1.0mm ²	MIL-126A1	1.30	2.15	3.70	3.55	211	E-1644-00	-
34081-4002	34081-5002	SILVER	0.75mm ²	MIL-126A1	1.25	2.15	3.60	3.55	142	E-1644-00	-
34081-4002	34081-5002	SILVER	0.50mm ²	MIL-126A1	1.10	1.60	3.50	3.45	111	E-1644-01	-
34081-4003	34081-5003	SILVER		JASO D 611(AVSS)	1.10	1.60	3.50	3.45	111	E-1644-01	-

ENTER DESCRIPTION IEC NO. 04U2010-0419 DRAWN BY K. FERGUSON CHKD BY CHLOE DHR APPR BY BMOSE REV A5	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		4 PLACES ± ---	mm INCH	DRAWN BY K. FERGUSON	DATE 4/14/2009	TITLE MX 150 RECEPTACLE CABLE SEAL	MATERIAL NO. SD-34083-002	
		3 PLACES ± ---	mm INCH	CHECKED BY A. DHR	DATE 4/14/2009		SHEET NO. 2 OF 3	
		2 PLACES ± 0.10	mm INCH	APPROVED BY B. MOSER	DATE 4/14/2009			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		ANGULAR ± 3 °		SIZE D		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

SEE TABLE 2 FOR TABLED DIMENSIONS



SUPPLIER PART NUMBER		PLATING (STAMPING)	WIRE APPLICATION		A	B	C	D	E	F	G	J	K	M	N	P	T	U	V	W	Y	AA	BB	CC	DD	EE
RIGHT PAYOFF	LEFT PAYOFF		SAE (AWG)	METRIC (mm²)	+0.3	+0.20	+0.3	+0.15	+0.01	+0.005	+0.005	+0.05	+0.01	+0.005	+0.10	+0.005	+0.03	+0.005	+0.005	+0.10	+0.01	+0.10	+0.01	+0.01	+0.01	+0.1
34083-2001	34083-3001	TIN	14	2.0	3.6	5.00	1.7	2.90	12.82	0.600	1.194	6.86	0.90	1.778	6.73	2.438	0.12	3.429	1.575	6.11	0.10	1.13	6.34	5.79	4°	5.5
			16	1.5	3.6	5.00	1.7	2.90	12.82	0.600	1.194	6.86	0.90	1.778	6.73	2.438	0.12	3.429	1.575	6.11	0.10	1.13	6.34	5.79	4°	5.5
34083-2002	34083-3002	TIN	18	1.0	3.3	5.00	1.3	2.90	12.57	0.556	0.963	7.34	0.70	1.753	6.73	2.085	0.33	3.378	1.699	1.94	0.14	0.88	-	-	-	3.8
			20	0.75	3.3	5.00	1.3	2.90	12.57	0.556	0.963	7.34	0.70	1.753	6.73	2.085	0.33	3.378	1.699	1.94	0.14	0.88	-	-	-	3.8
34083-2003	34083-3003	TIN	22	0.5	2.5	4.85	0.9	2.90	11.92	0.414	0.714	6.27	0.55	1.737	7.06	1.576	0.26	3.327	1.524	2.00	0.07	1.08	-	-	-	3.8
			14	2.0	3.6	5.00	1.7	2.90	12.82	0.600	1.194	6.86	0.90	1.778	6.73	2.438	0.12	3.429	1.575	6.11	0.10	1.13	6.34	5.79	4°	5.5
34081-2003	34081-3003	GOLD	16	1.5	3.6	5.00	1.7	2.90	12.82	0.600	1.194	6.86	0.90	1.778	6.73	2.438	0.12	3.429	1.575	6.11	0.10	1.13	6.34	5.79	4°	5.5
			18	1.0	3.3	5.00	1.3	2.90	12.57	0.556	0.963	7.34	0.70	1.753	6.73	2.085	0.33	3.378	1.699	1.94	0.14	0.88	-	-	-	3.8
34081-2004	34081-3004	GOLD	20	0.75	3.3	5.00	1.3	2.90	12.57	0.556	0.963	7.34	0.70	1.753	6.73	2.085	0.33	3.378	1.699	1.94	0.14	0.88	-	-	-	3.8
			22	0.5	2.5	4.85	0.9	2.90	11.92	0.414	0.714	6.27	0.55	1.737	7.06	1.576	0.26	3.327	1.524	2.00	0.07	1.08	-	-	-	3.8
34081-2005	34081-3005	GOLD	14	2.0	3.6	5.00	1.7	2.90	12.82	0.600	1.194	6.86	0.90	1.778	6.73	2.438	0.12	3.429	1.575	6.11	0.10	1.13	6.34	5.79	4°	5.5
			16	1.5	3.6	5.00	1.7	2.90	12.82	0.600	1.194	6.86	0.90	1.778	6.73	2.438	0.12	3.429	1.575	6.11	0.10	1.13	6.34	5.79	4°	5.5
34081-4001	34081-5001	SILVER	18	1.0	3.3	5.00	1.3	2.90	12.57	0.556	0.963	7.34	0.70	1.753	6.73	2.085	0.33	3.378	1.699	1.94	0.14	0.88	-	-	-	3.8
			20	0.75	3.3	5.00	1.3	2.90	12.57	0.556	0.963	7.34	0.70	1.753	6.73	2.085	0.33	3.378	1.699	1.94	0.14	0.88	-	-	-	3.8
34081-4002	34081-5002	SILVER	22	0.5	2.5	4.85	0.9	2.90	11.92	0.414	0.714	6.27	0.55	1.737	7.06	1.576	0.26	3.327	1.524	2.00	0.07	1.08	-	-	-	3.8
			18	1.0	3.3	5.00	1.3	2.90	12.57	0.556	0.963	7.34	0.70	1.753												

ENTER DESCRIPTION EC NO: UA/2010-04-9 DRAWN BY: CHCHIAI.DHIR CHECKED BY: CHCHIAI.DHIR APPROVED BY: 2006/04/15	QUALITY SYMBOLS $\nabla=0$ $\nabla=0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		mm	INCH	DRAWN BY	DATE	TITLE	MX 150 RECEPTACLE CABLE SEAL			
		4 PLACES $\pm$ 0.10 3 PLACES $\pm$ 0.10 2 PLACES $\pm$ 0.10 1 PLACE $\pm$ 0.3	4 PLACES $\pm$ 0.001 3 PLACES $\pm$ 0.001 2 PLACES $\pm$ 0.001 1 PLACE $\pm$ 0.003	K. PERGUSON APPROVED BY A. DHIR DATE DATE DATE DATE	4/14/2009 4/14/2009 4/14/2009 4/14/2009	4/14/2009 4/14/2009 4/14/2009 4/14/2009	MOLEX	MOLEX INCORPORATED		
		ANGULAR $\pm$ 3°		MATERIAL NO.	DOCUMENT NO.	SD-34083-002			SHEET NO. 3 OF 3	
A5	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE TABLE			SD-34083-002			SHEET NO. 3 OF 3		
NOTES: 1. DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX CORPORATION AND SHOULD NOT BE REPRODUCED OR USED WITHOUT WRITTEN PERMISSION FROM MOLEX CORPORATION.										