

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0191930015](#)
Status: **Active**
Description: VersaKrimp™ Ring Tongue Terminal for 18-22 AWG Wire

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR18689
 UL E32244

General

Product Family Ring and Spade Terminals
 Series [19193](#)
 Crimp Quality Equipment Yes
 Mil-Spec N/A
 Product Name VersaKrimp™
 Type Ring

Physical


Barrel Type Closed - Brazed
 Insulation None
 Material - Plating Mating Tin
 Packaging Type Adhesive Tape on Reel
 Stud Size 8 (M4)
 Wire Size AWG 18, 20, 22
 Wire Size mm² 0.35 - 0.80

Material Info

Old Part Number AA-321-08T

Reference - Drawing Numbers

Sales Drawing AACD30101

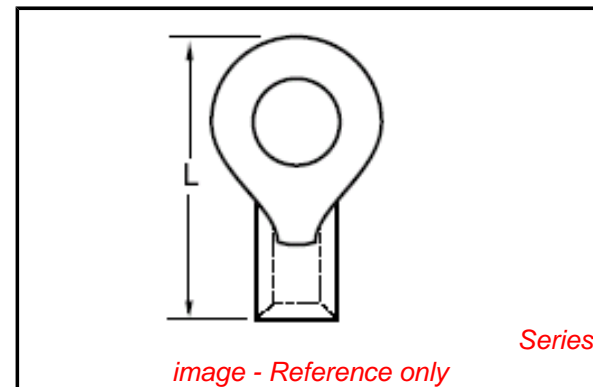

EU RoHS

ELV and RoHS Compliant
REACH SVHC Contains SVHC: No
Halogen-Free Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[19193Series](#)


Application Tooling | [FAQ](#)

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
ATP Tooling Kit for ATP-100 and ATP-300 Series Air Crimping Press for Mylar Tape Mounted Terminals	0190270034
Mini-Mac™ Applicator	0638853800

- NOTES:**
- ① MAT'L: COPPER
PLATING: ELECTRO-TIN (.0003 MIN.)
 - ② BRAZED SEAM

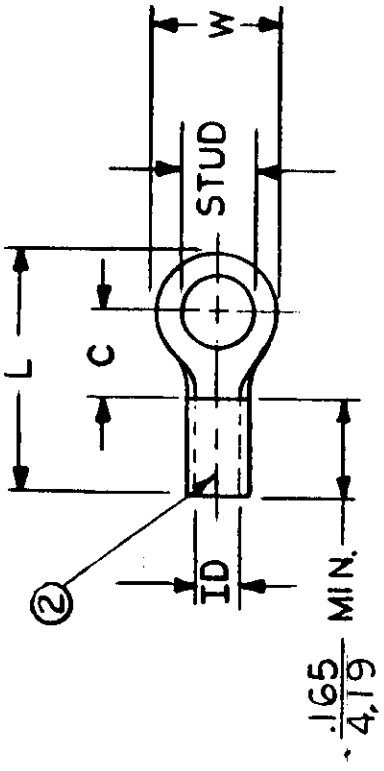

STUD SIZES: (±.005)

- 02 = .094
- 04 = .119
- 06 = .146
- 08 = .173
- 10 = .198
- 14 = .265
- 56 = .328
- 38 = .390
- 209 = .209

"UL" LISTING *E32244
"CSA" LISTING *18689

WIRE SIZE: 22-18 AWG
25-1.5 MM²

ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$

PART NUMBER	"W"		"C"		"L"		"ID"		AVAILABLE STUD SIZES	STOCK THICKNESS
	±.010	MIN.	MIN.	MAX.	MAX.	MIN.	MIN.			
AA-320-	.225 5.72	.157 3.99	.484 12.29	.062 1.57			02, 04, 06	.028 ^{±.001} .71		
AA-321-	.312 7.93	.270 6.86	.641 16.28	.062 1.57			06, 08, 10, 209	.028 ^{±.001} .71		
AA-322-	.467 11.86	.386 9.80	.835 21.21	.062 1.57			10, 14, 56	.028 ^{±.001} .71		
AA-326-	.534 13.56	.552 14.02	1.034 26.26	.054 1.37			10, 14, 56, 38	.031 ^{±.001} .79		
AA-332-	.254 6.45	.240 6.10	.582 14.78	.062 1.57			04, 06, 08	.028 ^{±.001} .71		

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED		REFERENCE	SCALE:	NTS	DATE	TITLE:
FRAC.	DEC.	ANG.			11-27-84	RING TONGUE TERMINAL
±	±	±			11-30-84	VERSAKRIMP 300-SERIES

EIC ^{mo} lex ^o INCORPORATED	
DWG. NO. A	CUSTOMER DWG.