


MECHANICAL DATA

Dimensions in mm(inches)

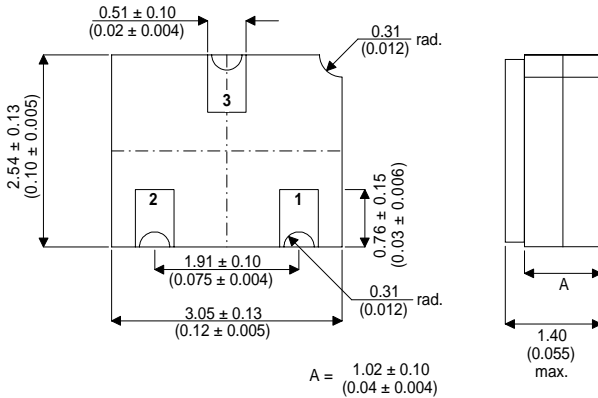

SOT23 CERAMIC (LCC1 PACKAGE)

Underside View

Pad 1 – Anode Pad 2 – N/C Pad 3 – Cathode

VOLTAGE REGULATOR DIODE IN A CERAMIC SURFACE MOUNT PACKAGE FOR HI-REL APPLICATIONS

FEATURES

- HERMETIC CERAMIC SURFACE MOUNT PACKAGE (SOT23 COMPATIBLE)
- VOLTAGE RANGE 2.4 TO 100V

ABSOLUTE MAXIMUM RATINGS

| | | | |
|-------------------|--|-------------------------|---------------|
| P_{TOT} | Power Dissipation | $T_{AMB} = 25^{\circ}C$ | 500mW |
| | Derate above 25°C | | 4mW/°C |
| T_J | Maximum Junction Temperature | | -65 to +200°C |
| T_{STG} | Storage Temperature Range | | -65 to +200°C |
| T_{SOL} | Soldering Temperature | (5 seconds max.) | 230°C |
| $R_{\theta JA}$ | Thermal Resistance Junction to Ambient | | 336°C/W |
| $R_{\theta J-MB}$ | Thermal Resistance Junction to Mounting Base | | 140°C/W |

ELECTRICAL CHARACTERISTICS ($T_A = 25^{\circ}C$ unless otherwise stated)

| Parameter | Test Conditions | Min. | Typ. | Max. | Units |
|--|--|------------|------------|------------|----------|
| V_Z Zener Voltage | For V_Z nom. $\leq 24V$, $I_Z = 5mA$ | V_Z min. | V_Z nom. | V_Z max. | V |
| | For V_Z nom. $\geq 27V$, $I_Z = 2mA$ | | | | |
| I_R Reverse Current | $V_R = V_R$ test | | | I_R max. | μA |
| | $V_R = V_R$ test $T_{AMB} = 150^{\circ}C$ | | | I_R max | |
| Z_Z Small Signal Breakdown Impedance | $I_Z = I_Z$ test | | | Z_Z max. | Ω |
| Z_Z Small Signal Breakdown Impedance near breakdown knee | For V_Z nom. $\leq 24V$, $I_{ZK} = 1mA$ | | | Z_K max. | Ω |
| | For V_Z nom. $\geq 27V$, $I_{ZK} = 0.5mA$ | | | | |

See table 1 for type variants and test parameters.

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

TABLE 1 – TYPE VARIANTS & TEST PARAMETERS

| Product | V _Z nom. (V) | V _Z min. (V) | V _Z max. (V) | I _Z max. (mA) | Z _Z max. (Ω) | V _R test (V) | I _R max. (μA) (25°C) | R _{ZK} max/I _{ZK} max (Ω) | I _{ZK} max (mA) |
|-----------|----------------------------|----------------------------|----------------------------|-----------------------------|----------------------------|----------------------------|---------------------------------------|--|-----------------------------|
| BZX79C2V4 | 2.4 | 2.2 | 2.6 | 155 | 100 | 1.0 | 50 | 600 | 1.0 |
| BZX79C2V7 | 2.7 | 2.5 | 2.9 | 135 | 100 | 1.0 | 20 | 600 | 1.0 |
| BZX79C3V0 | 3.0 | 2.8 | 3.2 | 125 | 95 | 1.0 | 10 | 600 | 1.0 |
| BZX79C3V3 | 3.3 | 3.1 | 3.5 | 115 | 95 | 1.0 | 5.0 | 600 | 1.0 |
| BZX79C3V6 | 3.6 | 3.4 | 3.8 | 105 | 90 | 1.0 | 5.0 | 600 | 1.0 |
| BZX79C3V9 | 3.9 | 3.7 | 4.1 | 95 | 90 | 1.0 | 3.0 | 600 | 1.0 |
| BZX79C4V3 | 4.3 | 4.0 | 4.6 | 90 | 90 | 1.0 | 3.0 | 600 | 1.0 |
| BZX79C4V7 | 4.7 | 4.4 | 5.0 | 85 | 80 | 2.0 | 3.0 | 500 | 1.0 |
| BZX79C5V1 | 5.1 | 4.8 | 5.4 | 80 | 60 | 2.0 | 2.0 | 480 | 1.0 |
| BZX79C5V6 | 5.6 | 5.2 | 6.0 | 70 | 40 | 2.0 | 1.0 | 400 | 1.0 |
| BZX79C6V2 | 6.2 | 5.8 | 6.6 | 64 | 10 | 4.0 | 3.0 | 150 | 1.0 |
| BZX79C6V8 | 6.8 | 6.4 | 7.2 | 58 | 15 | 4.0 | 2.0 | 80 | 1.0 |
| BZX79C7V5 | 7.5 | 7.0 | 7.9 | 53 | 15 | 5.0 | 1.0 | 80 | 1.0 |
| BZX79C8V2 | 8.2 | 7.7 | 8.7 | 47 | 15 | 5.0 | 0.7 | 80 | 1.0 |
| BZX79C9V1 | 9.1 | 8.5 | 9.6 | 43 | 15 | 6.0 | 0.5 | 100 | 1.0 |
| BZX79C10 | 10 | 9.4 | 10.6 | 40 | 20 | 7.0 | 0.2 | 150 | 1.0 |
| BZX79C11 | 11 | 10.4 | 11.6 | 36 | 20 | 8.0 | 0.1 | 150 | 1.0 |
| BZX79C12 | 12 | 11.4 | 12.7 | 32 | 25 | 8.0 | 0.1 | 150 | 1.0 |
| BZX79C13 | 13 | 12.4 | 14.1 | 29 | 30 | 8.0 | 0.1 | 170 | 1.0 |
| BZX79C15 | 15 | 13.8 | 15.6 | 27 | 30 | 10 | 0.05 | 200 | 1.0 |
| BZX79C16 | 16 | 15.3 | 17.1 | 24 | 40 | 11 | 0.05 | 200 | 1.0 |
| BZX79C18 | 18 | 16.8 | 19.1 | 21 | 45 | 13 | 0.05 | 225 | 1.0 |
| BZX79C20 | 20 | 18.8 | 21.2 | 20 | 55 | 14 | 0.05 | 225 | 1.0 |
| BZX79C22 | 22 | 20.8 | 23.3 | 18 | 55 | 15 | 0.05 | 250 | 1.0 |
| BZX79C24 | 24 | 22.8 | 25.6 | 16 | 70 | 17 | 0.05 | 250 | 1.0 |
| BZX79C27 | 27 | 25.1 | 28.9 | 14 | 80 | 19 | 0.05 | 300 | 0.5 |
| BZX79C30 | 30 | 28 | 32 | 13 | 80 | 21 | 0.05 | 300 | 0.5 |
| BZX79C33 | 33 | 31 | 35 | 12 | 80 | 23 | 0.05 | 325 | 0.5 |
| BZX79C36 | 36 | 34 | 38 | 11 | 90 | 25 | 0.05 | 350 | 0.5 |
| BZX79C39 | 39 | 37 | 41 | 10 | 130 | 27 | 0.05 | 350 | 0.5 |
| BZX79C43 | 43 | 40 | 46 | 9.2 | 150 | 29 | 0.05 | 375 | 0.5 |
| BZX79C47 | 47 | 44 | 50 | 8.5 | 170 | 33 | 0.05 | 375 | 0.5 |
| BZX79C51 | 51 | 48 | 54 | 7.8 | 180 | 36 | 0.05 | 400 | 0.5 |
| BZX79C56 | 56 | 52 | 60 | 7.0 | 200 | 39 | 0.05 | 425 | 0.5 |
| BZX79C62 | 62 | 58 | 66 | 6.4 | 215 | 43 | 0.05 | 450 | 0.5 |
| BZX79C68 | 68 | 64 | 72 | 5.9 | 240 | 48 | 0.05 | 475 | 0.5 |
| BZX79C75 | 75 | 70 | 79 | 5.3 | 255 | 52 | 0.05 | 500 | 0.5 |
| BZX79C82 | 82 | 77 | 87 | 4.9 | 280 | 62 | 0.05 | 525 | 0.5 |
| BZX79C91 | 91 | 85 | 96 | 4.4 | 300 | 69 | 0.05 | 550 | 0.5 |
| BZX79C100 | 100 | 94 | 106 | 4.0 | 500 | 76 | 0.05 | 600 | 0.5 |

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.