



Carrier adaptor; 2 piece pluggable adaptor, PLCC ZIF socket with test probes to surface mountable PLCC emulator foot.

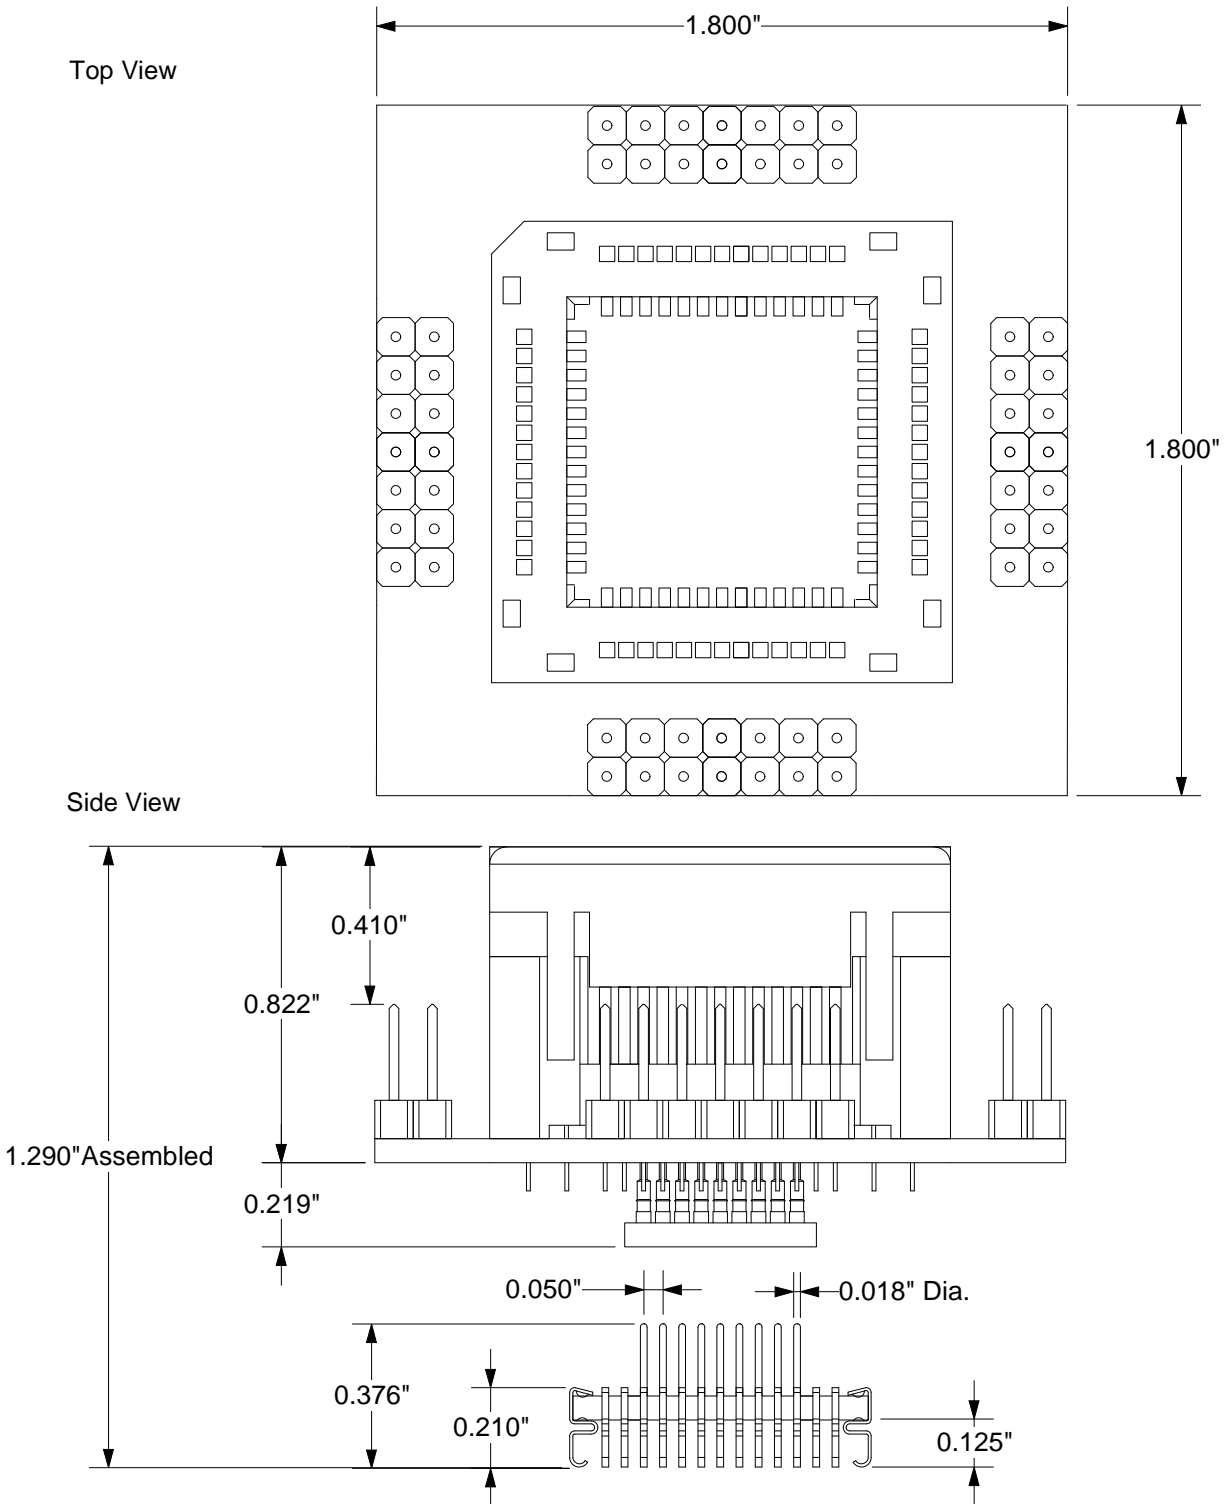

Substrate: FR4/G10, 0.0625"±0.007" thick.
 PLCC Socket Pins: Phosphor Bronze, finish: 150 μm Tin/lead (93/7) over 40μm Nickel

	CA-PLCC052-Z-J-T-01 Dwg	Status: Released	Scale: 2:1	Rev: C
	© 1994 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com	Drawing: M. Lund		Date: 8/17/94
		File: CA-PLCC052-Z-J-T-01 Dwg		ECO#