



1. Mechanical Dimensions:

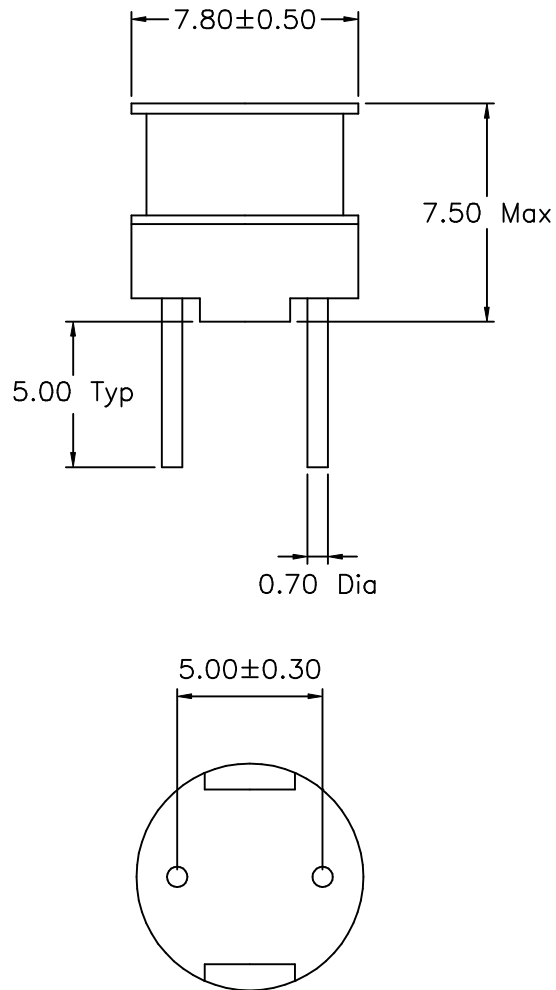

2. Schematic:



3. Electrical Specifications:

INDUCTANCE: $10\mu\text{H} \pm 20\%$ @1KHz

IDC: 2.90A Max

DC RESISTANCE: 0.050 Ohms Max

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: $> 28\%$,
4. Temperature rating: 155°C . UL file E151556,
5. Operating Temperature Range: -30°C to $+100^\circ\text{C}$

Doc. Rev. A/1

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION	XFMRS Inc.		Title: Power Inductor	
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ± 0.25 Dimensions in MM	P/N: XFRCRH875-100M		REV. A
		DWN.	廖玉坤	Feb-15-01
		CHK.	李清儿	Feb-15-01
	SHEET 1 OF 1	APP.	Isaiah M	Feb-15-01