


SoniCrest Electro-Magnetic Sound Generators


HCM26AX Series

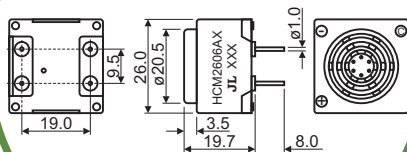


Dimension

Unit : mm
Tolerance : ± 0.3 mm


Coupled Circuit

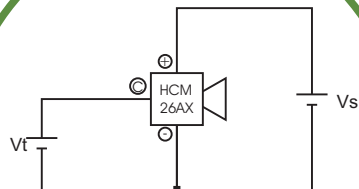

HCM2606AX



HCM2612AX



Characteristics Response

Measuring Temperature : 25°C
Measuring Distance : 10cm

Specification (all data taken at 25°C unless otherwise specified)

Model	Rated Voltage (VDC)	Operating Voltage (VDC)	★Rated Current (mA)	★Sound Output at 10cm (dB)	★Generated Frequency (Hz)	Operating Temperature (°C)	Storage Temperature (°C)	Weight (g)
HCM2606AX	6	4 ~ 8	≤ 35	≥ 95	300 ~ 500	-40 ~ +70	-40 ~ +80	17
HCM2612AX	12	8 ~ 16	≤ 35	≥ 95	300 ~ 500	-40 ~ +70	-40 ~ +80	17

★ Value Applying Rated Voltage, DC