


VTO-P9-H-6p

SMD VC-TCXO
HCMOS


QuartzCom
the communications company



Features

- Applications: telecoms infrastructure, broadband access
- Output signal HCMOS
- Wide frequency range up to 200 MHz
- Low phase jitter < 1.0 ps


Parameter	Specification	
	VTO-P9-3H-6p	VTO-P9-5H-6p
Frequency range	5 ~ 200 MHz	
Standard frequencies	10.000, 19.440, 20.000, 24.000, 32.768 & 52.000 MHz	
Frequency stability:		
vs. temperature	≤ ±0.5 ~ ± 2.5 ppm	
vs. supply & load change	≤ ±0.3 ppm	± 5 %
vs. aging	≤ ±1.0 ppm	1 st year
Frequency tolerance ex. factory	≤ ±0.5 ppm	@ +25 °C
Supply voltage	+3.3 V ±5 %	+5.0 V ±5 %
Supply current	4 ~ 15 mA	
Output signal	HCMOS	
Output load	15 pF	
Frequency pulling range	±5 ~ ±10 ppm	
Voltage control	+1.65 V ±1.35 V	+2.5 V ±2.0 V
Jitter (RMS)	< 1 ps @ 12 kHz ~ 20 MHz from carrier frequency	
Operating temperature range	-20 ~ +70 °C	commercial application
	-40 ~ +85 °C	industrial application
Storage temperature range	-55 ~ +125 °C	
Packaging units	tape & reel	500 pieces
Customer specifications on request		

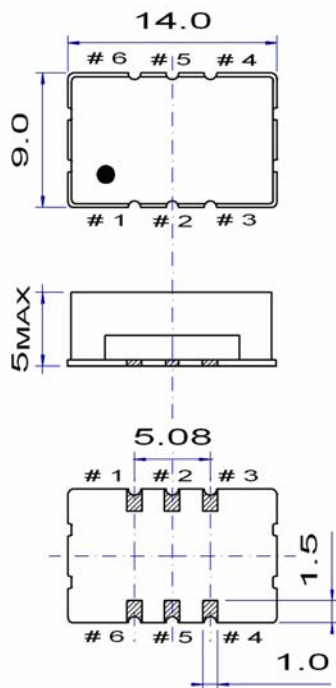

Pin function


- # 1 Vc Voltage control
- # 2 N.C.
- # 3 GND
- # 4 Output
- # 5 N.C.
- # 6 Vdc

Example for solder pattern



Do not design any conductive path between the pattern

Example for IR reflow soldering temperature

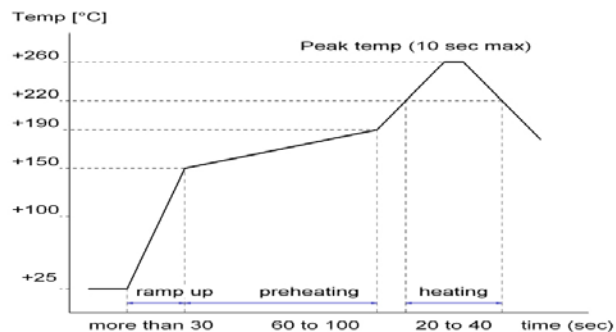

2002/95/EC RoHS compliant

02 May. 10

QuartzCom AG
sales@quartzcom.com

QuartzCom Asia
sales-asia@quartzcom.com

QuartzCom USA
sales-usa@quartzcom.com

www.quartzcom.com

