



1. Mechanical Dimensions:

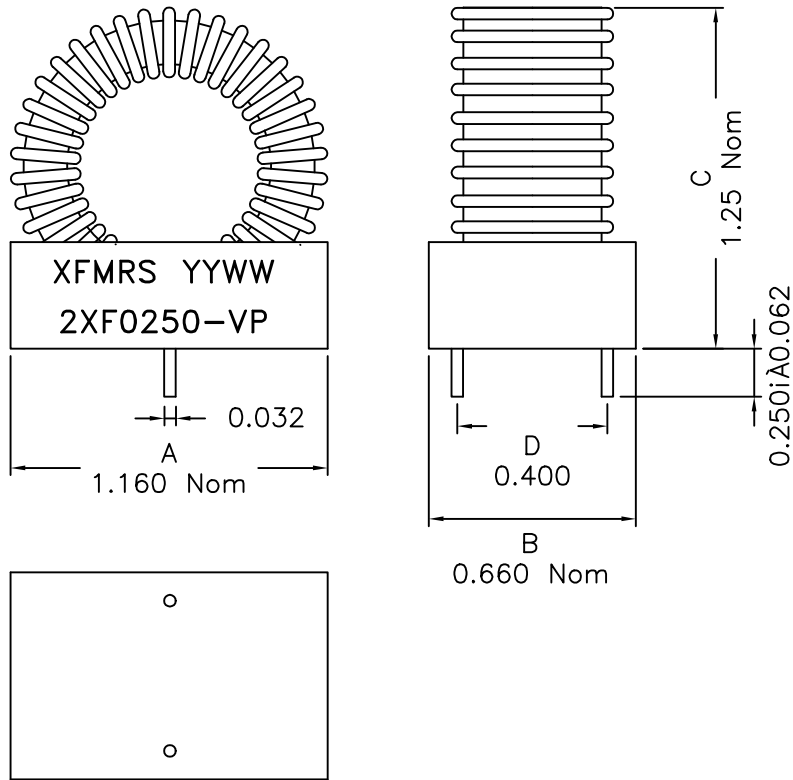

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C

2. Schematic:



3. Electrical Specifications: @25°C

ACL: 250uH±10% @1.0KHz 1.0V

Current Rating: 2.0ADC Maximum 15% drop in ACL

DC Resistance: 0.090hms Maximum

DOC. REV A/2

XFMRS Inc	Title: TOROIDAL INDUCTOR			
	UNLESS OTHERWISE SPECIFIED		P/N: 2XF0250-VP	REV A
TOLERANCES:		DWN.	李小锋	JUN-05-01
.xxx ±0.010		CHK.	廖玉坤	JUN-05-01
Dimensions in INCH		APP.	BW	JUN-05-01
SHEET 1 OF 1				