

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0877601617](#)
Status: **Active**
Overview: [milligrid](#)
Description: 2.00mm (.079") Pitch Milli-Grid™ Header, Right Angle, Through Hole, 16 Circuits, 0.76μm (30μ") Gold (Au) Selective Plating, Tray, Lead-free

Documents:

3D Model	Product Specification PS-87761-100 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification


CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	87760
Application	Board-to-Board, Wire-to-Board
Comments	Lead-free version of 87049 series
Overview	milligrid
Product Name	Milli-Grid™

Physical

Breakaway	No
Circuits (Loaded)	16
Circuits (maximum)	16
Color - Resin	Black
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Mated Height (in)	0.157 In
Mated Height (mm)	4.00 mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Number of Rows	2
Orientation	Right Angle
PC Tail Length (in)	0.102 In
PC Tail Length (mm)	2.60 mm
PCB Locator	No
PCB Retention	None
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Tray
Pitch - Mating Interface (in)	0.079 In
Pitch - Mating Interface (mm)	2.00 mm
Pitch - Term. Interface (in)	0.079 In
Pitch - Term. Interface (mm)	2.00 mm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	Yes

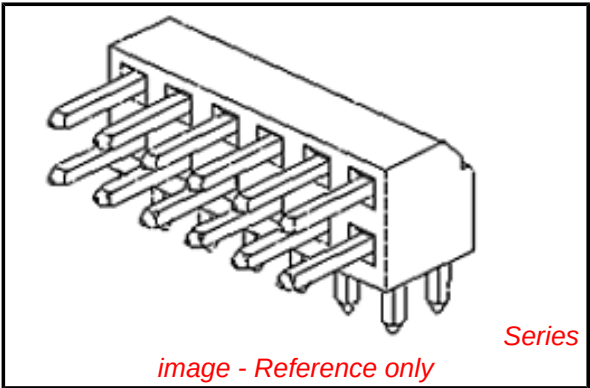

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[87760Series](#)


Mates With
[79107](#) Milli-Grid™ Receptacle, Vertical,
Through Hole. [79108](#) Milli-Grid™ Flex-to-
Board, Vertical Receptacle. Milli-Grid™
Receptacle, Surface Mount. [79109](#). [87381](#)

Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55°C to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	2A
Voltage - Maximum	125V
Solder Process Data	
Lead-free Process Capability	Wave Capable (TH only)
Material Info	
Reference - Drawing Numbers	
Product Specification	PS-87761-100
Sales Drawing	SD-87760-109



This document was generated on 05/26/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION


10 9 8 7 6 5 4 3 2 1

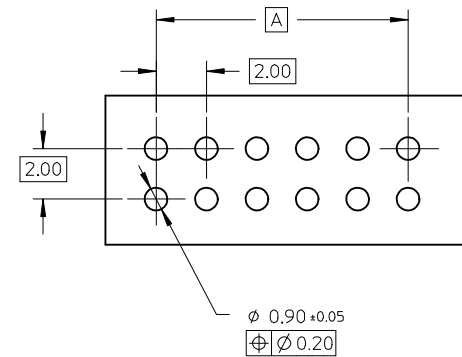

RECOMMENDED PCB LAYOUT

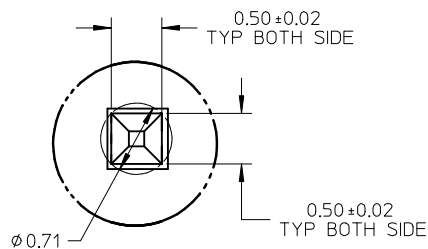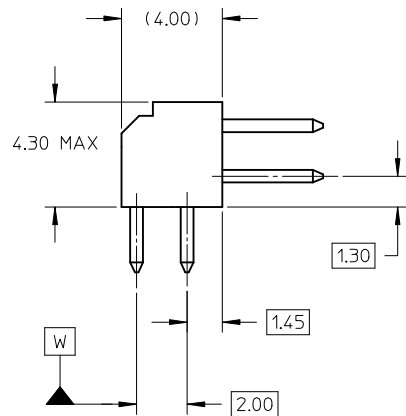

DETAIL Z

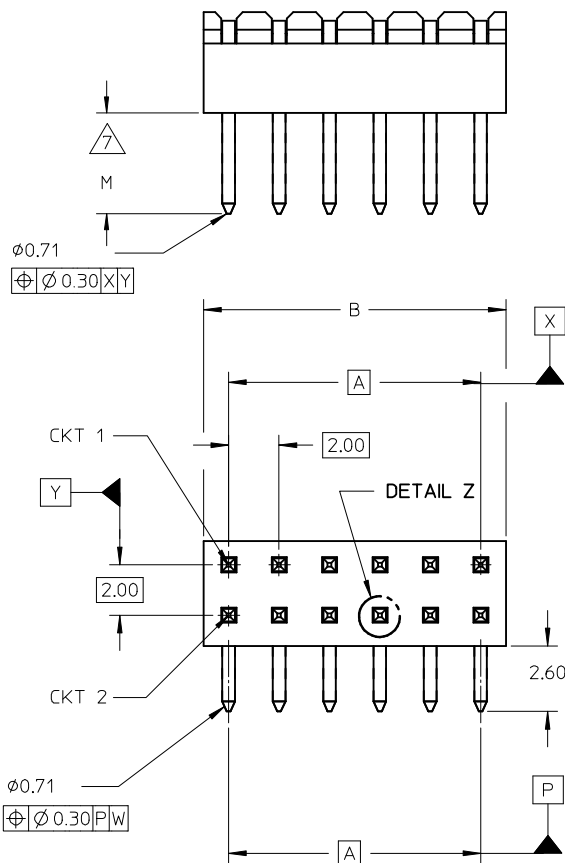

NOTES:

1. MATERIAL:

HSG: PCT, 30% GLASS FILLED, UL 94V-0, COLOUR BLACK.

PIN: 0.50MM SQ PHOSPHOR BRONZE 510

2. PLATING:

***6 - 0.38um MIN GOLD IN CONTACT AREA,
1.90um MIN TIN IN SOLDER TAIL AREA, BOTH OVER
1.27um MIN NICKEL OVERALL

***7 - 0.76um MIN GOLD IN CONTACT AREA,
1.90um MIN TIN IN SOLDER TAIL AREA, BOTH OVER
1.27um MIN NICKEL OVERALL

***8 - 2.54um MIN TIN OVER
1.27um MIN NICKEL OVERALL

3. 12 CKT USED FOR ILLUSTRATION ONLY

4. PART TO BE PACKED IN POCKET TRAY/TUBE (SEE TABLE).

5. PRODUCT SPEC PS-87761-100 APPLIES.

6. RECOMMENDED PCB BOARD THK 1.60 ± 0.10 MM.


7. MATING LENGTH:


1 -	4.00MM
2 -	3.50MM
3 -	3.06MM
4 -	5.75MM

LEGEND:

87760 - * * * *
(SEE SHT 3) ——— PLATING OPTION (SEE NOTE 2)
————— MATING OPTION

0047-DW-SIRIUS EC NO: S2010-0177 DRWN:SKANG CHKD:ATSEE APPR:MLONG REV A11	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
					DRAWN BY KSEE	DATE 2003/10/15	TITLE MGRID, 2MM DUAL ROW HDR. R/A			
					CHECKED BY KCLING	DATE 2003/12/02				
					APPROVED BY SKTOH	DATE 2003/12/11	MOLEX INCORPORATED			
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					
					SEE TABLE					
					SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

	10	9	8	7	6	5	4	3	2	1		
	PART NUMBER	VOID PIN LOCATION	CKT SIZE	A	B	M	PACKAGING TYPE					
F	87760-04**	-	04	2.00	4.00	REFER TO NOTE 7.	TRAY	 PART IN TUBE				F
	87760-06**	-	06	4.00	6.00							
	87760-08**	-	08	6.00	8.00							
	87760-10**	-	10	8.00	10.00							
E	87760-12**	-	12	10.00	12.00							
	87760-14**	-	14	12.00	14.00							
	87760-16**	-	16	14.00	16.00							
	87760-18**	-	18	16.00	18.00							
D	87760-20**	-	20	18.00	20.00							
	87760-22**	-	22	20.00	22.00							
	87760-24**	-	24	22.00	24.00							
	87760-26**	-	26	24.00	26.00							
C	87760-28**	-	28	26.00	28.00							
	87760-30**	-	30	28.00	30.00							
	87760-32**	-	32	30.00	32.00							
	87760-34**	-	34	32.00	34.00							
B	87760-36**	-	36	34.00	36.00							
	87760-38**	-	38	36.00	38.00							
	87760-40**	-	40	38.00	40.00							
	87760-42**	-	42	40.00	42.00							
	87760-44**	-	44	42.00	44.00							
	87760-46**	-	46	44.00	46.00							
	87760-48**	-	48	46.00	48.00							
	87760-50**	-	50	48.00	50.00							
	87760-5116	5, 6 & 26	50	48.00	50.00							
	87760-5248	-	28	26.00	28.00	TUBE						



PART IN TUBE

0047-DW-SIRIUS EC NO: S2010-0177 DRWN:SKANG 2009/10/21 CHKD:ATSEE 2009/10/22 APPR:MLONG 2009/10/23	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		DESCRIPTION REV	4 PLACES 3 PLACES 2 PLACES 1 PLACE	mm INCH	DRAWN BY KSEE CHECKED BY KCLING APPROVED BY SKTOH MATERIAL NO. SEE TABLE	DATE 2003/10/15 2003/12/02 2003/12/11	TITLE MGRID, 2MM DUAL ROW HDR. R/A MOLEX INCORPORATED	DOCUMENT NO. SD-87760-109	SHEET NO. 2 OF 2