

LX Series

7304/7204 Sensor Manager

The 7304/7204 Sensor Managers from MRV Communications is a four-slot modular, expandable, high-density sensor concentrator engineered to address the needs of telecommunications network service providers, utilities and corporate enterprise facilities. At unstaffed facilities that require lights-out management, the Sensor Managers can be used to alert technical staff to a door opening, power outages, or fuel levels in a back-up power generator or many other uses.

The 7304/7204 Sensor Managers supports up to 4 modules that provide a variety of sensor input and control options. Available modules provide 32 port sensor inputs, 8 port control outputs, or 8 port analog loops. The 7304/7204 is ideally suited for facilities that employ environmental, power, pressure and fluid or security alarms.

The 7304 Sensor Manager is a standalone unit with an integrated LX Series Console Server, providing access through an Ethernet/IP network, a serial connection or a V92 modem. The 7204 Sensor Manager is managed through a separate LX Series Console Server. This distributed architecture allows the LX Series Console Server and 7204 Sensor Manager to manage up to 512 sensor points using a single IP address.

The LX Series Console Servers provide remote service port access and remote power management of other network elements. Security features include SSHv2, SSL, PPP, RADIUS, TACACS+, SecurID. The sophisticated Trigger/Action feature allows automation, with the ability to define an event trigger and follow on actions, including flexible, automated notification via e-mail, SMS, TAP, or SNMP traps.

This MRV solution supports an easy to use browser based GUI, powerful CLI, or SNMP based management. The SNMP based Megavision management platform also provides an fault management system capabilities that provide administrators with the additional tools to quickly identify, manage, prioritize and resolve sensor events and fault conditions.




Applications

- Utilities
- Telco central office and remote facilities
- Wireless cellular sites
- Manufacturing facilities

Benefits

- High density IP based sensor platform eliminates multi-box solutions
- Wet, dry and 20 ma analog sensor inputs and control output meet wide range of needs
- Rapid return on investment from reduced site visits
- Integrated console server with Ethernet connectivity, serial port, and v.92 modem (7304 Sensor Manager only)
- Single management interface for sensor network, console/terminal servers and power control
- Industry leading security features, including SSHv2, SNMPv3, RADIUS, SecurID, TACACS+ and more

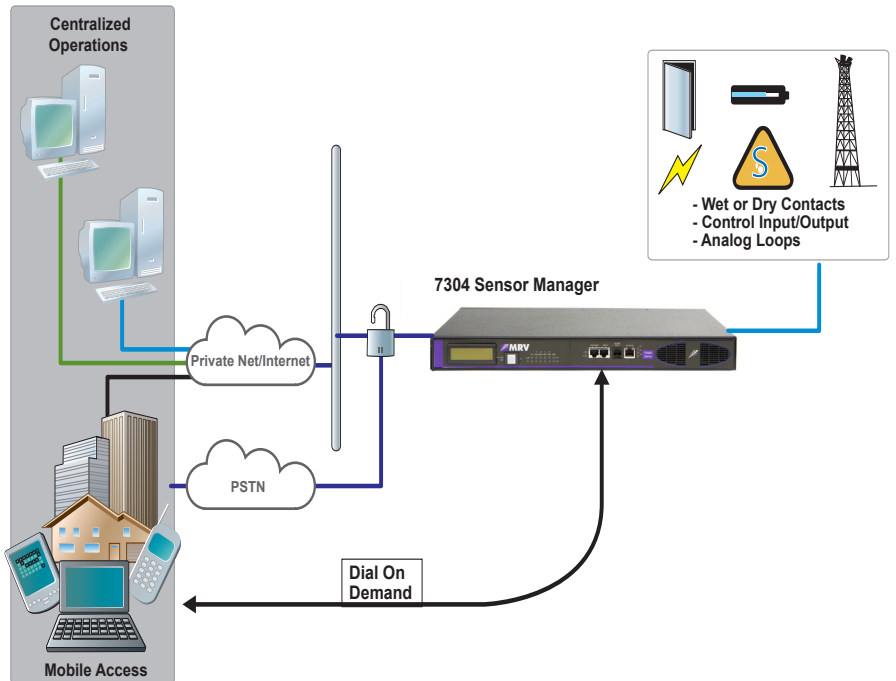

Datasheet

| Specifications | | Ordering Information | |
|-----------------------|---|----------------------|-------------------------------------|
| System Features | 19" or 23" 1U rack unit Up to 4 modules per 7304/7204 Up to 4 7204 Sensor Managers per LX Series LCD alarm status display Audible alarm | LX-7304T-102AC | 7304 Sensor Manager, dual AC, modem |
| Power Requirements | Dual AC power supplies, 120-240VAC, 50/60Hz, .5 amps Dual 36-72VDC power supplies, .75 amps | LX-7304T-112DC | 7304 Sensor Manager, dual DC, modem |
| Physical Dimensions | Height: 4.48 cm/1.75 in Width 44.8 cm/17.48 in Depth: 29.21 cm/11.5 in Physical Weight: 3.64 kg/8.02 lbs | LX-7204T-002AC | 7204 Sensor Manager, dual AC |
| Serial Ports | 1 LX Series console port, RS232 (7304 only) 1 Management port, RS232 (7304 only) 1 Uplink port, RS232 (7204 only) | LX-7204T-012DC | 7204 Sensor Manager, dual DC |
| Ethernet | 10/100 Ethernet (7304 only) | LX-7200-001 | 32 Port Alarm Input Module |
| Modem | V.92 (7304 only) | LX-7200-002 | 8 Port Control Output Module |
| Operating Temperature | 23 to 131°F (-5 to 55°C) Short Term (DC Units Only) | LX-7200-003 | 8 Port Analog Loop Module |
| Storage Temperature | -40 to 185°F (-20 to 85°C) | | |
| Humidity | 5% to 85% Long Term; 5% to 90% Short Term(DC Units Only) | | |
| Warranty | Three Year | | |
| Alarm Input Module | 32 dry or wet contacts 3.5V to 75VDC 96 pi | | |
| Control Output Module | 8 control outputs Screw-type terminal connector Max switching DC 30V @ 1.0A, 30W | | |
| Analog Loop Module | 8 analog loop inputs Supports 4-20 ma loop powered sensors Screw-type terminal connector | | |
| Certifications | FCC Part 15, Class A; EN 300-386 V1.3.3 (2005-04); ICES-03 ISSUE 4; AS/NZ CISPR 22:2004 NEBS Level 3 (DC only) RoHS compliant | | |
| Warranty | Three years | | |



LX-7304T-112DC



LX-7200-001



LX-7200-002



LX-7200-003

MRV has more than 50 offices throughout the world. Addresses, phone numbers, and fax numbers are listed at www.mrv.com. Please e-mail us at sales@mr.v.com or call us for assistance.

MRV (West Coast USA)
20415 Nordhoff St.
Chatsworth, CA 91311
800-338-5316
818-773-0900

MRV (East Coast USA)
295 Foster St.
Littleton, MA 01460
800-338-5316
978-952-4700

MRV (International)
Business Park Moerfelden
Waldeckerstrasse 13
64546 Moerfelden-Walldorf
Germany
Tel. (49) 6105/2070
Fax. (49) 6105/207-100

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. Please contact MRV Communications for more information. MRV Communications and the MRV Communications logo are trademarks of MRV Communications, Inc. Other trademarks are the property of their respective holders.

Revision C

sales@mr.v.com