



SMT Power Transformers

For Analog Devices ADM2485
Isolated RS-485 Transceiver



- Developed specifically for Analog Devices ADM2485 Isolated RS-485 Transceiver for stepping up 5 V or 3.3 V to 6 V.
- Center tapped primary and secondary windings
- 2500 Vrms interwinding isolation.

Core material Ferrite

Terminations RoHS tin-silver over tin over nickel over phos bronze. Other terminations available at additional cost.

Weight 0.94 – 1.0 g

Ambient temperature –40°C to +125°C

Storage temperature Component: –40°C to +125°C.
Packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)
38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 600/13" reel Plastic tape: 24 mm wide, 0.37 mm thick, 16 mm pocket spacing, 6.1 mm pocket depth

PCB washing Only pure water or alcohol recommended

Part number ¹	Pri/sec voltage	Inductance ² min (µH)	DCR max (Ohms) ³		Leakage inductance ⁴ max (µH)	Volt-time product ⁵ (V-µsec)	Power ⁶ (W)	Turns ratio pri : sec
			pri	sec				
DA2303-AL_	5 V to 6 V	45.6	0.130	0.260	1.0	34.4	7.2	1 : 1.5
DA2304-AL_	3.3 V to 6 V	17.8	0.086	0.232	0.43	21.5	7.2	1 : 2.2

1. When ordering, please specify **termination** and **packaging** codes:


DA2303-AL D

Termination: **L** = RoHS compliant tin-silver over tin over nickel over phos bronze.
Special order: **T** = RoHS tin-silver-copper (95.5/4/0.5) or **S** = non-RoHS tin-lead (63/37).

Packaging: **D** = 13" machine ready reel. EIA-481 embossed plastic tape (600 per full reel).

B = Less than full reel. In tape, but not machine ready.
To have a leader and trailer added (\$25 charge), use code letter D instead.

- Inductance is tested between pins 4 and 3 at 500 kHz, 0.5 Vrms, 0 Adc.
 - DCR is per winding.
 - Leakage inductance is for the primary with both windings connected in series and with the secondary windings shorted.
 - Based on Bs at of the core at 25°C and number of turns on winding 4-3.
 - Calculated output power based on 150 kHz operating frequency. Power varies depending on application.
 - Operating temperature range –40°C to +85°C.
 - Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

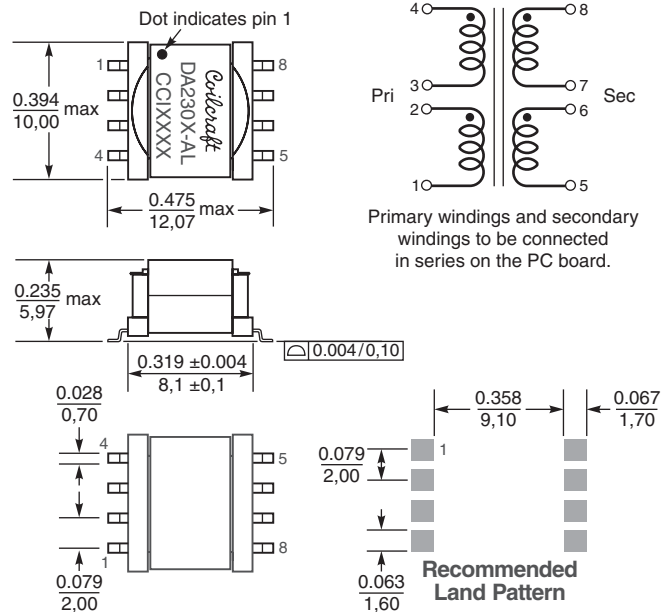

Dimensions are in $\frac{\text{inches}}{\text{mm}}$

Coilcraft[®]

Specifications subject to change without notice.
Please check our website for latest information.

Document 550 Revised 01/05/09

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>