

MECHANICAL DATA

Maximum Overall Length	2-5/16 Inches
Maximum Overall Diameter	1.005 Inches

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to Plate	1.40 μmf Max.	0.90 μmf Min.
Grid to Cathode	2.40 μmf Max.	1.10 μmf Min.
Plate to Cathode	0.020 μmf Max.	

RATINGS

Heater Voltage ($\pm 10\%$)	6.3 Volts
Heater Current	375 to 425 Ma
Plate Voltage	200 Volts Max.
Plate Current	20 Ma Max.
Grid Current	1.5 μa Max.
Transconductance	7500 μmhos Min.
Noise Factor	12.5 db Max.
Power Gain	12 db Min.
Tube Seal Temperature	175° C Max.

www.DataSheet4U.com

TYPICAL OPERATING CONDITIONS


Plate Voltage	150 Volts
Plate Current	10 Ma
Transconductance	8000 μmhos
Amplification Factor	70
Cathode Resistor	100 Ohms
Noise Factor ¹	10.5 db
Power Gain ¹	14 db

NOTE:

1. Measured at 890 MC.

QUICK REFERENCE DATA

The Sylvania 6BA4 is a uhf amplifier of planar construction designed for use at uhf frequencies such as the new television channels. This tube is particularly outstanding for its high gain and low noise which may make it possible to extend the uhf television receiver range.

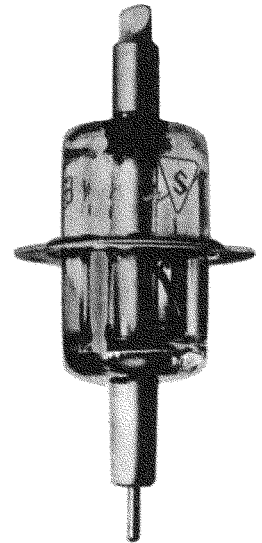

SYLVANIA ELECTRIC PRODUCTS INC.
ELECTRONICS DIVISION
WOBURN, MASS.

Prepared and Released By The
TECHNICAL PUBLICATIONS SECTION
EMPORIUM, PENNSYLVANIA

6BA4

