

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0877540552](#)
Status: **Active**
Description: 2.00mm (.079") Pitch Header, Breakaway, Right Angle, Through Hole, Vertical, 5 Circuits, 0.38µm (15µ") Gold (Au) Plating, Tray Packaging, Lead-free

Documents:


[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	PCB Headers
Series	87754
Application	Board-to-Board
Product Name	N/A

Physical

Breakaway	Yes
Circuits (Loaded)	5
Circuits (maximum)	5
Color - Resin	Black
First Mate / Last Break	No
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Mated Height (in)	0.157 In
Mated Height (mm)	4.00 mm
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Nylon
Number of Rows	1
Orientation	Right Angle
PC Tail Length (in)	0.102 In
PC Tail Length (mm)	2.60 mm
PCB Locator	No
PCB Retention	None
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Tray
Pitch - Mating Interface (in)	0.079 In
Pitch - Mating Interface (mm)	2.00 mm
Pitch - Term. Interface (in)	0.079 In
Pitch - Term. Interface (mm)	2.00 mm
Plating min: Mating (µin)	15
Plating min: Mating (µm)	0.38
Plating min: Termination (µin)	79
Plating min: Termination (µm)	2.00
Polarized to Mating Part	No
Polarized to PCB	No
Robotic Placement	None
Shrouded	No
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55°C to +105°C
Termination Interface: Style	Through Hole

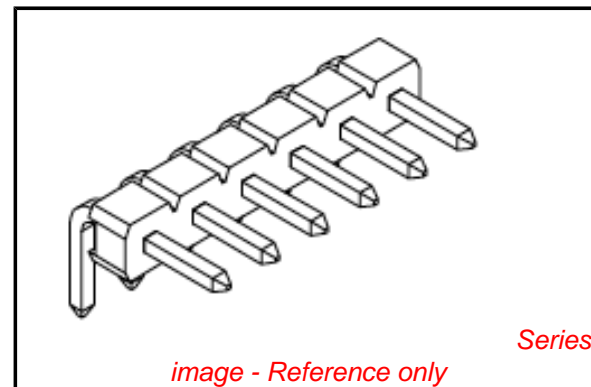

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Not Reviewed**
**Halogen-Free
Status
Not Reviewed**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

87754Series

Electrical

Current - Maximum per Contact

2A

Voltage - Maximum

125V





Material Info**Reference - Drawing Numbers**

Sales Drawing


SD-87754-100

This document was generated on 05/17/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

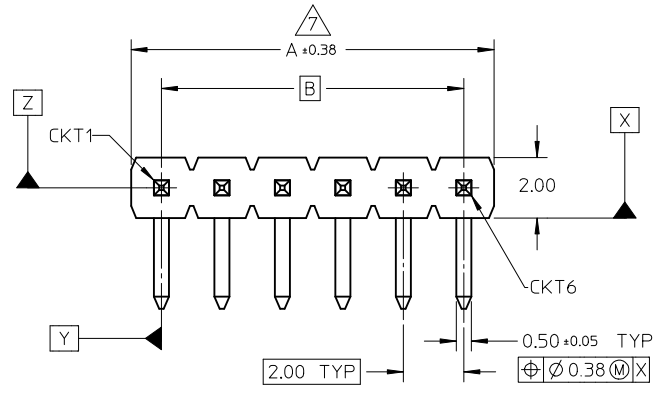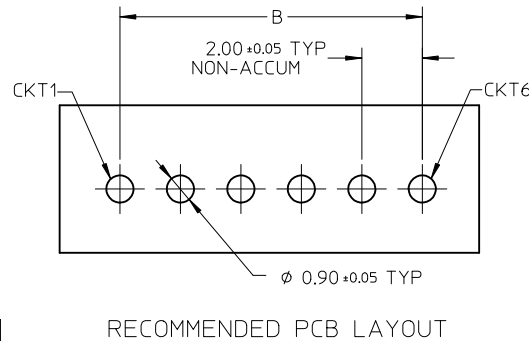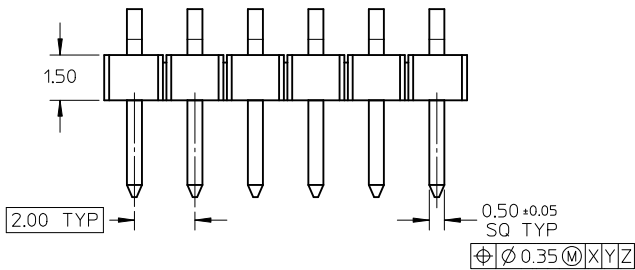

- NOTES:
- MATERIAL:
 - HOUSING: NYLON, GLASS FILLED, UL94V-0, COLOR: BLACK
 - PIN : COPPER ALLOY 0.50mm SQ.
 - PLATING TYPE:
 - (1) GOLD FLASH OVER
1.25µm MIN. NICKEL OVERALL
 - (2) 0.05µm MIN. GOLD PLATE ON CONTACT AND 2.50µm MIN. TIN ON SOLDER TAIL OVER
1.25µm MIN. NICKEL OVERALL.
 - (3) 0.38µm MIN. GOLD PLATE ON CONTACT AND 2.00µm MIN. TIN ON SOLDER TAIL OVER
1.25µm MIN. NICKEL OVERALL.
 - (4) 0.75µm MIN. GOLD PLATE ON CONTACT AND 2.00µm MIN. TIN ON SOLDER TAIL OVER
1.25µm MIN. NICKEL OVERALL.
 - (5) 2.50µm MIN. TIN OVERALL
1.25µm MIN. NICKEL OVERALL
 - THE ABOVE 6 CKT IS FOR ILLUSTRATION PURPOSE ONLY.
 - RECOMMENDED PCB THICKNESS 1.60mm
 - PRODUCT SPECIFICATION: PS-87761-100
 - WAFER TO BE FLAT WITHIN 0.003mm/mm
 - IRREGULAR CIRCUIT CUTOFF WITHIN BREAKAWAY SECTION IS PERMISSIBLE. CUTTING OR CHIPPING OF THE MAIN BODY IS NOT ACCEPTABLE.
 - PACKAGING SPECIFICATION:
 - (1) BULK : PK-89990-490
 - (2) TRAY : PK-89990-487

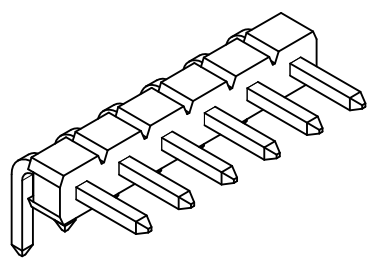

092-DW, + 877542552 EC NO: S2010-0925 DRWN:ATSEE 2010/05/06 CHKD:SKANG 2010/06/09 APPR:MLONG 2010/06/14	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
	$F_A=0$ $F_C=0$ $F_P=0$	mm	INCH	MM ONLY	NTS	METRIC		
	4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.2 ± --- 1 PLACE ± --- ± ---	ANGULAR ± 3 °		DRAWN BY	DATE	TITLE		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE TABLE		CWLAM	2007/07/20	CUSTOM HEADER 2.00MM PITCH SINGLE ROW HEADER, SINGLE WAFER, R/A		
REV	DESCRIPTION	MATERIAL NO.		APPROVED BY	DATE	MOLEX INCORPORATED		
A3		MLONG		MLONG	2009/12/04	DOCUMENT NO. SD-87754-100		
		SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
		A3		SHEET NO. 1 OF 2				

CKT SIZE	DIMENSION		PART NO FOR PE BAG PACKAGING	PART NO FOR TRAY PACKAGING	CKT SIZE	VOID POSITION	PLATING TYPE	DIMENSION					
	A	B						M	P	E	-	-	
02	4.00	2.00											
03	6.00	4.00	87754-4051	----	40	----	5	3.50	3.00	1.50	---	---	
04	8.00	6.00	----	87754-0352	03	----	5	7.00	4.60	1.20	---	---	
05	10.00	8.00											
06	12.00	10.00	----	87754-0552	05	----	3	4.00	2.60	1.50	---	---	
07	14.00	12.00											
08	16.00	14.00	----	87754-0553	05	----	5	7.00	4.60	1.20	---	---	
09	18.00	16.00											
10	20.00	18.00	----	87754-2552	25	----	5	3.00	2.80	1.50	---	---	
11	22.00	20.00											
12	24.00	22.00											
13	26.00	24.00											
14	28.00	26.00											
15	30.00	28.00											
16	32.00	30.00											
17	34.00	32.00											
18	36.00	34.00											
19	38.00	36.00											
20	40.00	38.00											
21	42.00	40.00											
22	44.00	42.00											
23	46.00	44.00											
24	48.00	46.00											
25	50.00	48.00											
26	52.00	50.00											
27	54.00	52.00											
28	56.00	54.00											
29	58.00	56.00											
30	60.00	58.00											
31	62.00	60.00											
32	64.00	62.00											
33	66.00	64.00											
34	68.00	66.00											
35	70.00	68.00											
36	72.00	70.00											
37	74.00	72.00											
38	76.00	74.00											
39	78.00	76.00											
40	80.00	78.00											

092-DW. + 877542552 EC NO: S2010-0925 DRWN:ATSEE 2010/05/06 CHKD:SKANG 2010/06/09 APPR:MLONG 2010/06/14	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION																	
	$F_A=0$ $F_C=0$ $F_P=0$	<table border="1"> <tr><th colspan="2">mm</th><th>INCH</th></tr> <tr><td>4 PLACES</td><td>± ---</td><td>± ---</td></tr> <tr><td>3 PLACES</td><td>± ---</td><td>± ---</td></tr> <tr><td>2 PLACES</td><td>± 0.2</td><td>± ---</td></tr> <tr><td>1 PLACE</td><td>± ---</td><td>± ---</td></tr> </table>	mm		INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± ---	2 PLACES	± 0.2	± ---	1 PLACE	± ---	± ---	MM ONLY	NTS	METRIC			
	mm		INCH																				
	4 PLACES	± ---	± ---																				
3 PLACES	± ---	± ---																					
2 PLACES	± 0.2	± ---																					
1 PLACE	± ---	± ---																					
DESCRIPTION	<table border="1"> <tr><th colspan="2">DRAWN BY</th><th>DATE</th></tr> <tr><td>CWLAM</td><td></td><td>2007/07/20</td></tr> <tr><th colspan="2">CHECKED BY</th><th>DATE</th></tr> <tr><td>KWLEE</td><td></td><td>2007/08/15</td></tr> <tr><th colspan="2">APPROVED BY</th><th>DATE</th></tr> <tr><td>MLONG</td><td></td><td>2009/12/04</td></tr> </table>	DRAWN BY		DATE	CWLAM		2007/07/20	CHECKED BY		DATE	KWLEE		2007/08/15	APPROVED BY		DATE	MLONG		2009/12/04	TITLE	CUSTOM HEADER 2.00MM PITCH SINGLE ROW HEADER,SINGLE WAFER, R/A		
DRAWN BY		DATE																					
CWLAM		2007/07/20																					
CHECKED BY		DATE																					
KWLEE		2007/08/15																					
APPROVED BY		DATE																					
MLONG		2009/12/04																					
REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE TABLE	MATERIAL NO.	DOCUMENT NO.	SHEET NO.																		
A3					2 OF 2																		